



12-606C2

WA-606 LED BEACON

DESCRIPTION

32 PCS SMD LED
Low Current Draw Consumption
PC Lens with Smooth Exterior Will Not Gather Dirt and Dust
Uniform 360 Degree Light Distribution---No Dark Spots
Magnetic Mount Use Up to 50mph/80kph
With Cigar Plug

VOLTAGE

10-30V

MOUNT

3 Sets Magnets/ Three Bolts/ Flat Pipe/ Surface Mount

CURRENT CONSUMPTION

Peak: 28W/ Average: 16W

APPROVALS

ECE R65(AMBER)/ R10(EMC)/ SAE CLASS 1

LENS COLOR

Clear or Color

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE



-40°C to +65°C

SEALING

0.5m

PACKAGING

Net Weight: ____KG Innerbox: 168*168*153mm
Outer Packing Carton: 528*352*327mm Packing Qty: 12PCS/CTN

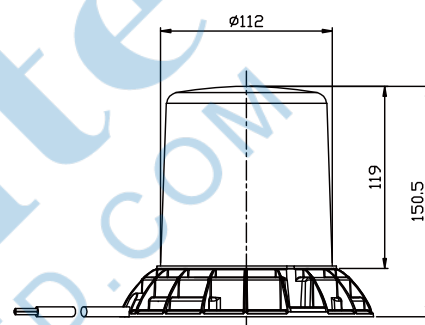

PART NUMBER	LED COLOR	MOUNT	APPROVALS	LEDs	OUTER LENS COLOR
12-606C2A-E	Amber	3 Sets Magnets/Three Bolts/Flat Pipe/Surface Mount	ECE R65/R10(EMC)	32PCS 0.5W SMD AMBER	Clear or Color
12-606C2B-E	Blue		ECE R10(EMC)	32PCS 0.5W SMD BLUE	
12-606C2R-E	Red		ECE R10(EMC)	32PCS 0.5W SMD RED	
12-606C2W-E	White		ECE R10(EMC)	32PCS 0.5W SMD WHITE	
12-606C2A-S	Amber	3 Sets Magnets/Three Bolts/Flat Pipe/Surface Mount	SAE J845 Class 1	32PCS 0.5W SMD AMBER	Clear or Color
12-606C2B-S	Blue		SAE J845 Class 1	32PCS 0.5W SMD BLUE	
12-606C2R-S	Red		SAE J845 Class 1	32PCS 0.5W SMD RED	
12-606C2W-S	White		SAE J845 Class 1	32PCS 0.5W SMD WHITE	

FLASH PATTERNS

Flash patterns	FPM (Flashes per minute)
Single	150
Double	74
Triple	76
Quad	75
Rotate	143

