







HDL-019A3WR-E-RHT-001
HDL-019A3WR-E-RHT-002

FEATURES

- Optional for manual or electric optical adjustment.
- Clear CUT-OFF line makes the vehicle safer while driving.
- High level EMC design, avoid electromagnetic interference to electronic equipments of the vehicle.
- Equipped with Temperature Control System(TCS),which both ensure the product lifetime and provides higher brightness.

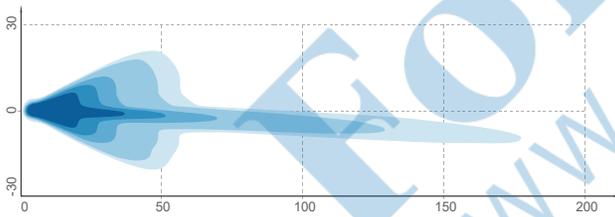

0°
0.6m
ECE (Left Hand Traffic)
Beam pattern: LB
Illuminance (LUX)
32 16 8 2 1

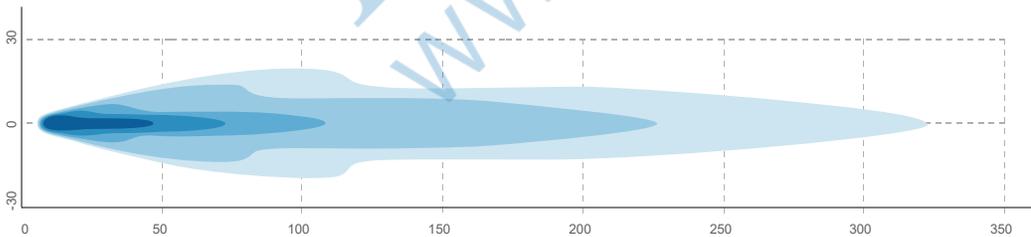

0°
0.6m
Beam pattern: HB
Illuminance (LUX)
32 16 8 2 1

Part NO.	Voltage	Function	Power	Material	Mounting	Connection	Approvals
HDL-019A3WR-E-RHT-001 HDL-019A3WR-E-RHT-002	DC 12 V	High Beam	19 W	Lens: PC+UV Coating Housing: PP-TD40	Screw	Cable	CCC/ ECE
		Low Beam	19 W				
		Day Runing Lamp	6.6 W				
		Front Position	7.4 W				
		Front Direction Indicator	7.4 W				

Working Lamp / Head Lamp