


441C2ARW
441 LED Combination Lamp
DESCRIPTION

Combination Lamp:ST/T/DI/Reflector Reflex/No.Plates;

Low Current Consumption;

Bolt Mounting/Screw Mounting;

Lens: PMMA;

Housing and Bracket: ABS (Black).

VOLTAGE

10-30V

MOUNT

Bolt Mounting/Screw Mounting

APPROVALS

ECE

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C


CABLE LENGTH

0.55m


PACKAGING

Net Weight: 0.15KGS Innerbox: 98*45*106mm


Outer Packing Carton: 515*250*223mm Packing Qty: 50 PCS/CTN



PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
CL-441C2ARW		ST/T/DI	ST/T: ECE R7 DI: ECE R6	ST/T: 8PCS SMD RED LED DI: 8PCS SMD AMBER LED	ST:3W/T:0.5W DI:3W
		REFLEX	ECE R3	/	/
		No.Plates	ECE R4	4PCS SMD WHITE LED	2W
STTD-441C2AR		ST/T/DI	ST/T: ECE R7 DI: ECE R6	ST/T: 8PCS SMD RED LED DI: 8PCS SMD AMBER LED	ST:3W/T:0.5W DI:3W
		REFLEX	ECE R3	/	/

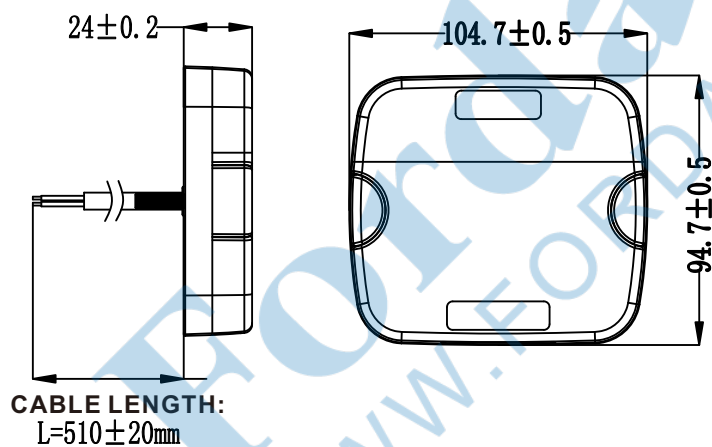

Signal wire:

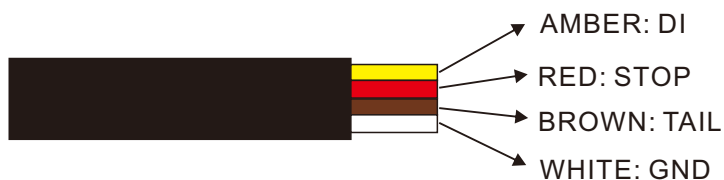



Fordalite
Guangzhou Forda Signal Co., Ltd

EFFICIENT SOLUTIONS FOR A BRIGHTER FUTURE



FTD-441




FTD-441C2AW

Voltage	12V/24V
Function	Front position, Front DI
Power	Position: 1W; DI: 2.7W;
Mount	Bolt mount (M5*20) Screw installation (self tapping screw 4.2*20)
Connection	ECE: Position R7; DI R6; Reflex Reflector R3;
Approval	ultrasonic welding
Sealing	IP67
IP level	PMMA, yellow & clear
Lens material	ABS, black
Housing material	Inner box: 100*55*115mm Carton size: 525*310*253mm 1 case: 50PCS



Illuminance distribution

Size

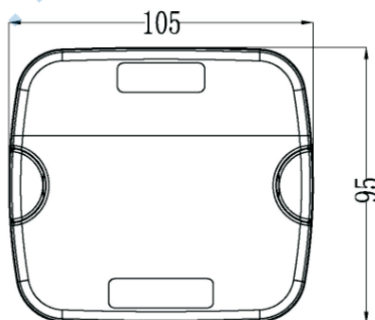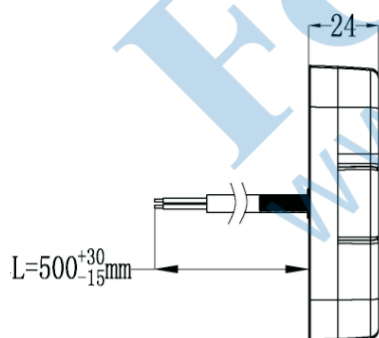



Fordalite
Guangzhou Forda Signal Co., Ltd

EFFICIENT SOLUTIONS FOR A BRIGHTER FUTURE



REVF-441C2RW

rear fog/reverse Lamp 441

Voltage	12V/24V
Function	rear fog/Reverse
Power	Fog:3.5W;reverse:2W
Mount	Mounting bolt(M5*20) screw mount (Self-tapping screw4.2*20)
Connection	Cable L= 500mm
Approval	ECE:R38/R23/R3
Seal	Ultrasonic welding
IP level	IP67
Lens material	PMMA
Housing material	ABS
Packing	Box:100*55*115mm Outer carton:525*310*253mm Qty/Carton:50PCS



Size

