





INL-038 系列室内灯

产品特色


- 低功率，高亮度
- 出线、触摸开关和PIR开关可选
- 超薄，紧凑型设计
- 经济实惠

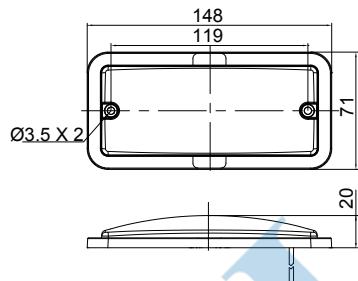


INL-038A2W-ST-WI

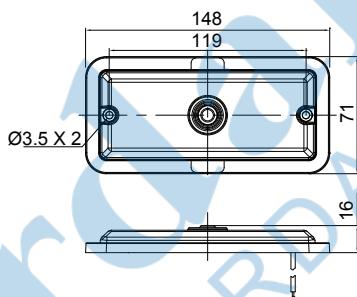

INL-038C2W-SW

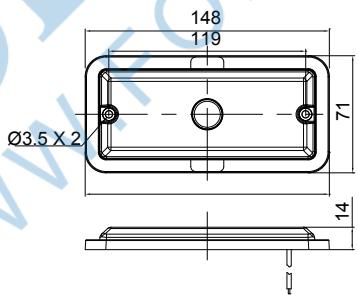

INL-038C2W-PIR

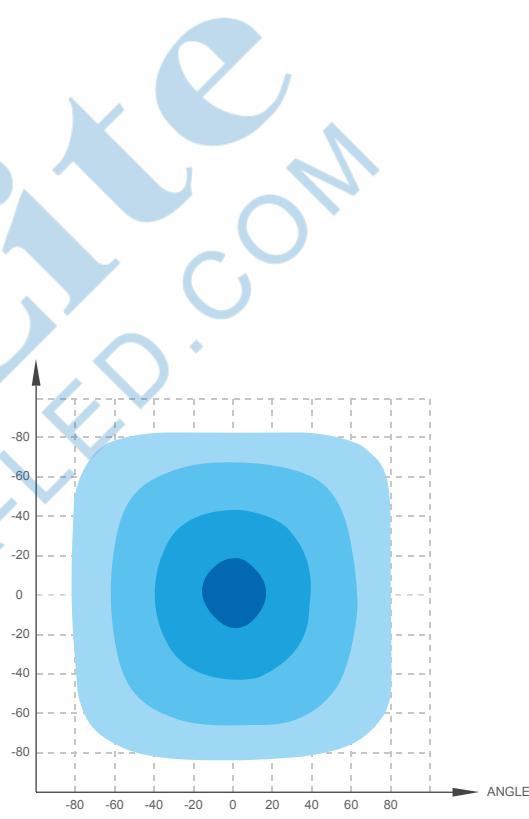

型号	电压	功率	流明	色温	安装方式	连接方式
INL-038A2W-ST-WI	DC 12 V	理论功率： 15 PCS * 0.5 W 实际功率：6.4 W	理论流明： 750 LM 实际流明： 525±50 LM	5500±550 K		
INL-038C2W-ST-WI-NHP	DC 10-30 V	理论功率： 14 PCS * 0.5 W 实际功率：5.6 W	理论流明： 700 LM 实际流明： 525±50 LM	5500±550 K	螺钉安装	UL 1015 20# 200 mm单线
INL-038C2W-SW	DC 10-30 V	理论功率： 14 PCS * 0.5 W 实际功率：8.1 W	理论流明： 700 LM 实际流明： 560±56 LM	5500±500 K		
INL-038C2W-PIR						