



SIGNAL LAMP

REAR LAMP

HEAD LAMP

WORK LAMP

LIGHT BAR

DIRECTIONAL WARNING LAMP

BEACON



OTHER

The symbols listed are used in product information charts throughout this specification.

	PART NUMBER		OPERATING TEMPERATURE: -40°C to +65°C
	DESCRIPTION		IP67
	POWER CONSUMPTION		WARRANTY: 1 YEAR
	VOLTAGE		WARRANTY: 3 YEARS
	CURRENT CONSUMPTION		APPROVAL
	FUNCTION		APPROVAL: ECE R65
	MOUNTING		APPROVAL: SAE J845 CLASS 1
	FLASH PATTERNS		APPROVAL: SAE J845 CLASS 2
	FLASHES PER MINUTE		APPROVAL: SAE J845 CLASS3
	LEDs COLOR		PACKING
	LENs COLOR		Net Weight
	RED		Innerbox
	AMBER		Packing Qty
	BLUE		Outer PackingCarton
	WHITE		MAGNETIC MOUNTING
	THE NUMBER OF LED		DIN POLE MOUNTING
	CABLE LENGTH		SINGLE BOLT
	DEUTSCH CONNECTOR		SURFACE MOUNTING
	NEW PRODUCT		1"THREADED PIPE MOUNTING
	LIGHT OUTPUT: LUMEN		



NEW



FD-SLD-12

Smart load device



Low Current Consumption;
Base material: Aluminium alloy, Black powder coated
Operating voltage range: 12V-10.8Volts DC to 13.8Volts DC

The 'Resistor for Direction Indicator' is designed only for use with LED Rear Lamps on vehicles using a traditional bulb unit. Correct operation cannot be guaranteed if used in any other application or on a vehicle with an advanced lighting system controller.



0.45KGS


50PCS/CTN



75*32*100mm



395*180*218mm

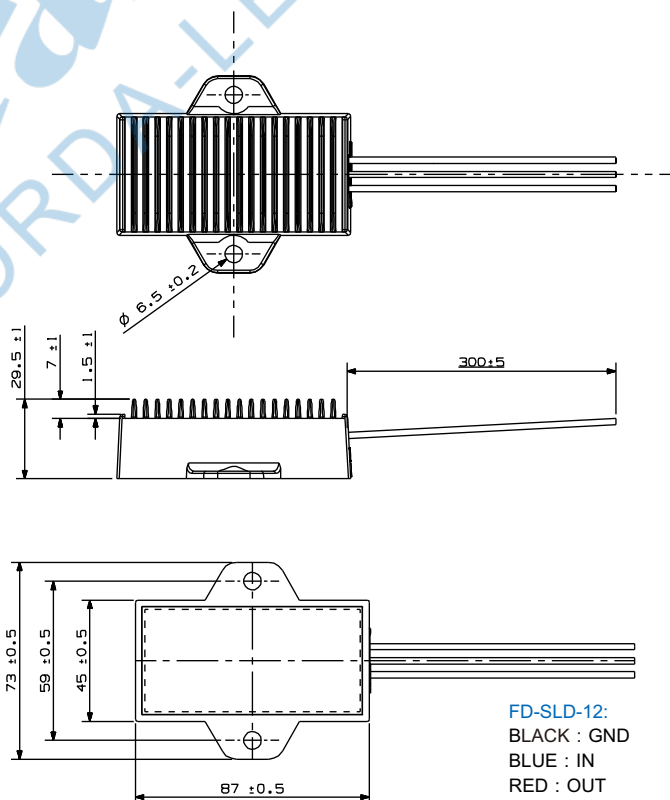

FD-SLD-12:
BLACK : GND
BLUE : IN
RED : OUT

#	⚡	CA	⚙️
FD-SLD-12	12V	L=320MM	Resistor



SIGNAL LAMP

REAR LAMP

HEAD LAMP

WORK LAMP


LIGHT BAR

DIRECTIONAL WARNING LAMP

BEACON

OTHER

NEW



FD-SLD-24

Smart load device



Low Current Consumption;
Base material: Aluminium alloy, Black powder coated
Operating voltage range: 24V-21.8Volts DC to 28.0Volts DC

The 'Resistor for Direction Indicator' is designed only for use with LED Rear Lamps on vehicles using a traditional bulb unit. Correct operation cannot be guaranteed if used in any other application or on a vehicle with an advanced lighting system controller.



0.45KGS




75*32*100mm



50PCS/CTN



395*180*218mm

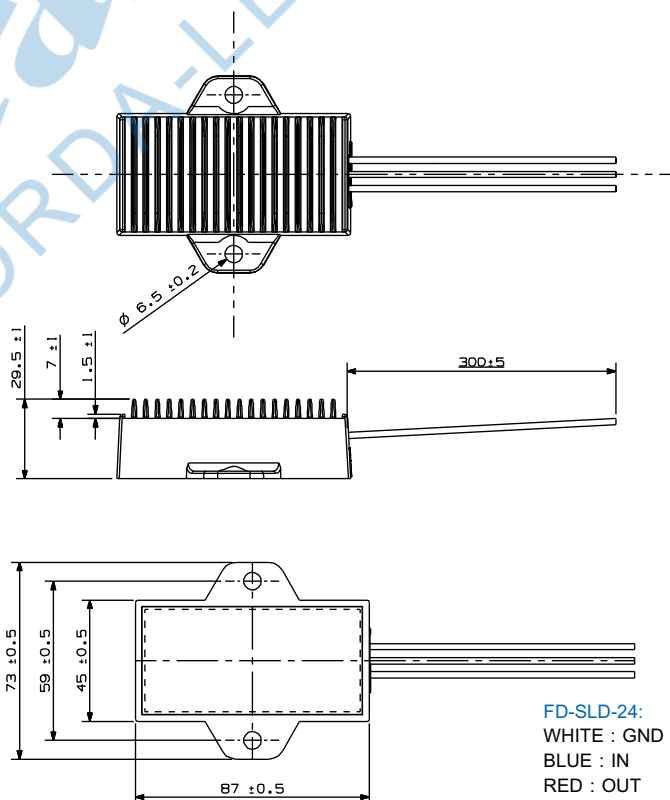

FD-SLD-24:
WHITE : GND
BLUE : IN
RED : OUT

#	⚡	CA	⚙️
FD-SLD-24	24V	L=320MM	Resistor