



12-F9C3-2BBC

F9 LED LIGHT BAR

DESCRIPTION

24 PCS SMD LED
Low Current Consumption
PC Dome with Smooth Exterior Will Not Gather Dirt and Dust
Uniform 360 Degree Light Distribution---No Dark Spots
Low-profile

VOLTAGE

10-30V

MOUNT

4 Sets Magnets or 4PCS Bolts

CURRENT CONSUMPTION

Peak : 70W / Average: 48W

APPROVALS

ECE R65(AMBER)/R10(EMC)
SAE J845 CLASS 1

LENS COLOR

Clear or Color

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE




-40°C to +65°C

CABLE LENGTH

0.5m cable OR 2.5m cable with double switches cigar connector

PACKAGING

Net Weight:2.34KG Innerbox: 395*268*82mm
Outer Packing Carton: 435*282*425mm Packing Qty: 10PCS/CTN

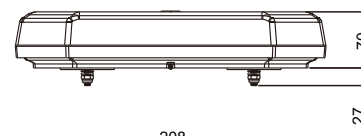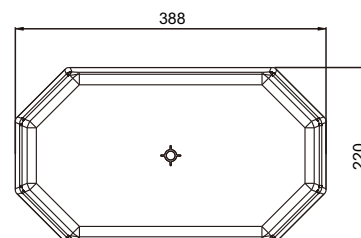

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
12-F9C2A-2BBC		FLASH	SAE J845 Class 1/ ECE R65/R10(EMC)	24PCS SMD AMBER LED	48-70W
12-F9C2B-2BBC			SAE J845 Class 1/ ECE R10(EMC)	24PCS SMD BLUE LED	48-70W
12-F9C2R-2BBC			SAE J845 Class 1/ ECE R10(EMC)	24PCS SMD RED LED	48-70W
12-F9C2W-2BBC			SAE J845 Class 1/ ECE R10(EMC)	24PCS SMD WHITE LED	48-70W
12-F9C2R/W-2BBC			SAE J845 Class 1/ ECE R10(EMC)	12PCS SMD RED LED 12PCS SMD WHITE LED	48-70W
12-F9C2A/W-2BBC			SAE J845 Class 1/ ECE R10(EMC)	12PCS SMD AMBER LED 12PCS SMD WHITE LED	48-70W
12-F9C2R/A-2BBC			SAE J845 Class 1/ ECE R10(EMC)	12PCS SMD RED LED 12PCS SMD AMBER LED	48-70W
12-F9C2B/A-2BBC			SAE J845 Class 1/ ECE R10(EMC)	12PCS SMD BLUE LED 12PCS SMD AMBER LED	48-70W

Flash patterns

Flash patterns	FPM (Flashes per minute)
1.Single(1)	150
2.Single(2)	75
3.Double(1)	150
4.Double(2)	75
5.Triple	73
6.Quad	73
7.Front-Rear split(1)	150
8.Front-Rear split(2)	75
9.Rotate(1)	150
10.Rotate(2)	75



Efficient solutions for a brighter future



Fordalite
Guangzhou Forda Signal Co., Ltd



LED EMERGENCY LAMPS

12-F9C2-8MZ

F9 LED LIGHT BAR

DESCRIPTION

Low Current Consumption
PC Dome with Smooth Exterior Will Not Gather Dirt and Dust
Uniform 360 Degree Light Distribution---No Dark Spots
Low-profile

VOLTAGE

10-30V

MOUNT

4 Sets Magnets or 4PCS Bolts

CURRENT CONSUMPTION

Peak : 42W / Average: 36W

APPROVALS

ECE R10(EMC)

LENS COLOR

Clear or Color

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C




CABLE LENGTH

0.5m cable OR 2.5m cable with double switches cigar connector

PACKAGING

Net Weight: 2.489KG Innerbox: 395*268*82mm

Outer Packing Carton: 435*282*425mm Packing Qty: 10PCS/CTN

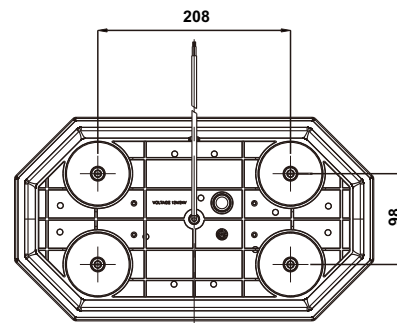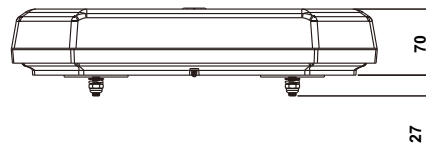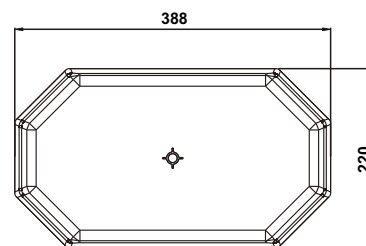

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
12-F9C2A-8MZ		FLASH	ECE R10(EMC)	32PCS SMD AMBER LED	36-42W
12-F9C2B-8MZ			ECE R10(EMC)	32PCS SMD BLUE LED	36-42W
12-F9C2R-8MZ			ECE R10(EMC)	32PCS SMD RED LED	36-42W
12-F9C2W-8MZ			ECE R10(EMC)	32PCS SMD WHITE LED	36-42W

FLASH PATTERN

1	Single	2	Double
3	Quint	4	Rotate
5	Combination		

LED EMERGENCY LAMPS




12-F9C2-E/S
F9 LED LIGHT BAR
DESCRIPTION

Low Current Consumption
 PC Dome with Smooth Exterior Will Not Gather Dirt and Dust
 Uniform 360 Degree Light Distribution---No Dark Spots
 Low-profile

VOLTAGE

10-30V

MOUNT

4 Sets Magnets or 4PCS Bolts

CURRENT CONSUMPTION

Peak : 39W / Average: 28W

APPROVALS

ECE R65(AMBER)/R10(EMC)
 SAE J845 CLASS 1

LENS COLOR

Clear or Color

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C




CABLE LENGTH

0.5m cable OR 2.5m cable with double switches cigar connector

PACKAGING

Net Weight:2.489KG Innerbox: 395*268*82mm

Outer Packing Carton: 435*282*425mm Packing Qty: 10PCS/CTN

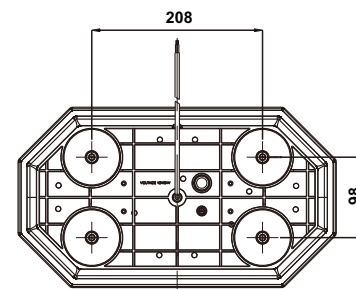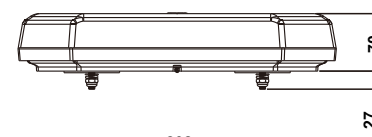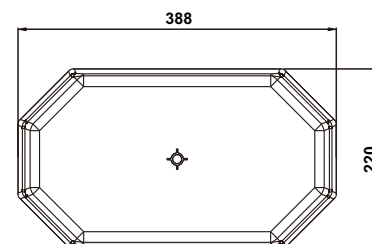

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
12-F9C2A-E		FLASH	ECE R65/R10(EMC)	56PCS SMD AMBER LED	28-39W
12-F9C2B-E			ECE R10(EMC)	56PCS SMD BLUE LED	28-39W
12-F9C2R-E			ECE R10(EMC)	56PCS SMD RED LED	28-39W
12-F9C2W-E			ECE R10(EMC)	56PCS SMD WHITE LED	28-39W
12-F9C2A-S			SAE J845 Class1	56PCS SMD AMBER LED	28-39W
12-F9C2B-S			SAE J845 Class1	56PCS SMD BLUE LED	28-39W
12-F9C2R-S			SAE J845 Class1	56PCS SMD RED LED	28-39W
12-F9C2W-S			SAE J845 Class1	56PCS SMD WHITE LED	28-39W

FLASH PATTERN

1	Rear-Side-Front-Full	2	split
3	Triple	4	Combination
5	Rotate	6	Rotate (explosion)
7	Speed (split)-Full	8	Speed (full)-Split
9	Quint	10	Full-Split-Rotate