



STT-028

FEATURES



- Diffuse rear position
- Reflex function is added
- Available in chrome ring
- Low profile design makes product super thin and compact



STT-028C2R
(Common Version)



STT-028C2R-CR
(Chroming Ring Version)

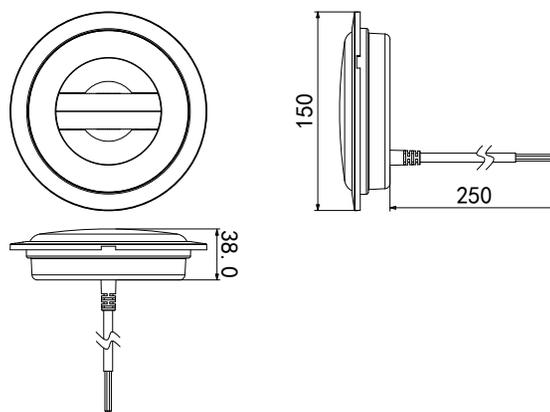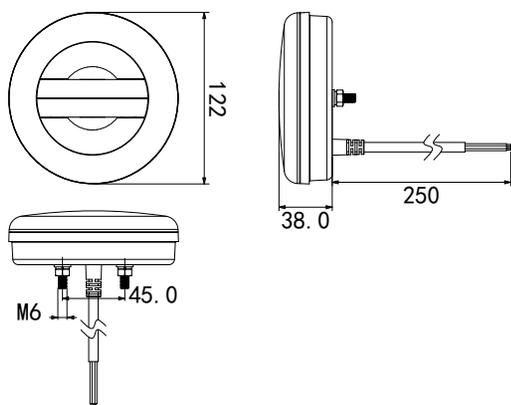

Function	Voltage	Material	Mounting	Connection	Sealing	Temperature
Tail Stop Reflex	DC 10-30V	Lens:PMMA Housing:ABS	Screw / Chroming Ring	250mm Cable	Ultrasonic Welding	-40°C to +65°C



STTD-028

FEATURES



- Diffuse rear position
- Reflex function is added
- Available in chrome ring
- Low profile design makes product super thin and compact



STTD-028C2AR
(Common Version)



STTD-028C2AR-CR
(Chroming Ring Version)

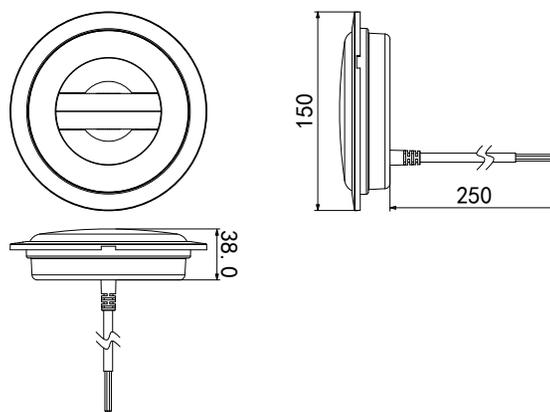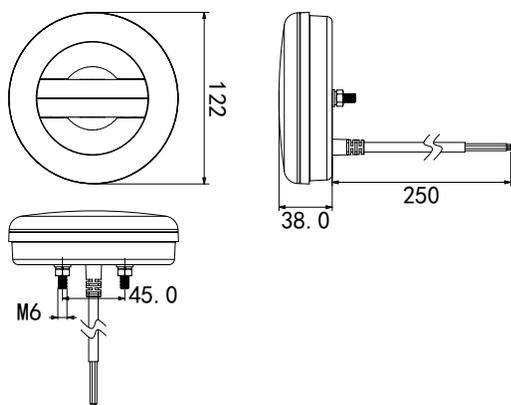

Function	Voltage	Material	Mounting	Connection	Sealing	Temperature
Tail Stop DI Reflex	DC 10-30V	Lens:PMMA Housing:ABS	Screw / Chroming Ring	250mm Cable	Ultrasonic Welding	-40°C to +65°C



TD-028

FEATURES



- Diffuse rear position
- Reflex function is added
- Available in chrome ring
- Low profile design makes product super thin and compact



TD-028C2RA
(Common Version)



TD-028C2RA-CR
(Chroming Ring Version)

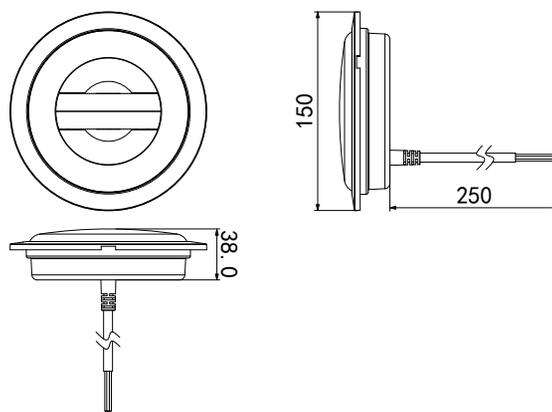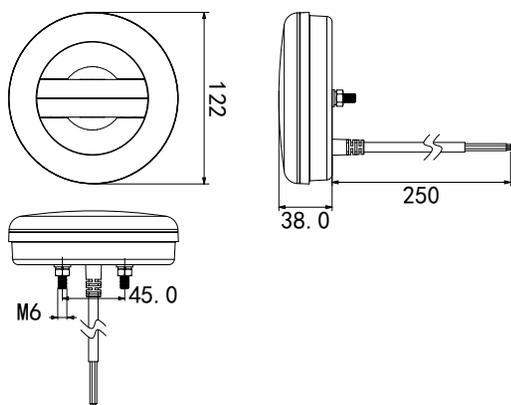

Function	Voltage	Material	Mounting	Connection	Sealing	Temperature
Tail DI Reflex	DC 10-30V	Lens:PMMA Housing:ABS	Screw / Chroming Ring	250mm Cable	Ultrasonic Welding	-40°C to +65°C



TR-028

FEATURES



- Diffuse rear position
- Reflex function is added
- Available in chrome ring
- Low profile design makes product super thin and compact



TR-028C2RW
(Common Version)



TR-028C2RW-CR
(Chroming Ring Version)

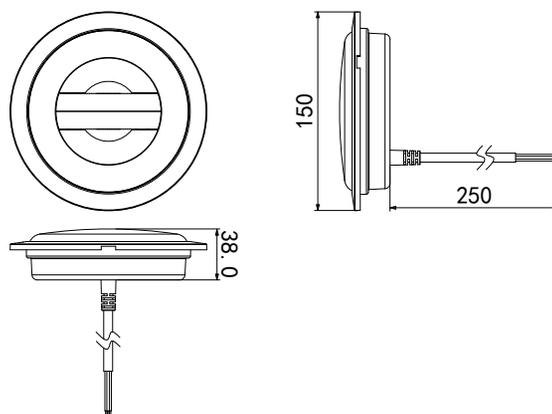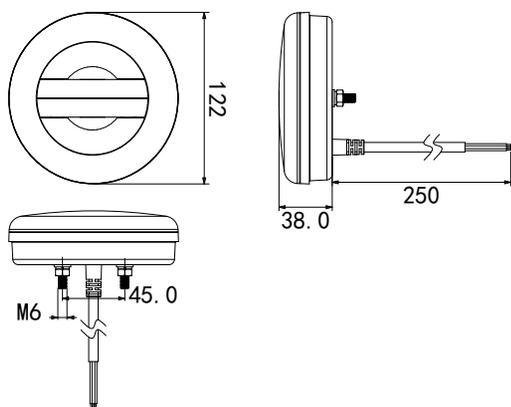

Function	Voltage	Material	Mounting	Connection	Sealing	Temperature
Tail Reverse Reflex	DC 10-30V	Lens:PMMA Housing:ABS	Screw / Chroming Ring	250mm Cable	Ultrasonic Welding	-40°C to +65°C