

**10-50C2R-M6**

**Ø122mm LAMP**

**DESCRIPTION**

SMD LED  
Low Current Consumption  
Reverse Polarity Protected  
Rugged Solid LEDs Can Withstand Shock & Vibration  
10-30V

**VOLTAGE**

Stop: 2W Rear Position: 0.5W

**POWER CONSUMPTION**

Stainless Steel Mounting Screws, Mtg Ctrs: 45mm

**MOUNT**

ECE

**APPROVALS**

**LENS COLOR**

Clear or Color

**WARRANTY**

3 Years

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**



-40° C to +65° C

**CABLE LENGTH**

0.26m

**PACKAGING**

Net Weight: 0.21KG Innerbox: 126\*126\*68mm  
Outer Packing Carton: 526\*396\*370mm Packing Qty: 60PCS/CTN

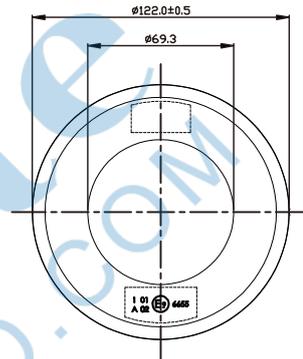


PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
10-50C2R-M6	●	ST/T	ECE R7	24 PCS 0.2W SMD RED	ST: 2W T: 0.5W
11-50C2A-M6	●	FRONT DI	ECE R6	24 PCS 0.2W SMD AMBER	2W
		REAR DI	ECE R6	24 PCS 0.2W SMD AMBER	2W
13-50C2W-M6	○	REVERSE	ECE R23	24 PCS 0.2W SMD WHITE	1.5W
14-50C2R-M6	●	REAR FOG	ECE R38	24 PCS 0.2W SMD RED	2W
17-50C2AR-M6	●	REAR DI	ECE R6	24 PCS 0.2W SMD AMBER	1.5W
		ST/T	ECE R7	12 PCS 0.2W SMD RED	ST: 2W T: 0.5W
17-50C2RW-M6	○	REVERSE	ECE R23	12 PCS 0.2W SMD RED	1.5W
		REAR FOG	ECE R38	12 PCS 0.2W SMD WHITE	0.5W
17-50C2AW-M6	●	FRONT DI	ECE R6	12 PCS 0.2W SMD AMBER	1.5W
		FRONT POSITION	ECE R7	24 PCS 0.2W SMD WHITE	0.5W


**14-50C2R-M6 REAR FOG**



**11-50C2A-M6 FRONT/REAR DI**



**13-50C2W-M6 REVERSE**



**17-50C2AR-M6 ST/T/REAR DI**



**17-50C2AW-M6 FRONT DI/FRONT POSITION**



**17-50C2RW-M6 REVERSE/REAR FOG**



**LED BEACON**

