



10-601C2R

Ø122mm LAMP(Chrome Ring)

DESCRIPTION

SMD LED
Low Current Consumption
Reverse Polarity Protected
Rugged Solid LEDs Can Withstand Shock & Vibration
10-30V

VOLTAGE

Stop: 2W Rear Position: 0.5W

POWER CONSUMPTION

Stainless Steel Mounting Screws, Mtg Ctrs: 45mm

MOUNT

ECE

APPROVALS

Clear or Color

LENS COLOR

WARRANTY

3 Years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40° C to +65° C

CABLE LENGTH


0.26m

PACKAGING

Net Weight: 0.22KG Innerbox: 159*59*159mm
Outer Packing Carton: 333*318*340mm Packing Qty: 20PCS/CTN




10-601C2R ST/T

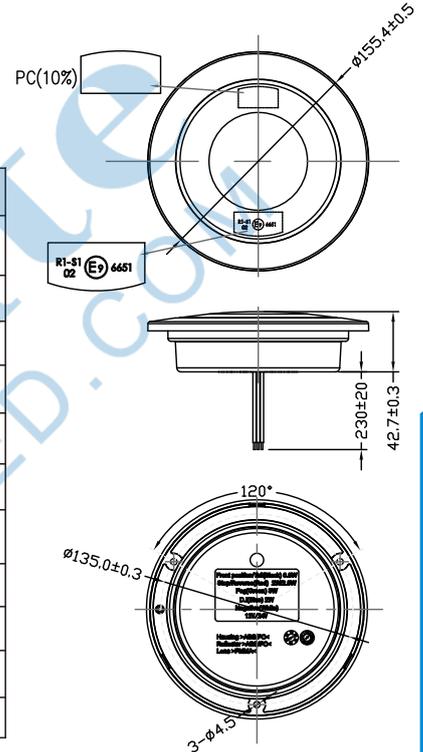


PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
10-601C2R	●	ST/T	ECE R7	24 PCS 0.2W SMD RED	ST: 2W T: 0.5W
11-601C2A	●	FRONT DI	ECE R6	24 PCS 0.2W SMD AMBER	2W
		REAR DI	ECE R6	24 PCS 0.2W SMD AMBER	2W
13-601C2W	○	REVERSE	ECE R23	24 PCS 0.2W SMD WHITE	1.5W
14-601C2R	●	REAR FOG	ECE R38	24 PCS 0.2W SMD RED	2W
17-601C2AR	●	REAR DI	ECE R6	24 PCS 0.2W SMD AMBER	1.5W
		ST/T	ECE R7	12 PCS 0.2W SMD RED	ST: 2W T: 0.5W
17-601C2RW	○	REVERSE	ECE R23	12 PCS 0.2W SMD RED	1.5W
		REAR FOG	ECE R38	12 PCS 0.2W SMD WHITE	0.5W
17-601C2AW	○	FRONT DI	ECE R6	12 PCS 0.2W SMD AMBER	1.5W
		FRONT POSITION	ECE R7	24 PCS 0.2W SMD WHITE	0.5W


14-601C2R REAR FOG



11-601C2A FRONT/REAR DI




13-601C2W REVERSE




17-601C2AR ST/T/REAR DI



17-601C2AW FRONT DI/
FRONT POSITION



17-601C2RW REVERSE/
REAR FOG



LED BEACON

