



10-40C2R-III Ø95mm LAMP(Chrome Ring)

DESCRIPTION

SMD LED
Low Current Consumption
Reverse Polarity Protected
Rugged Solid LEDs Can Withstand Shock & Vibration
10-30V
Stop: 2W Rear Position: 0.5W
Designed to Be Mounted Horizontally, 2Holes Surface Mount

**VOLTAGE
POWER CONSUMPTION
MOUNT**

**APPROVALS
LENS COLOR**




**WARRANTY
WATERPROOF**

OPERATING TEMPERATURE

CABLE LENGTH

PACKAGING

ECE
Clear or Color
3 Years
IP 67
-40° C to +65° C
0.26m
Net Weight: 0.1KG Innerbox: 105*52*105mm
Outer Packing Carton: 550*285*232mm Packing Qty: 50PCS/CTN

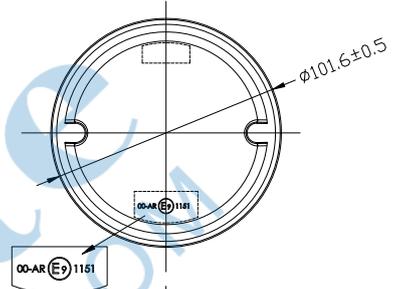

| PART NUMBER | LED COLOR | FUNCTION | APPROVALS | LEDs | POWER |
|---------------|--------------|----------------|-----------|-----------------------|-------------------|
| 10-40C2R-III | Red | ST/T | ECE R7 | 17 PCS 0.2W SMD RED | ST: 2W T: 0.5W |
| 11-40C2A-III | Yellow | FRONT DI | ECE R6 | 17 PCS 0.2W SMD AMBER | 2W |
| | | REAR DI | ECE R6 | 17 PCS 0.2W SMD AMBER | 2W |
| 13-40C2W-III | White | REVERSE | ECE R23 | 12 PCS 0.2W SMD WHITE | 1.5W |
| 14-40C2R-III | Red | REAR FOG | ECE R38 | 17 PCS 0.2W SMD RED | 2W |
| 17-40C2AR-III | Yellow/Red | REAR DI | ECE R6 | 7 PCS 0.2W SMD AMBER | 1.5W |
| | | ST/T | ECE R7 | 10 PCS 0.2W SMD RED | ST: 2W T: 0.5W |
| 17-40C2AW-III | Yellow/White | FRONT DI | ECE R6 | 14 PCS 0.2W SMD AMBER | 1.5W |
| | | FRONT POSITION | ECE R7 | 3 PCS 0.2W SMD WHITE | 0.5W |

14-40C2R-III REAR FOG



17-40C2AR-III ST/T/REAR DI



13-40C2W-III REVERSE



11-40C2A-III FRONT/REAR DI



17-40C2AW-III FRONT DI/ FRONT POSITION



LED BEACON

