



10-40C2R-II

Ø95mm LAMP

DESCRIPTION

SMD LED
Low Current Consumption
Reverse Polarity Protected
Rugged Solid LEDs Can Withstand Shock & Vibration

VOLTAGE

10-30V

POWER CONSUMPTION

Stop: 2W Rear Position: 0.5W

MOUNT

Designed to Be Mounted Horizontally, 2Holes Surface Mount

APPROVALS

ECE

LENS COLOR

Clear or Color

WARRANTY

3 Years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40° C to +65° C

CABLE LENGTH



0.26m

PACKAGING

Net Weight: 0.097KG Innerbox: 97*39*97mm
Outer Packing Carton: 505*215*216mm Packing Qty: 50PCS/CTN



10-40C2R-II ST/T

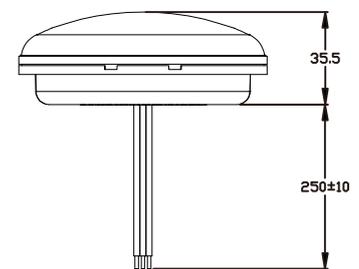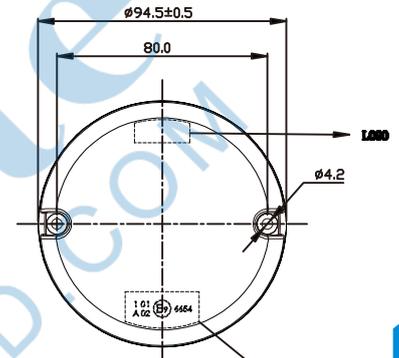

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
10-40C2R-II	●	ST/T	ECE R7	17 PCS 0.2W SMD RED	ST: 2W T: 0.5W
11-40C2A-II	●	FRONT DI	ECE R6	17 PCS 0.2W SMD AMBER	2W
		REAR DI	ECE R6	17 PCS 0.2W SMD AMBER	2W
13-40C2W-II	○	REVERSE	ECE R23	12 PCS 0.2W SMD WHITE	1.5W
14-40C2R-II	●	REAR FOG	ECE R38	17 PCS 0.2W SMD RED	2W
17-40C2AR-II	●	REAR DI	ECE R6	7 PCS 0.2W SMD AMBER	1.5W
		ST/T	ECE R7	10 PCS 0.2W SMD RED	ST: 2W T: 0.5W
17-40C2AW-II	●	FRONT DI	ECE R6	14 PCS 0.2W SMD AMBER	1.5W
		FRONT POSITION	ECE R7	3 PCS 0.2W SMD WHITE	0.5W

14-40C2R-II REAR FOG



17-40C2AR-II ST/T/REAR DI



17-40C2AW-II FRONT DI/ FRONT POSITION



13-40C2W-II REVERSE



11-40C2A-II FRONT/REAR DI



LED BEACON

