


**441C2ARW**
**441 LED Combination Lamp**
**DESCRIPTION**

Combination Lamp:ST/T/DI/Reflector Reflex/No.Plake;

Low Current Consumption;

Bolt Mounting/Screw Mounting;

Lens: PMMA;

Housing and Bracket: ABS (Black).

**VOLTAGE**

10-30V

**MOUNT**

Bolt Mounting/Screw Mounting

**APPROVALS**

ECE

**WARRANTY**

3 years

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C


**CABLE LENGTH**

0.55m


**PACKAGING**

Net Weight: 0.15KGS Innerbox: 98\*45\*106mm


Outer Packing Carton: 515\*250\*223mm Packing Qty: 50 PCS/CTN

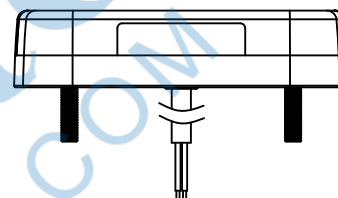

| PART NUMBER  | LED COLOR                                                                         | FUNCTION | APPROVALS                  | LEDs                                             | POWER                 |
|--------------|-----------------------------------------------------------------------------------|----------|----------------------------|--------------------------------------------------|-----------------------|
| CL-441C2ARW  |  | ST/T/DI  | ST/T: ECE R7<br>DI: ECE R6 | ST/T: 8PCS SMD RED LED<br>DI: 8PCS SMD AMBER LED | ST:3W/T:0.5W<br>DI:3W |
|              |                                                                                   | REFLEX   | ECE R3                     | /                                                | /                     |
|              |                                                                                   | No.Plake | ECE R4                     | 4PCS SMD WHITE LED                               | 2W                    |
| STTD-441C2AR |                                                                                   | ST/T/DI  | ST/T: ECE R7<br>DI: ECE R6 | ST/T: 8PCS SMD RED LED<br>DI: 8PCS SMD AMBER LED | ST:3W/T:0.5W<br>DI:3W |
|              |                                                                                   | REFLEX   | ECE R3                     | /                                                | /                     |

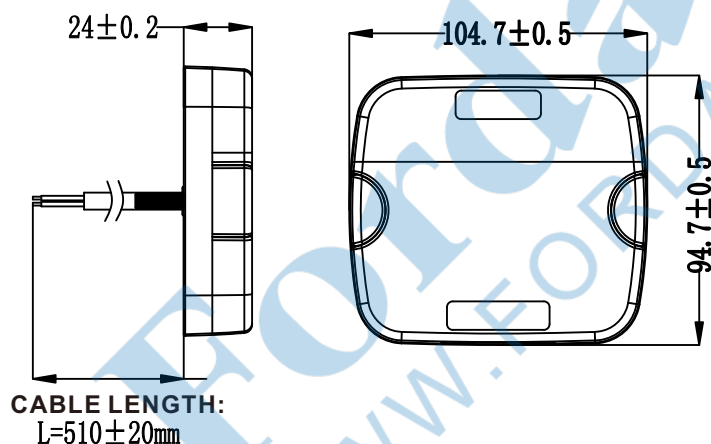

Signal wire:

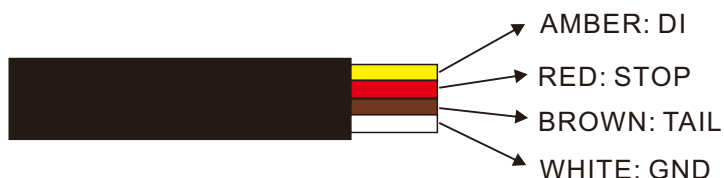



**Fordalite**  
Guangzhou Forda Signal Co., Ltd

EFFICIENT SOLUTIONS FOR A BRIGHTER FUTURE



## FTD-441




|                         |                                                                        |
|-------------------------|------------------------------------------------------------------------|
| <b>Voltage</b>          | 12V/24V                                                                |
| <b>Function</b>         | Front position, Front DI                                               |
| <b>Power</b>            | Position: 1W; DI: 2.7W;                                                |
| <b>Mount</b>            | Bolt mount (M5*20)<br>Screw installation (self tapping screw 4.2*20)   |
| <b>Connection</b>       | ECE: Position R7; DI R6;<br>Reflex Reflector R3;                       |
| <b>Approval</b>         | ultrasonic welding                                                     |
| <b>Sealing</b>          | IP67                                                                   |
| <b>IP level</b>         | PMMA, yellow & clear                                                   |
| <b>Lens material</b>    | ABS, black                                                             |
| <b>Housing material</b> | Inner box: 100*55*115mm<br>Carton size: 525*310*253mm<br>1 case: 50PCS |

## FTD-441C2AW



## Illuminance distribution

## Size

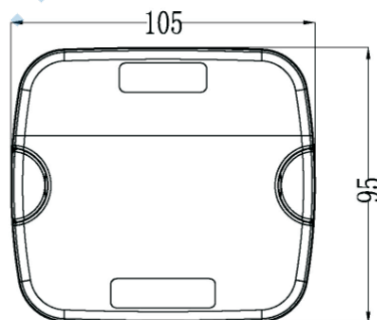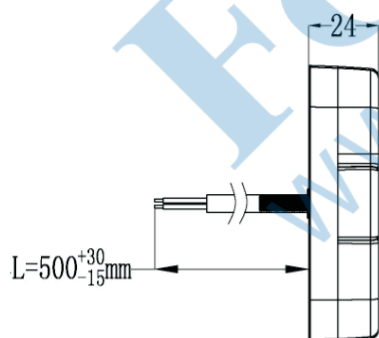



**REVF-441C2RW**

**rear fog/reverse Lamp 441**

|                         |                                                                    |
|-------------------------|--------------------------------------------------------------------|
| <b>Voltage</b>          | 12V/24V                                                            |
| <b>Function</b>         | rear fog/Reverse                                                   |
| <b>Power</b>            | Fog:3.5W;reverse:2W                                                |
| <b>Mount</b>            | Mounting bolt(M5*20)<br>screw mount (Self-tapping<br>screw4.2*20)  |
| <b>Connection</b>       | Cable L= 500mm                                                     |
| <b>Approval</b>         | ECE:R38/R23/R3                                                     |
| <b>Seal</b>             | Ultrasonic welding                                                 |
| <b>IP level</b>         | IP67                                                               |
| <b>Lens material</b>    | PMMA                                                               |
| <b>Housing material</b> | ABS                                                                |
| <b>Packing</b>          | Box:100*55*115mm<br>Outer carton:525*310*253mm<br>Qty/Carton:50PCS |



**Size**

