

10-452C2R

452 Lamp

DESCRIPTION

Low Current Consumption;
Cable Outlet/Connector Option;
Rubber Ring Mounting/Horizontal/Vertical Mounting;
Housing: ABS/PC (white).

VOLTAGE

12-24V

MOUNT

Rubber Ring Mounting/Horizontal or Vertical Mounting

APPROVALS

ECE:R7/DOT/ADR

LENS COLOR

Clear or Red

WARRANTY

3 years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C

PACKAGING

Net Weight:0.23KG Innerbox:166*119*520mm
Outer Packing Carton: 620 *348 *290mm Packing Qty:50PCS/CTN



CDP-017



CDP-018

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
10-452C2R	Red	ST/T	ECE R7 DOT/ADR	13PCS 0.2W SMD RED LED	ST:3W TAIL:0.4W
11-452C2A	Yellow	REAR DI	ECE R6 DOT/ADR	13PCS 0.2W SMD AMBER LED	3W
12-452C2W	White	REVERSE	ECE R23 DOT/ADR	13PCS 0.2W SMD WHITE LED	3W



11-452C2A-BR REAR DI



12-452C2W-BR REVERSE



10-452C2R-BR ST/T





11-452C2A REAR DI



12-452C2W REVERSE



10-452C2R ST/T

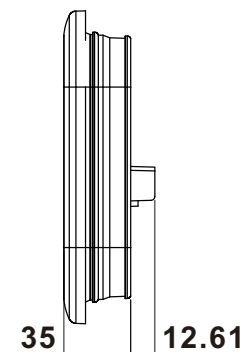



10-452C2R

452 Lamp

DESCRIPTION

Low Current Consumption;
Rubber Ring Mounting\Horizontal or Vertical Mounting;
Housing: ABS/PC(white).

VOLTAGE MOUNT

12-24V

APPROVALS

Rubber Ring Mounting\Horizontal or Vertical Mounting

LENS COLOR

ECE:R7/DOT/ADR

WARRANTY

Clear or Red

WATERPROOF

3 years

OPERATING TEMPERATURE

IP 67

CABLE LENGTH

-40°C to +65°C

PACKAGING

0.2m

Net Weight:0.23KG Innerbox:166*119*520mm

Outer Packing Carton: 620 *348 *290mm Packing Qty:50PCS/CTN



CDP-017

PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
10-452C2R		ST/T	ECE R7 DOT/ADR	13PCS 0.2W SMD RED LED	ST:3W TAIL:0.4W
11-452C2A		REAR DI	ECE R6 DOT/ADR	13PCS 0.2W SMD AMBER LED	3W
12-452C2W		REVERSE	ECE R23 DOT/ADR	13PCS 0.2W SMD WHITE LED	3W



11-452C2A-REAR DI




12-452C2W-REVERSE



10-452C2R-ST/T



11-452C2A-REAR DI



12-452C2W-REVERSE



10-452C2R-ST/T

