



FRP-002
Diffused Rubber Stalk Lamp

Specification


- Voltage: 10-30V
- Function: Front Position/Rear Position
- Housing: ABS
- Lens: PC
- Approval: ECE R7/ R10
- Warranty: 3Years
- Mounting: Screw
- IP grade: IP67
- Sealing: Ultrasonic Welding
- Temperature: -40°C to +65°C
- Connection: 350mm Wire
- Weight: 180g (60°) 130g (90°) 130g (180°)
- Package: Inner box: 60° 155*80*175mm
90° 155*80*175mm
180° 90*80*90mm
Outer box: 60° 425*325*370mm
90° 425*325*370mm
180° 475*425*200mm
Qty: 60° & 90° 20PCS/Carton
180° 50PCS/Carton

Picture



Function	Peak Power	LED Quantity	Approvals
Diffused Front Position	1.4W	6PCS	ECE R7/ R10
Diffused Rear Position	2.7W	6PCS	ECE R7 / R10

Size(mm)

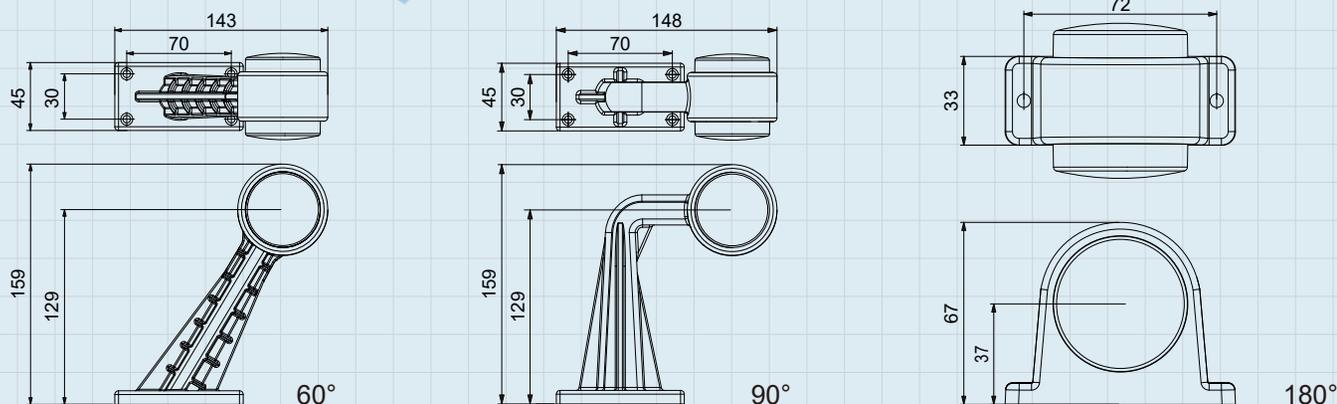

SIGNAL LAMP

Fordalite