




**DI-003C2A**


**DI-003**

<b>Voltage</b>	10-30V
<b>Function</b>	DI
<b>Power</b>	DI:2.2W
<b>Mount</b>	2*M6
<b>Connection</b>	Wire,L=250MM,with PVC tube
<b>Approve</b>	none
<b>Sealing</b>	Ultrasoundic welding
<b>IP Grade</b>	IP67
<b>Lens</b>	PC
<b>Housing</b>	PC
<b>Packing</b>	nner box: 100*80*100mm Outer Carton: 435*435*225mm Qty/Carton: 20PCS



**Size**

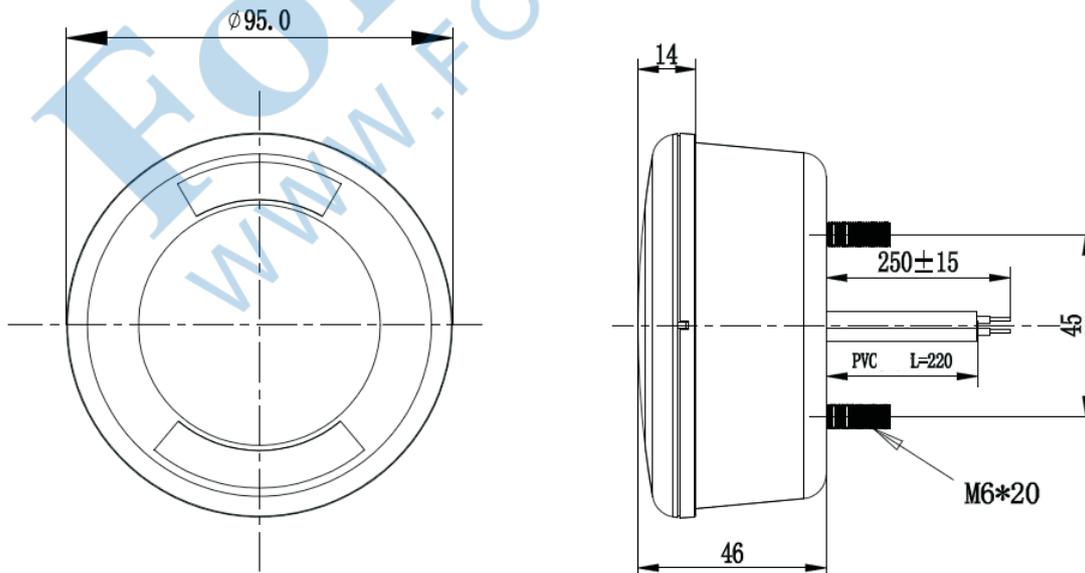




**DPI-003C2AW**

**DPI-003 daytime running and position lamp**

<b>Voltage</b>	10-30V
<b>Function</b>	daytime running and front position, front DI
<b>Power</b>	daytime running :3.5W,Front position:0.25W Front DI:2.3W
<b>Mount method</b>	2*M5
<b>Connector</b>	cable length 0.25M
<b>Approve</b>	ECE:daytime running:R87,Front position:R7 front DI:R6;EMC:R10
<b>Seal method</b>	Ultrasonic welding
<b>Waterproof grade</b>	IP67
<b>Lens material</b>	PC,clear with amber insert
<b>Housing material</b>	PC,black
<b>Packing</b>	Inner box:100*70*100mm Master carton:515*365*420mm Qty/carton:100pcs




**Size**

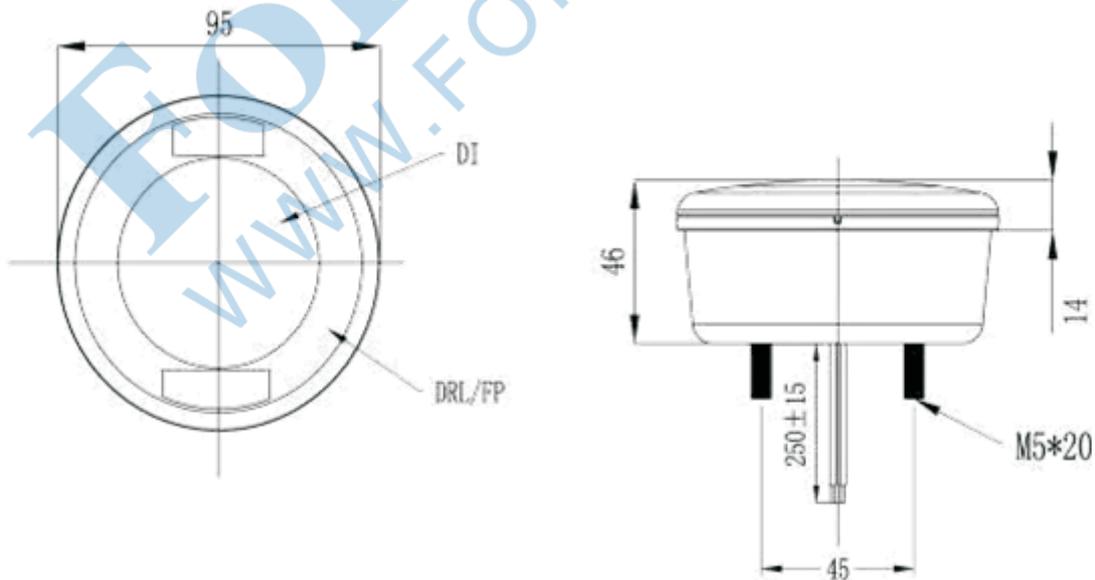



**Fordalite**  
Guangzhou Forda Signal Co., Ltd

EFFICIENT SOLUTIONS FOR A BRIGHTER FUTURE




**REV-003C2W**

**REV-003 Reverse Lamp**

<b>Voltage</b>	12/24V
<b>Function</b>	Reverse
<b>Power</b>	1.5W
<b>Mount</b>	Bolt
<b>CONNECTION</b>	Wire ,L=250MM,PVC tube
<b>Approval</b>	ECE : R23,EMC: R10
<b>Sealing</b>	Ultrasonic Welding
<b>IP Grade</b>	IP67
<b>Lens</b>	PC
<b>Housing</b>	PC
<b>Packing</b>	Inner box : 100*80*100mm Outer box : 435*435*225mm Carton : 20PCS



**Size**

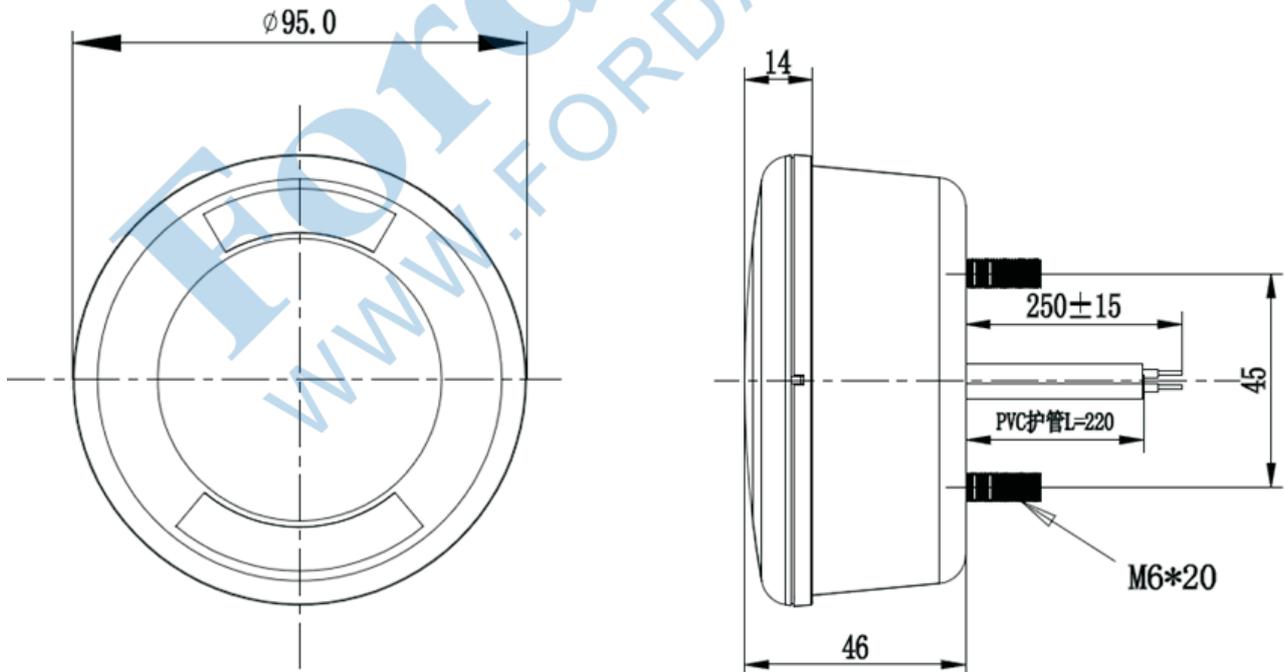




**REVF-003C2RW**


**REVF-003 Rear Fog & Reverse Lamp**

<b>Voltage</b>	12/24V
<b>Function</b>	Reverse , Rear Fog
<b>Power</b>	Rear Fog : 4W Reverse : 2W
<b>Mount</b>	Bolt
<b>CONNECTION</b>	Wire ,L=250MM,PVC tube
<b>Approval</b>	ECE : R23、R38,EMC: R10
<b>Sealing</b>	Ultrasonic Welding
<b>IP Grade</b>	IP67
<b>Lens</b>	PC
<b>Housing</b>	PC
<b>Packing</b>	Inner box : 100*80*100mm Outer box : 435*435*225mm Carton : 20PCS



**Size**

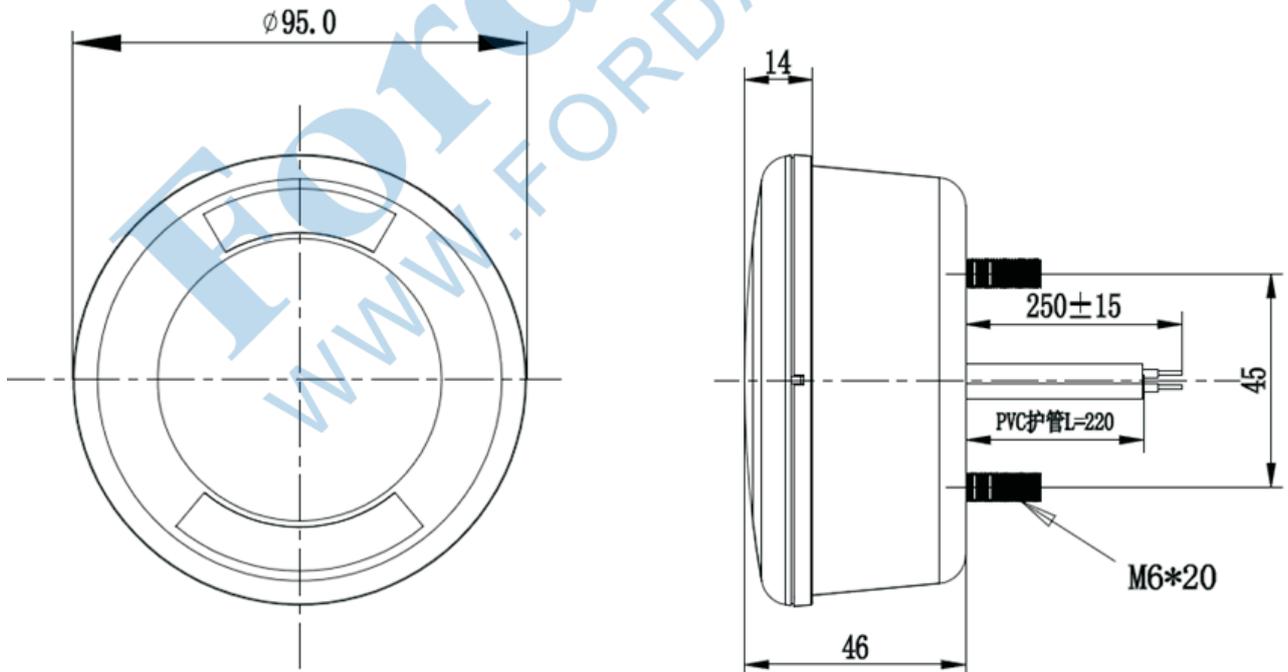




**STT-003C2R**


**STT-003**

<b>Voltage</b>	10-30V
<b>Function</b>	ST/T
<b>Power</b>	Stop: 0.5W Tail:2.6W
<b>Mount</b>	2*M6
<b>Connection</b>	Wire,L=250MM,with PVC tube
<b>Approve</b>	NONE
<b>Sealing</b>	Ultrasound
<b>IP Grade</b>	IP67
<b>Lens</b>	PC
<b>Housing</b>	PC
<b>Packing</b>	Inner box:100*80*100mm Outer box:435*435*225mm Qty/Carton:20PCS



**Size**

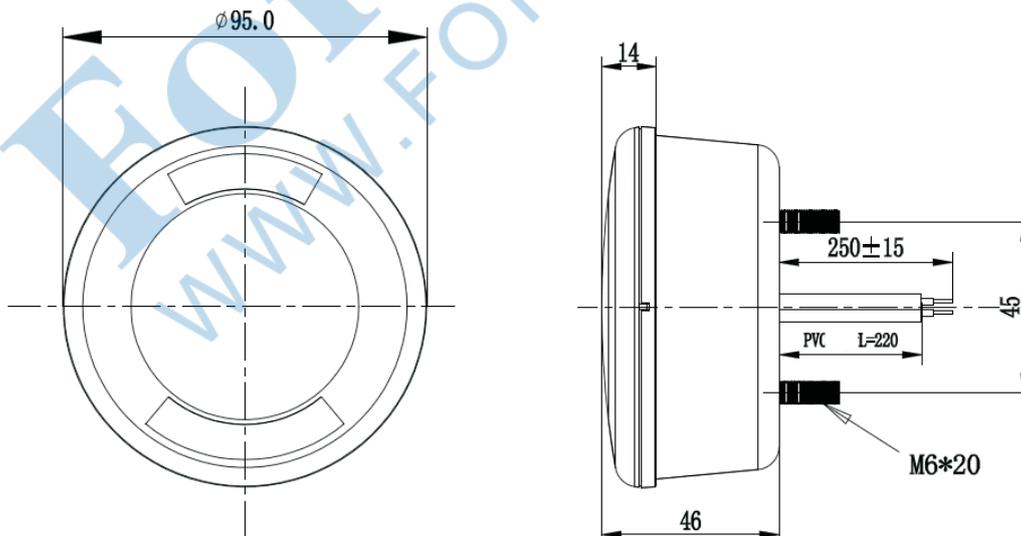



**STTD-003C2AR**

**STTD-003**

<b>Voltage</b>	10-30V
<b>Function</b>	Tail, Stop, Direction indicator
<b>Power/LM</b>	T: 0.4W ST: 2.5W DI: 2.5W
<b>Mount</b>	2*M6
<b>Connection</b>	wire; 250MM
<b>Approve</b>	NONE
<b>Sealing</b>	Ultrasonic welding
<b>IP Grade</b>	IP67
<b>Lens</b>	PC
<b>Housing</b>	PC
<b>Packing</b>	Inner box: 100*80*100mm Outer box: 435*435*225mm Qty/Carton: 20PCS



**Size**

