

WA-009C2

WA-009 LED Beacon

DESCRIPTION

Low Current Consumption
PC Lens with Smooth Exterior Will Not Gather Dirt and Dust
Uniform 360 Degree Light Distribution---No Dark Spots
Magnetic Mount Use Up to 50mph/80kph
Base material: ADC12, Black powder coated

VOLTAGE

10-30V

POWER CONSUMPTION

30W

MOUNT

Flange/ Magnetic mounting/ Surface mounting /Single bolt

APPROVALS

ECE R65(Amber)/ R10(EMC)

LENS COLOR

Clear or Color

WARRANTY

3 Years

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40° C to +65° C




PACKAGING

Net Weight: KG Innerbox: mm
Outer Packing Carton: mm Packing Qty: PCS/CTN



PART NUMBER	COLOR	MOUNT	APPROVALS	LEDs	OUTER LENS COLOR
WA-009C2A		Flange/ Magnetic mounting/ Surface mounting /Single bolt	ECE R65 ECE R10(EMC)	10 PCS 3W SMD Amber	Clear or Color
WA-009C2B			ECE R10(EMC)	10 PCS 3W SMD Blue	
WA-009C2R			ECE R10(EMC)	10 PCS 3W SMD Red	
WA-009C2W			ECE R10(EMC)	10 PCS 3W SMD White	

FLASH PATTERNS	
Flash patterns	FPM (Flashes per minute)
Single	150
Double	75
Triple	80
Quad	85
Rotate	428
Combine	

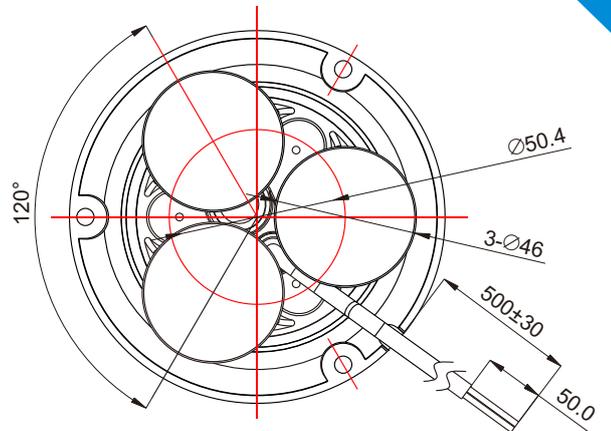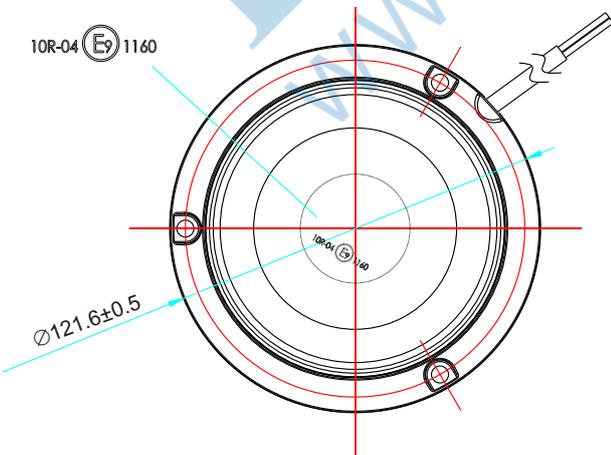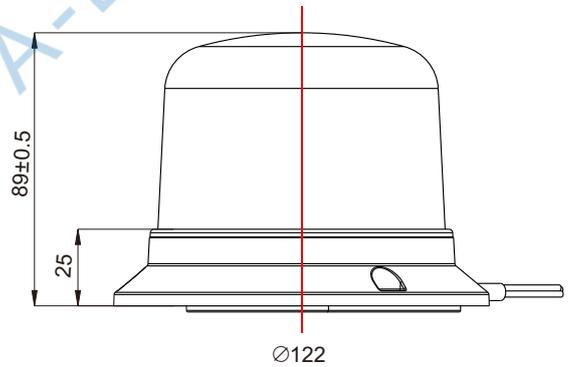

LED BEACON

