



WK-079C3W

FEATURES



- Easy installation
- With a portable handle, it is easy to adjust the illuminate angle, easy to carry and operate, and to prevent the housing from high temperature burns
- With a switch, it is convenient for customers to turn on and off the product at any time, no need for operation in the car
- Advanced thermal design, long product lifetime
- Cost effective and competitive



SPOT





FLOOD

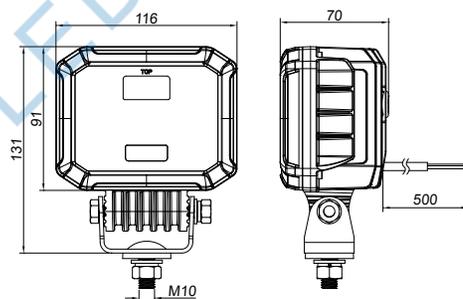

SPOT



FLOOD

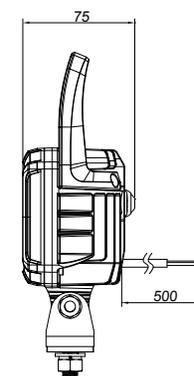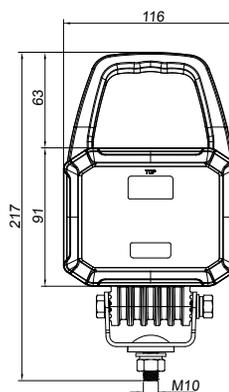

WK-079C3W



DT





CABLE



DT



CABLE

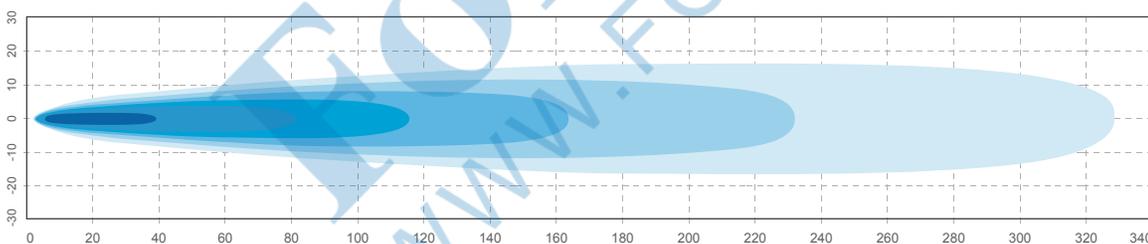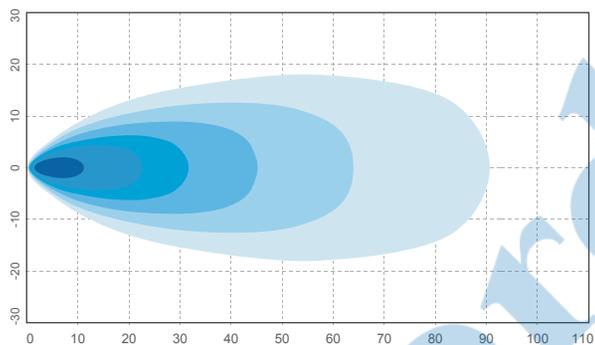

Part NO	Flood	SPOT	With Handle	Without Handle	With Switch	Without Switch	DT	500mm Cable	Lumen	Power	Voltage	Material	Mounting	Sealing
WK-079C3W-DT-SW-Flood	●		●		●		●		Raw: 5200LM Effective: 4100LM	9*5W	DC 10-30V	Lens: PC Housing: AL	Bracket	Potting
WK-079C3W-CA-SW-Flood	●		●		●		●							
WK-079C3W-DT-Flood	●			●		●								
WK-079C3W-CA-Flood	●			●		●								
WK-079C3W-DT-SW-Spot		●	●		●		●	Raw: 5200LM Effective: 4000LM	9*5W	DC 10-30V	Lens: PC Housing: AL	Bracket	Potting	
WK-079C3W-CA-SW-Spot		●	●		●		●							
WK-079C3W-DT-Spot		●		●		●								
WK-079C3W-CA-Spot		●		●		●								

Working Lamp / Head Lamp