





## WKA-001

### FEATURES

- Integrates working and warning functions, budget-friendly&easy installation
- Advanced thermal design reduce the temperature on LED's for keeping product lifetime
- Low power, high intensity





Tilt 30° to meet Reverse regulation

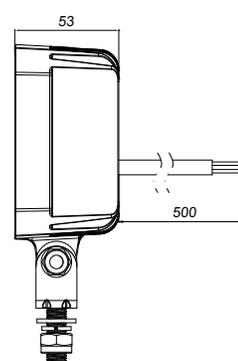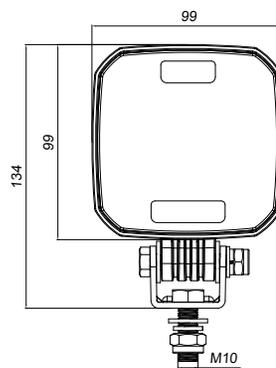

Function	Power	Raw Luminous	Voltage	Material	Mounting	Connection	Sealing	Temperature
Working light	6*3W	1500LM	DC 12/24V	Lens:PC Housing:ADC 12	Bracket	500mm Cable	Potting	-40°C to +65°C
Warning light	11W	-						



## WKA-001

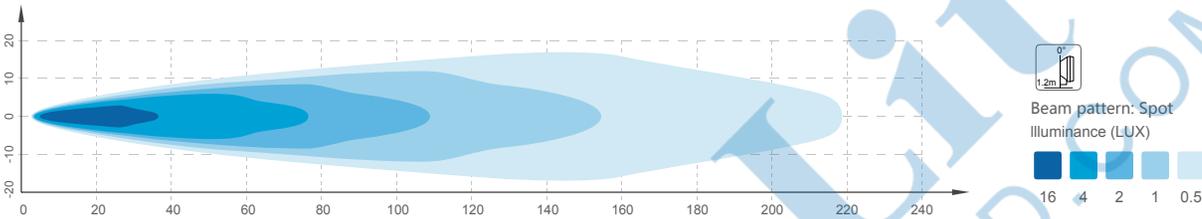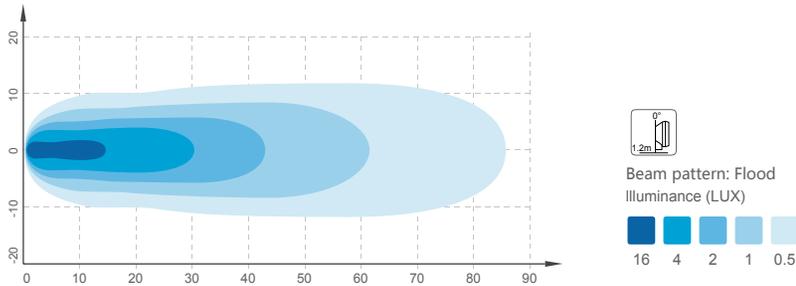

Warning Function Flash Mode

1	Single flash (cycle : 480ms) Class 2	2	Single flash (cycle : 480ms) Class 1
3	Double flash (cycle : 690ms)	4	Triple flash (cycle : 790ms)
5	Quadruple flash (cycle : 810ms)	6	Quintuple flash (cycle : 890ms)
7	Single flash+Double flash (cycle : 2040ms)	8	Single flash+Triple flash (cycle : 2200ms)
9	Single flash+Quadruple flash (cycle : 2360ms)	10	Double flash+Triple flash (cycle : 3200ms)
11	Strobe flash (cycle : 40ms)		