



WK- 30C3W

FEATURES



- Easy installation
- Classic designs to adapt different vehicles in need of extra lighting




WK-30C3W-P8/ HL




WK-30C3W-S8-II

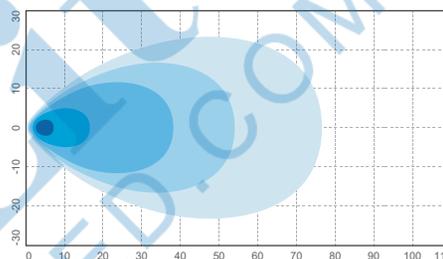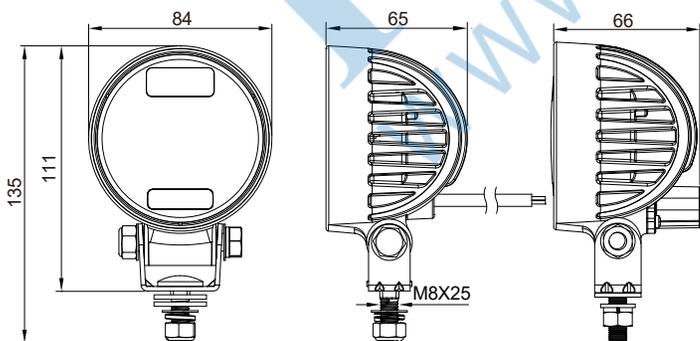

WK-30C3W-S8-II Beam pattern: Flood
Illuminance (LUX) 40 10 2 1 0.5

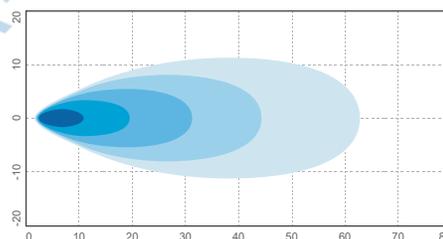

WK-30C3W-OS Beam pattern: Flood
Illuminance (LUX) 30 10 4 2 1

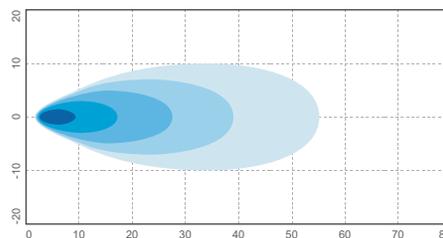

WK-30C3W-HL Beam pattern: Flood
Illuminance (LUX) 30 10 4 2 1

Part NO.	Power	Lumen (±10%)	Voltage	Material	Connection	Mounting
WK-30C3W-S8-II	4 * 5W	Raw: 2000 LM Effective: 1500 LM	DC 12/24V	Lens: PC Housing: ADC12	Cable/ DT connector	Bracket
WK-30C3W-P8	4 * 5W	Raw: 1800 LM Effective: 1250 LM				
WK-30C3W-HL	4 * 3W	Raw: 1000 LM Effective: 440 LM				