


HDL-004C3W-LSW

HDL-004 Head Lamp

| | |
|---------------------|---|
| Voltage | 12V/24V |
| Function | Headlamp |
| Power | Low beam:20W;High beam:40W; Front position:3.5W |
| Installation | Bracket mount |
| Cable | Cable,L=250mm |
| Approval | ECE R112、 R7;EMC R10 |
| Sealing | Silicon seal |
| Waterproof | IP67 |
| Lens | PC,UV-COATING |
| Housing | ADC12, Black |
| Packing | Inner Box:182*182*115mm Carton:385*385*251mm QTY/CTN:8PCS |




Size

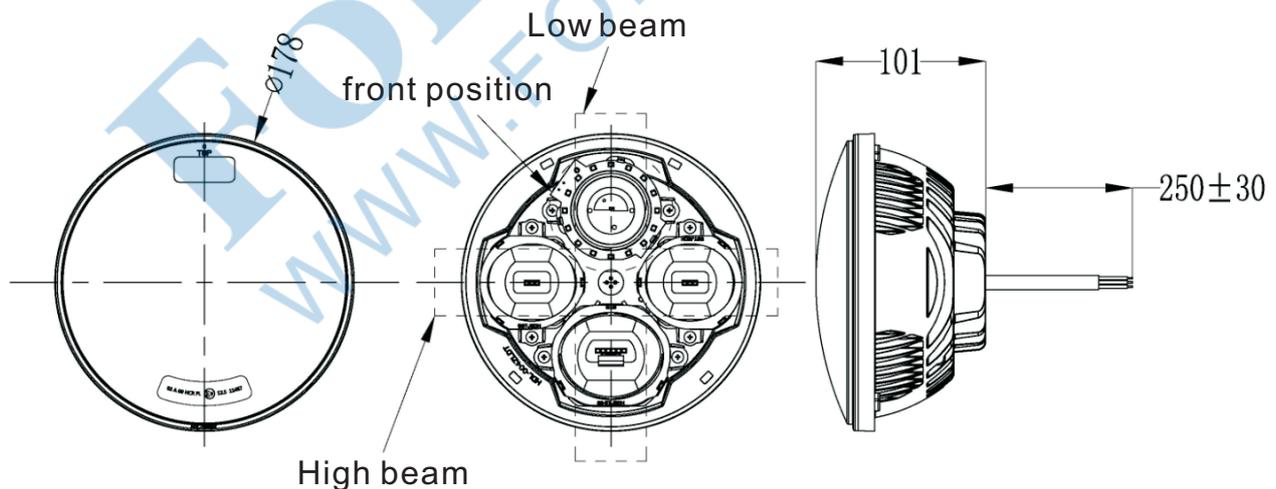





Intensity Distribution

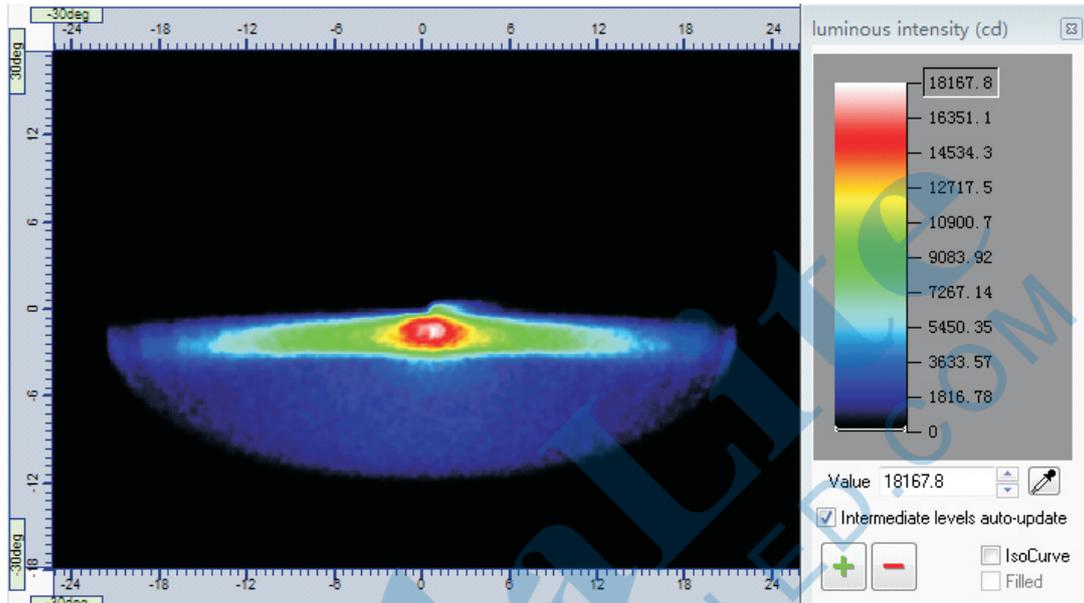

Low Beam

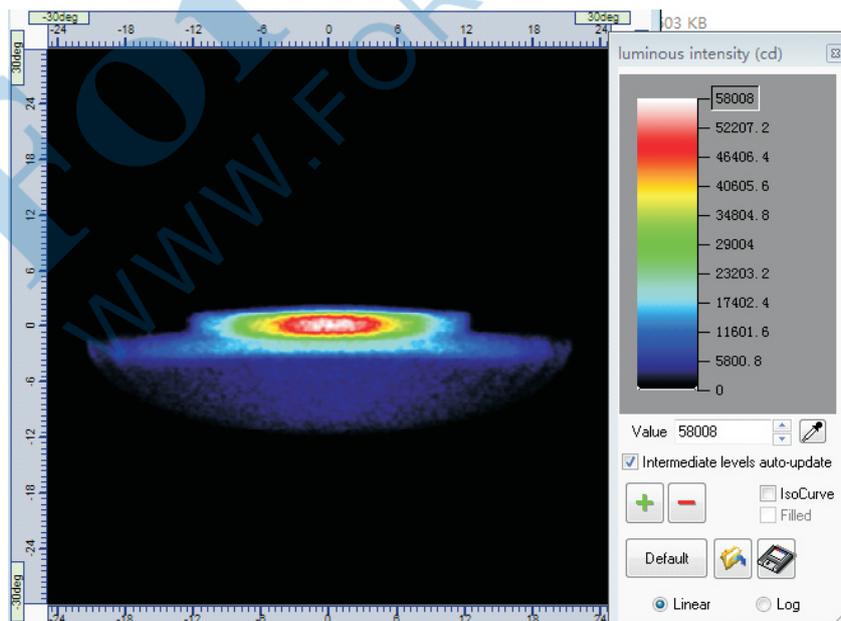

High Beam




HDL-004C3W-RSW

HDL-004 Head Lamp

| | |
|---------------------|---|
| Voltage | 12V/24V |
| Function | Headlamp |
| Power | Low beam:20W;High beam:40W; Front position:3.5W |
| Installation | Bracket mount |
| Cable | Cable,L=250mm |
| Approval | ECE R112、 R7;EMC R10 |
| Sealing | Silicon seal |
| Waterproof | IP67 |
| Lens | PC,UV-COATING |
| Housing | ADC12, Black |
| Packing | Inner Box:182*182*115mm Carton:385*385*251mm QTY/CTN:8PCS |




Size

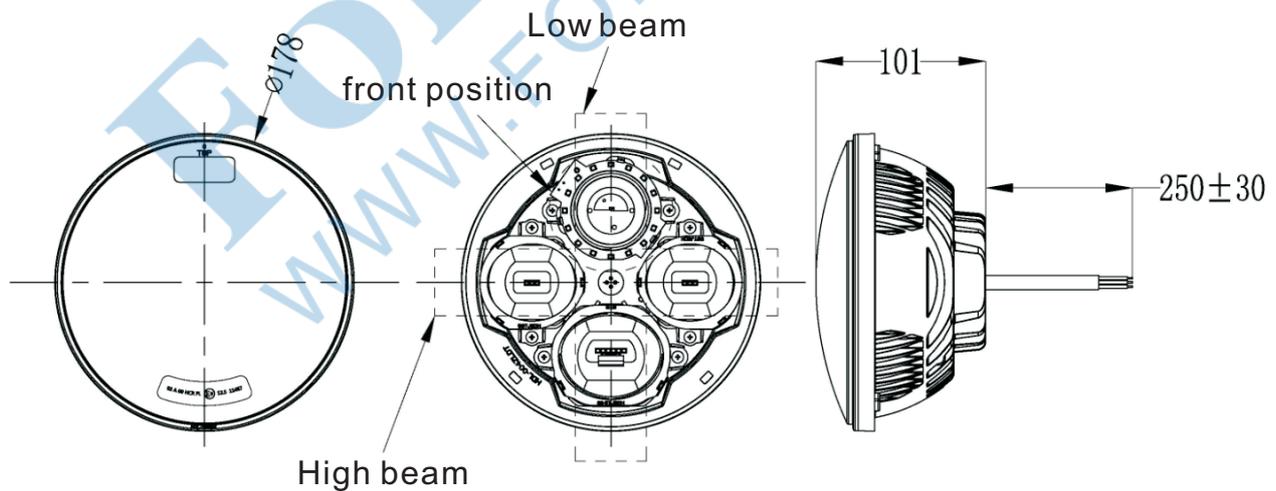




Intensity Distribution

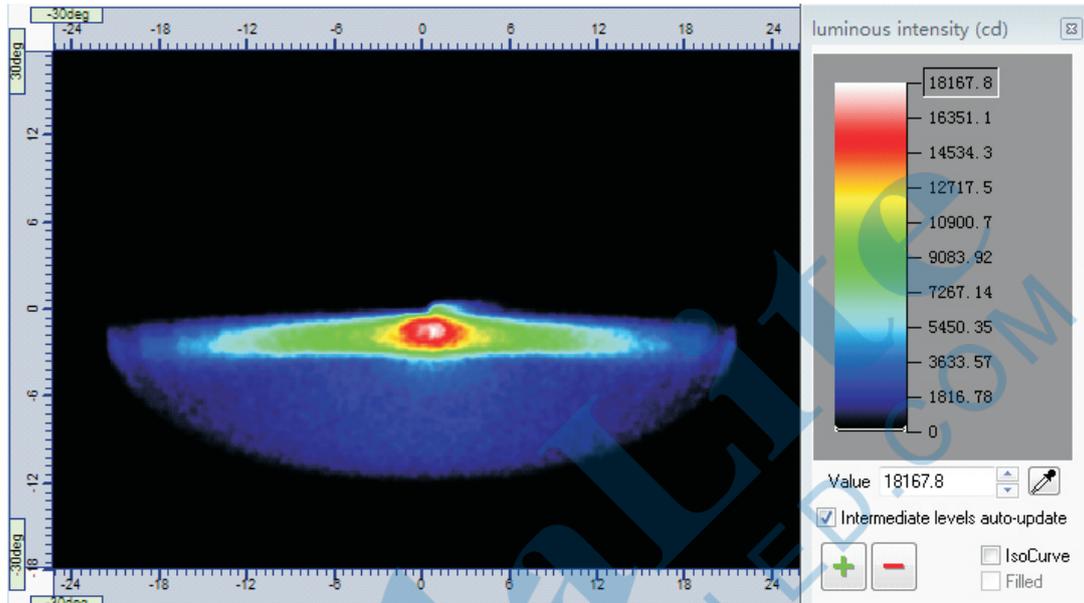

Low Beam

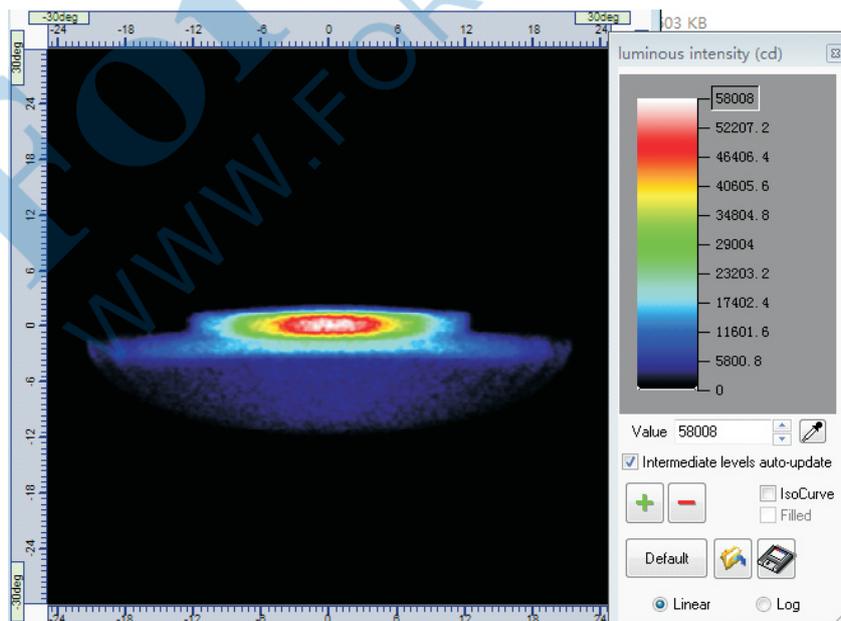

High Beam