



34-704C3W

7"Head Lamps

DESCRIPTION Low Current Consumption;
Connecting format: The basic leakage cable, length is 300 mm
Rugged solid state LEDs can Withstand shock
Lens material: PC, UV curing

VOLTAGE 12V/24V

POWER CONSUMPTION High Beam: 25W; Low Beam: 28W; Front Position: 1.5W

MOUNT Recess mount

APPROVALS ECE R112/R7/R10(EMC)


LENS COLOUR Clear

WARRANTY 3 years

WATERPROOF IP 67



OPERATING TEMPERATURE -40°C to +65°C

PACKAGING Net Weight: 1.25KG Innerbox: 182*182*115mm
Outer Packing Carton: 385*385*251mm Packing Qty: 8PCS/CTN



PART NUMBER	FUNCTION	APPROVALS	LEDs	POWER
RHT34-704C3W/ LHT34-704C3W	High Beam	ECE R112/R7/ R10(EMC)	8 PCS SMD White LED	25W
	Low Beam		10 PCS SMD White LED	28W
	Front Position		12 PCS SMD White LED	1.5W

Signal Wire:

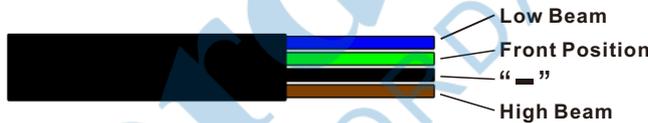

HEAD LAMP

RHT34-704C3W (Driver in left seat)

LHT34-704C3W (Driver in right seat)

