


HDL-001C3W-LSW

HDL-001 head lamp

Voltage	12V/24V
Function	LED head lamp
Power	Low beam:23W;High beam:40W; Front position:3.5W
Mounting	Bracket mount
connecting	low/high beam with connector, front position with separate wire
Approval	ECE R112、 R7;EMC R10
Sealing	Silicon potting
Waterproof	IP67
Lens	PC,UV coating
Housing	ADC12 ,black powder




Size

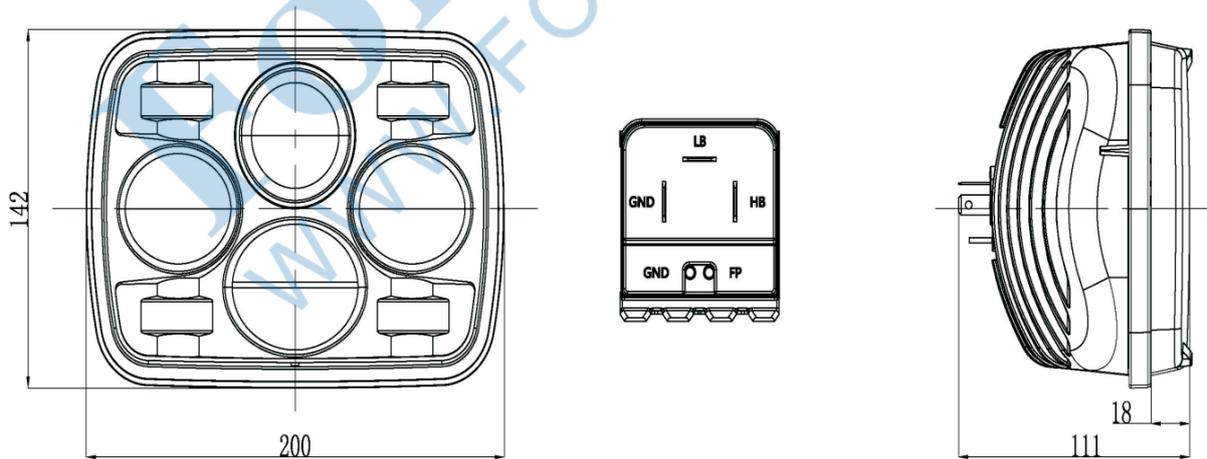




Intensity Distribution

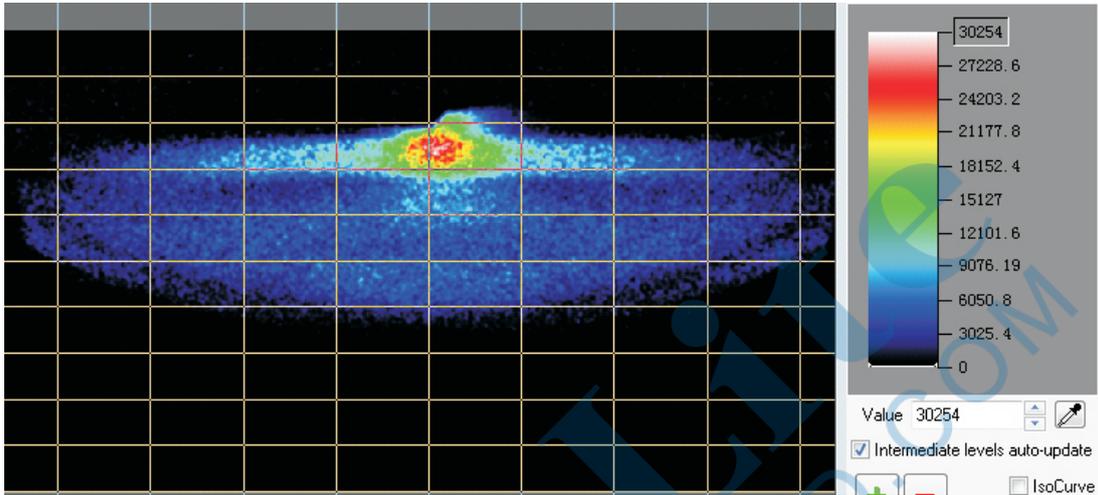

Low Beam

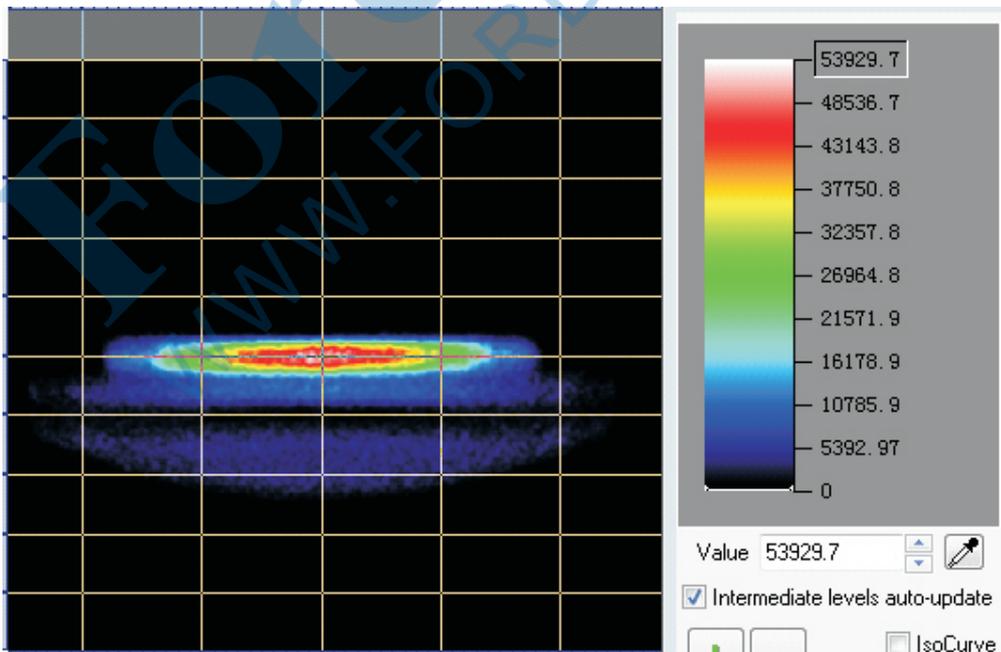

High Beam




HDL-001C3W-RSW

HDL-001 head lamp

Voltage	12V/24V
Function	LED head lamp
Power	Low beam:23W;High beam:40W; Front position:3.5W
Mounting	Bracket mount
connecting	low/high beam with connector, front position with separate wire
Approval	ECE R112、R7;EMC R10
Sealing	Silicon potting
Waterproof	IP67
Lens	PC,UV coating
Housing	ADC12,black powder




Size

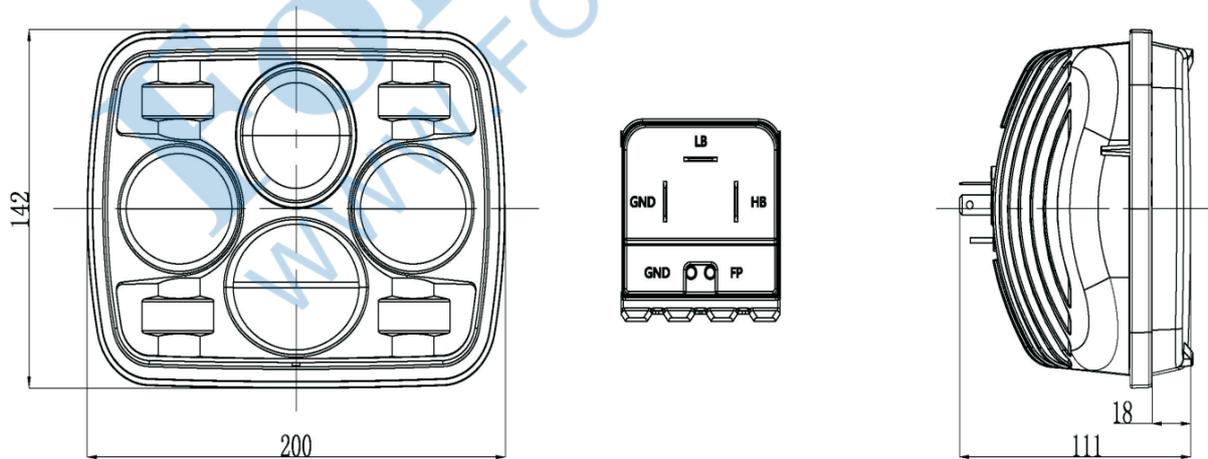




Intensity Distribution

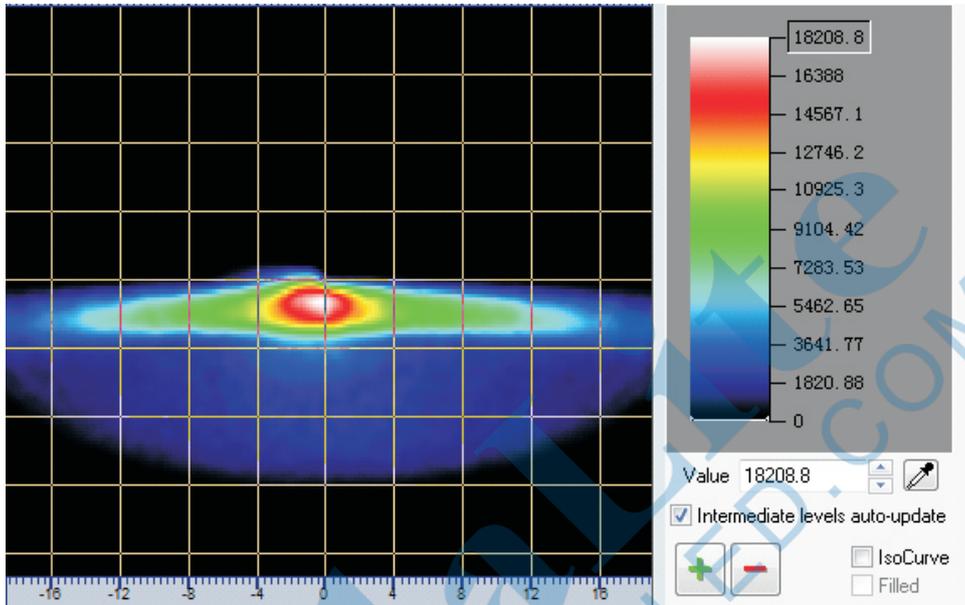

Low Beam

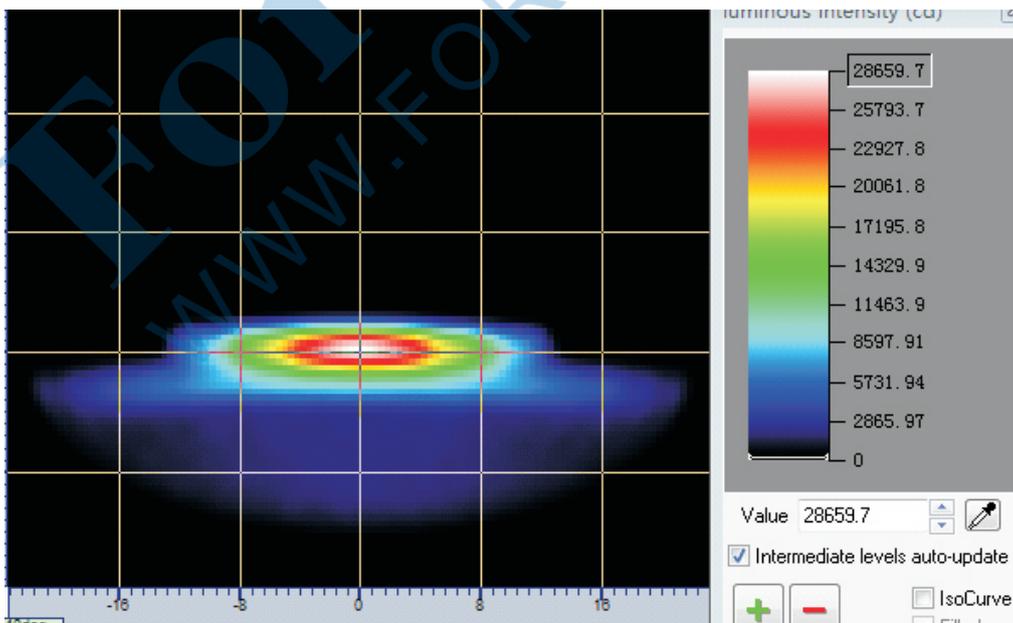

High Beam