

HDL-011


Picture



Specification

- Voltage:** 12/24V
- Function:** High Beam/Low Beam/
Day Running Lamp/Front Position
- Housing:** AL Diecast
- Lens:** PC
- Inner lens:** PC
- Approval:** ECE : R112/R87/R7 EMC:R10
- Power:** 16W / 16W / 5.5W / 0.6W
- Warranty:** 3 years
- Mounting:** PAR 46 mounting
- IP Grade:** IP67
- Sealing:** Potting
- Operating Temperature:** -40°C to +65°C
- Connection:** 500mm cable
- Weight:** 0.87Kg
- Packing:** Inner box: 148*148*100mm
Outer box: 613*312*222mm
Qty: 16 PCS/ Carton

Size(mm)

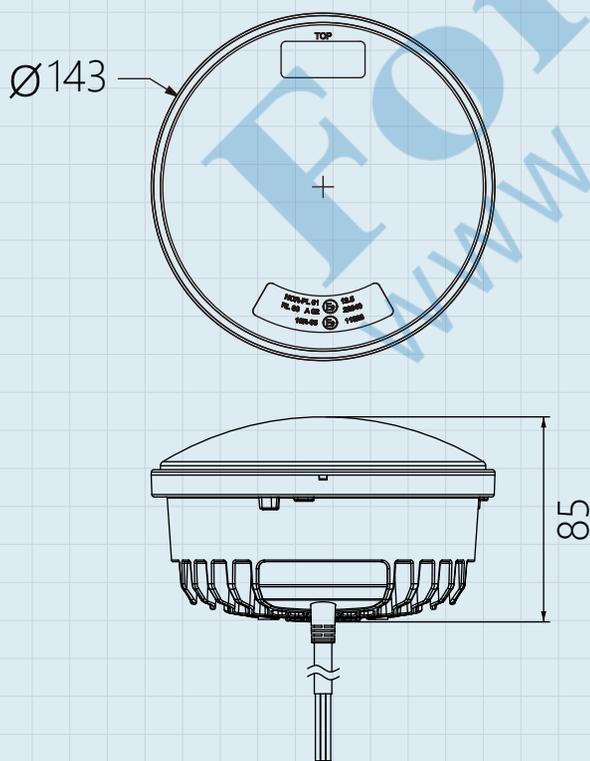

Function	Peak power	LED quantity
High Beam	16 W	4pcs LED
Low Beam	16 W	5pcs LED
Day Running Lamp	5.5 W	36pcs LED
Front Position	0.6 W	36pcs LED