




7" HDL-019 Head lamp




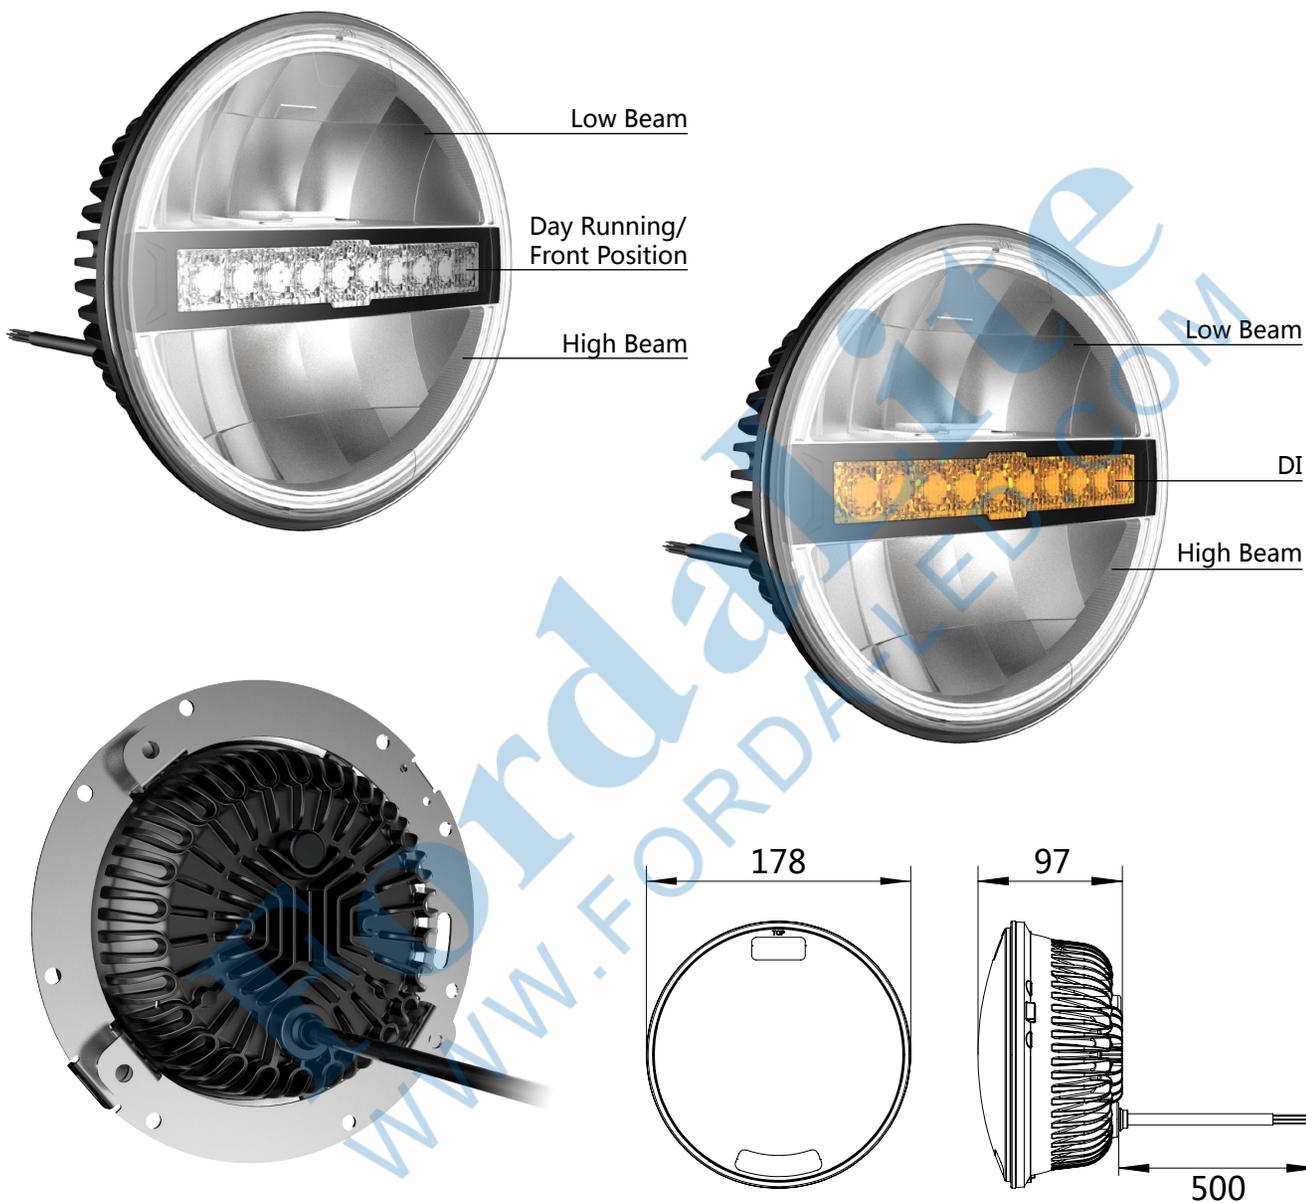


Function	Luminous Flux	Power	LED	Voltage	Material	Mounting	Connection	Sealing	Temperature
Low Beam	1050LM	16W	1pcs	12/24V	Housing: Aluminium Die Cast Lens: PC(UV Coating)	Harley Bracket (PAR 56)	500mm Cable / 500mm Cable With H4 Connector	Potting	-40°C to +65°C
High Beam	1050LM	16W	1pcs						
Front Position	30LM	0.7W	10pcs						
Day Running Lamp	500LM	4W	10pcs						
FDI	400LM	5.9W(ECE)	10pcs						
	700LM	9W(SAE)							

Project phase : Concept Development Pre-production



HDL-019 Head lamp

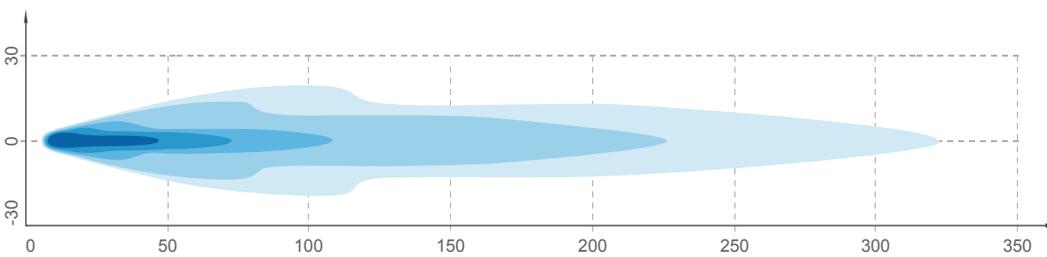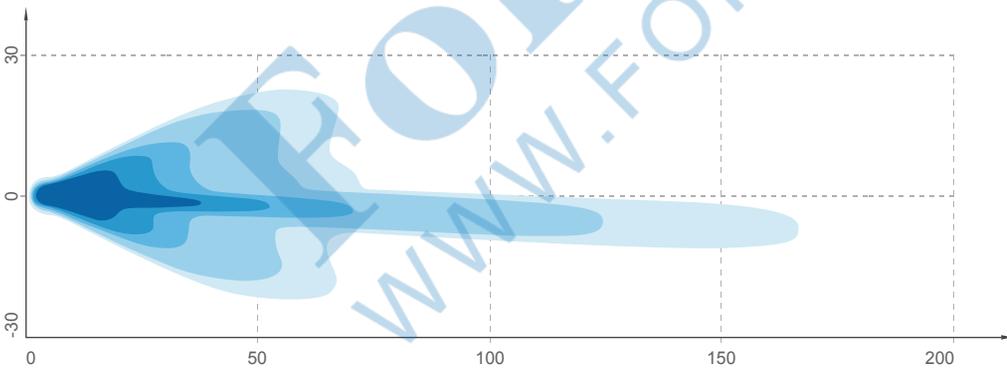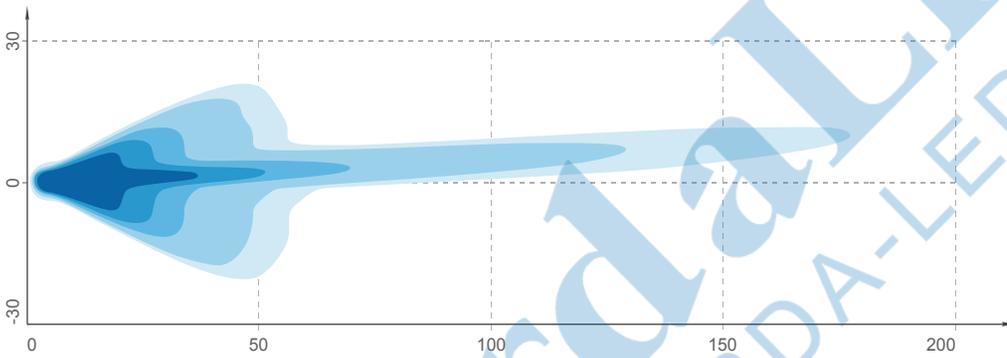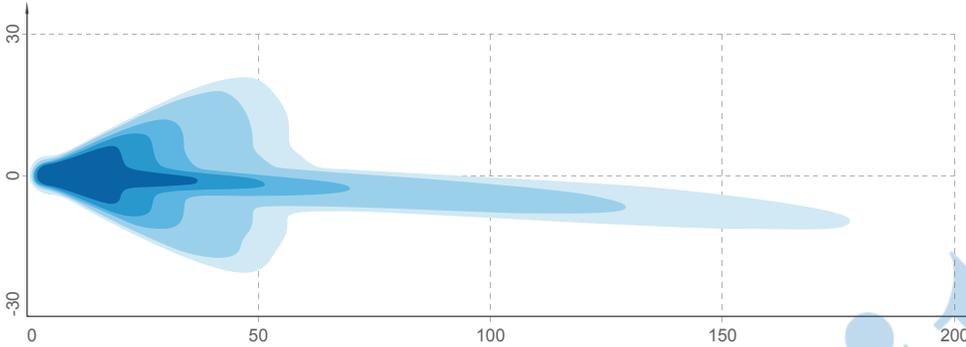

HEAD LAMP

Project phase : Concept Development Pre-production