






HBDR-002C3W



High Beam

Front Position &
Day Running Lamp

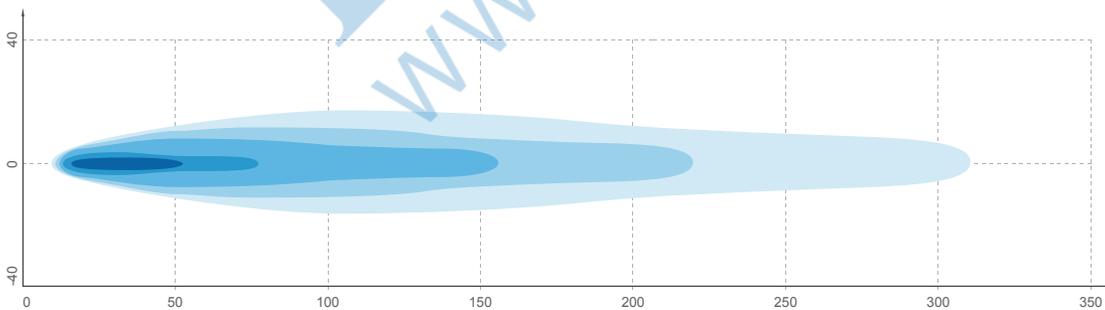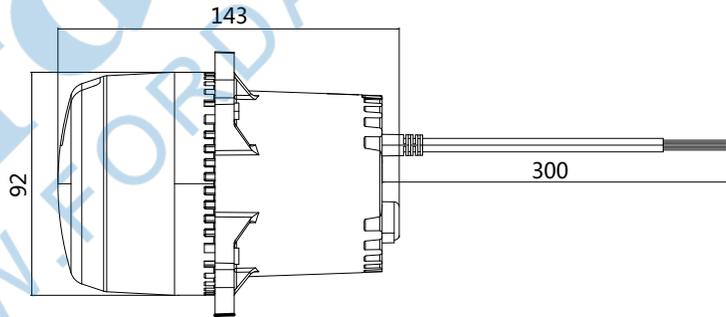

Beam pattern: HB

Illuminance (LUX)



| Part Number | Function | Voltage | Power | Luminous Flux | Material | Mounting | Connection | Sealing | Temperature |
|-------------|------------------|---------|-------|---------------|---------------------------|----------|-------------|-------------------|----------------|
| HBDR-002C3W | High Beam | 12-24V | 1*15W | 1100LM | Housing: ADC12 Lens:PC | Bolt | 300mm cable | O-ring sealing | -40°C to +65°C |
| | Day Running Lamp | | 5.2W | 550LM | | | | | |
| | Front Position | | 1.1W | 80LM | | | | | |

Working Lamp / Head Lamp