
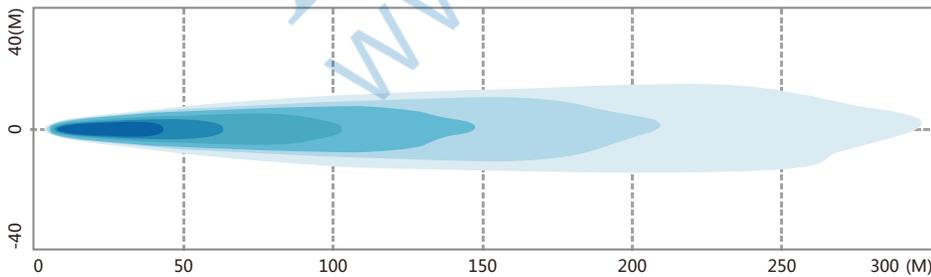


# HDL-021C3AW Head lamp

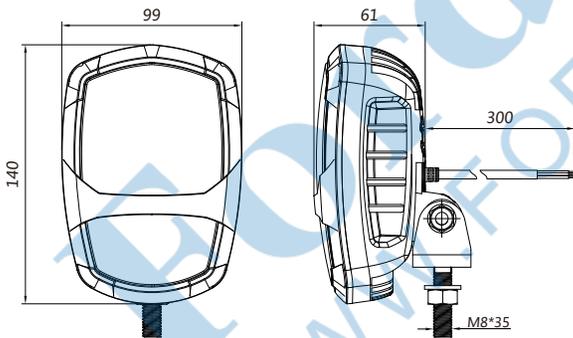

HB  
Beam pattern: High beam

Illuminance (LUX)  
20 10 5 2 1 0.5

Function	Power	Luminous Flux	LED	Voltage	Material	Mounting	Connection	Sealing	Temperature
High Beam	12W	800LM	4pcs	10-30V	Lens:PC Housing: ADC12	Bracket Mounting	4-core cable (300mm)	Potting	-40°C to +65°C
Direction Indicator	6W	180LM	2pcs						
Front Position	1W	30LM	2pcs						

Project phase :  Concept  Development  Pre-production