



Picture




HDL-006

Specification

- Voltage:** 10-48V
- Function:** Low Beam / Day Running Lamp / Front Position/Front Direction
- Housing:** ADC12 Aluminum alloy
- Lens:** PC
- Inner lens:** Glass
- Approval:** EMC R10.05
ECE R112 (LHT/RHT) R87 R6 R7
- Power:** Low Beam 14.5W Front Direction 3.5W
Day Running Lamp 8W Front Position 1W
- Warranty:** 3 Years
- Mounting:** Bolt Mounting
- IP grade:** IP67
- Sealing:** Potting
- Temperature:** -40°C to +65°C
- Connection:** 500 mm Cable
- Weight:** 1.43kg
- Package:** Inner box : 210*175*115mm
Outer box : 365*365*230mm
Qty : 6 PCS/ Carton

Function	Peak Power	LED Quantity	Approvals
Low Beam	14.5W	1PCS LED	ECE R112 EMC R10
Day Running Lamp	8W	32PCS LED	ECE R87 EMC R10
Front Direction	3.5W	12PCS LED	ECE R6 EMC R10
Front Position	1W	32PCS LED	ECE R7 EMC R10

Size(mm)

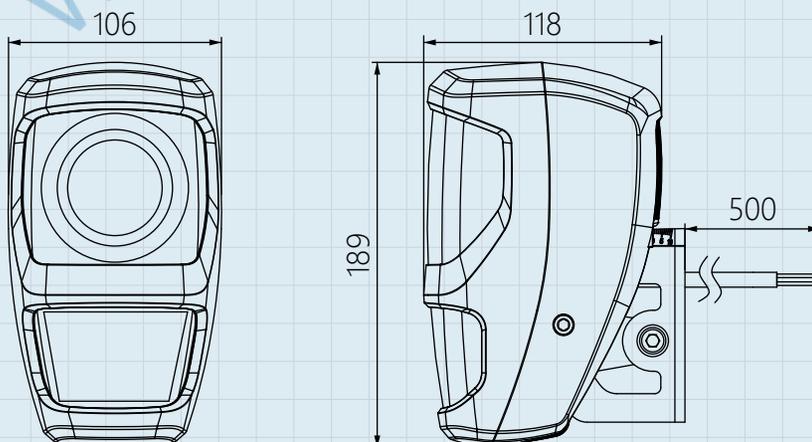

HEAD LAMP

Fordalite