






WK-083C3W-II & WK-084C3W-II

FEATURES




- Budget-friendly.
- Easy installation.
- High level of waterproof- IP67.
- Available in connector or cable connection.
- Low power and high intensity, provide higher brightness with the same power consumption.
- High level EMC design, avoid electromagnetic interference to electronic equipments of the vehicle.
- Advanced thermal design reduce the temperature on leds for keeping product lifetime and providing higher brightness.



WK-083C3W-II

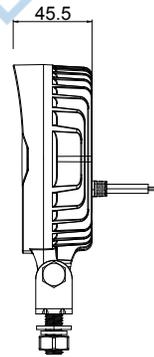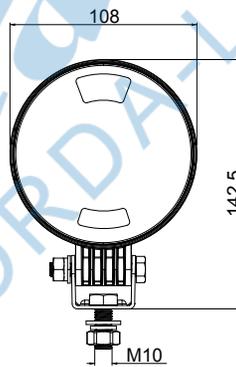


WK-084C3W-II

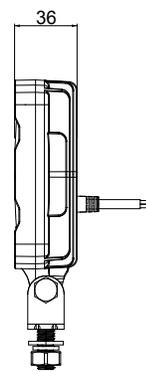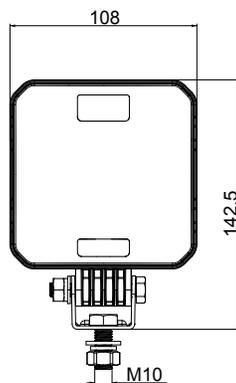





WK-083C3W-II & WK-084C3W-II

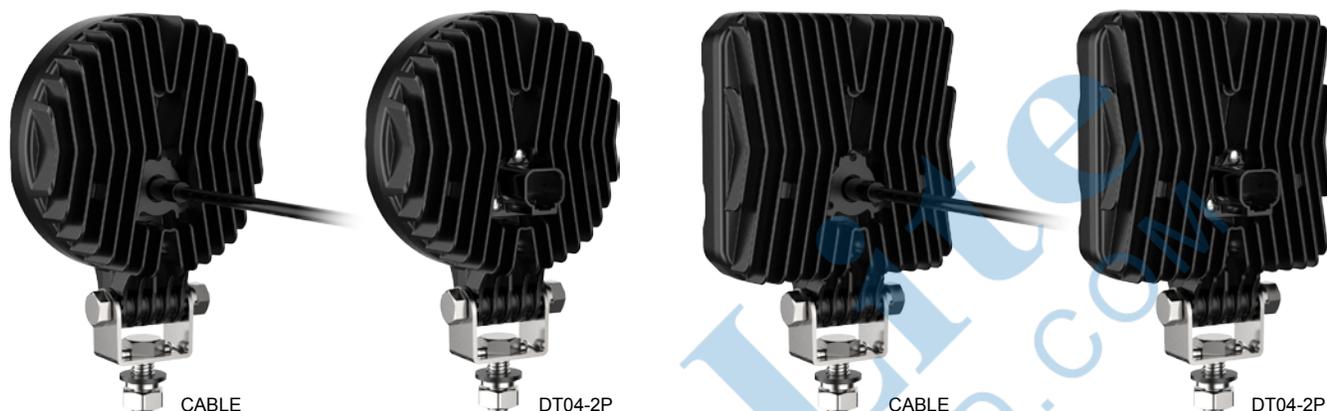

WK-083C3W-II-HL
WK-084C3W-II-HL

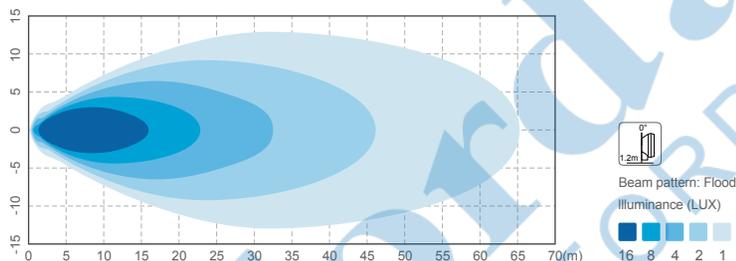

WK-083C3W-II-OS
WK-084C3W-II-OS

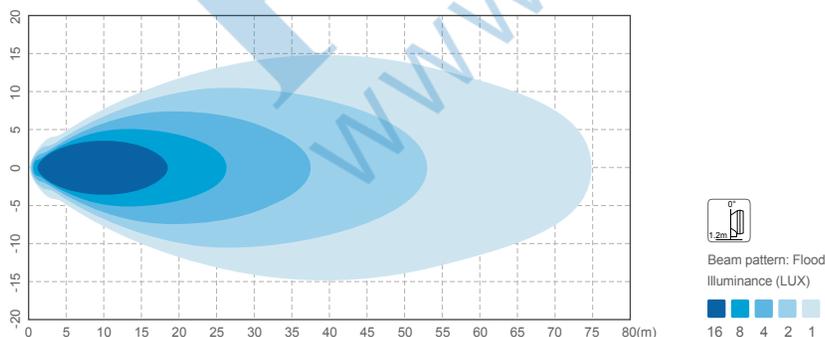

Part NO.	Voltage	Power	Lumen (±10%)	Material	Mounting	Connection
WK-083C3W-II-HL	DC 12/ 24 V	9 PCS*3 W	Raw: 2050 LM Effective: 1600 LM	Lens: PC Housing: AL ADC12	Bracket	300 mm Cable / DT connector
WK-083C3W-II-OS		9 PCS*5 W	Raw: 3450 LM Effective: 2800 LM			
WK-084C3W-II-HL		9 PCS*3 W	Raw: 2050 LM Effective: 1600 LM			
WK-084C3W-II-OS		9 PCS*5 W	Raw: 3450 LM Effective: 2800 LM			