




## WK117C3W

### FEATURES



- Optional for different connections such as cable, DT-conector.
- Easy mounting version for screw and bracket to meet the customers needs in different occasions.
- Excellent EMC R10 and CISPR 25 Class 3 circuit design to avoid the interference of electronic equipment.
- The high thermal conductivity alloy plastic housing and plastic bracket are very light and will not be corroded.



PLASTIC BRACKET VERSION




BACK MOUNTING VERSION  
(Screw:4-ST4)

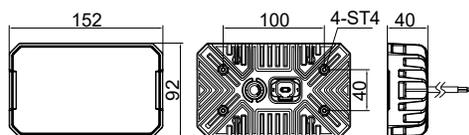

## WK117C3W

WK117C3W

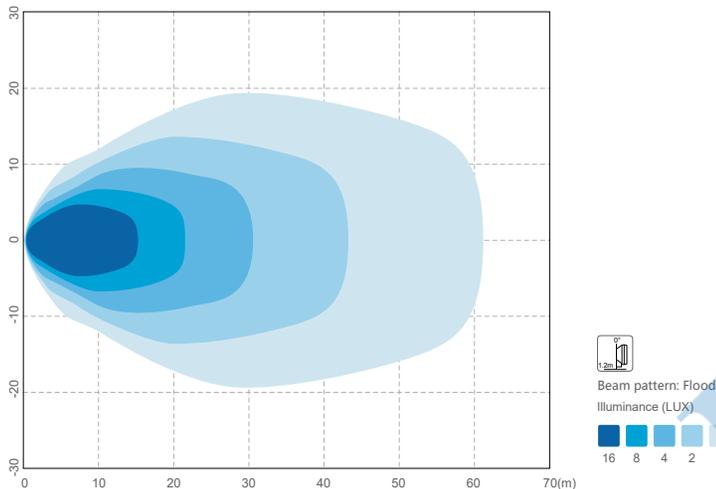

Part NO.	Voltage	Power	Lumen (±10%)	Material	Mounting	Connection	Approvals
WK117C3W-001	DC 10-30 V	8 PCS * 5 W	Raw: 4200 LM Effective: 3450 LM	Lens:PC Housing: High Thermal Conductivity Alloy Plastic	Plastic Bracket	DT04-2P	EMC R10
WK117C3W-002						500 mm Cable	
WK117C3W-003						DT04-2P	CISPR 25 Class 3 EMC R10
WK117C3W-004						500 mm Cable	
WK117C3W-005					Back Mount (Screw:4-ST4)	DT04-2P	EMC R10
WK117C3W-006						500 mm Cable	
WK117C3W-007						DT04-2P	CISPR 25 Class 3 EMC R10
WK117C3W-008						500 mm Cable	