



## WK120CW

### FEATURES


- The product meets EMC R10 requirements.
- Available in cable, DT-connector, to meet the customer needs in different occasions.
- High thermal conductivity alloy plastic housing, overall light weight, without corrosion risk.




WK120CW-001  
WK120CW-002




WK120CW-003  
WK120CW-004

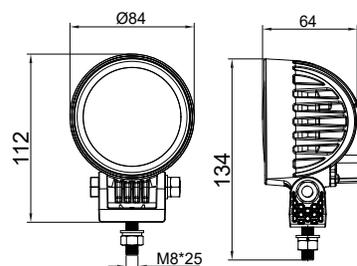

WK120CW-001  
WK120CW-002

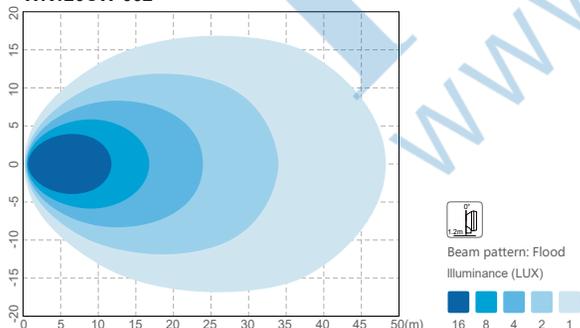

WK120CW-003  
WK120CW-004

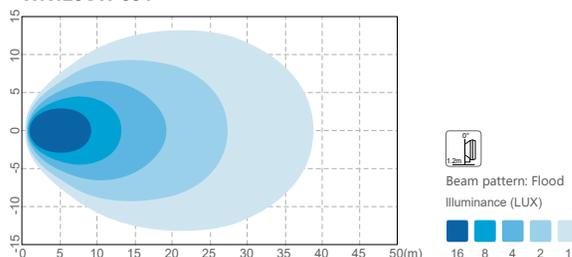

Part NO.	Voltage	Power	Lumen (±10%)	Material	Mounting	Approvals	Connection
WK120CW-001	DC 10-30 V	20 PCS * 1 W	Raw: 2500 LM Effective: 1750 LM	Lens:PC Housing: High Thermal Conductivity Alloy Plastic	Plastic Bracket	EMC R10	500 mm Cable/ DT04-2P
WK120CW-002							
WK120CW-003		12 PCS * 1 W	Raw: 1540 LM Effective: 1080 LM				
WK120CW-004							