



WA111

FEATURES



- The product meets EMC R10、CISPR 25 Class 3 requirements.
- Convenient installation options, such as magnet installation, DIN POLE installation, bolt installation, to meet the needs of customers in different occasions.
- High IP Protection class IP67, operating temperature -40°C to $+65^{\circ}\text{C}$, allow the lamp work in extreme weather.



WA111CA-001
(Magnet)



WA111CA-002
(Screw)

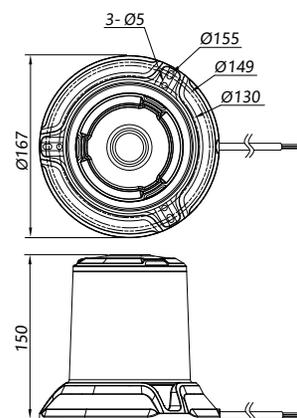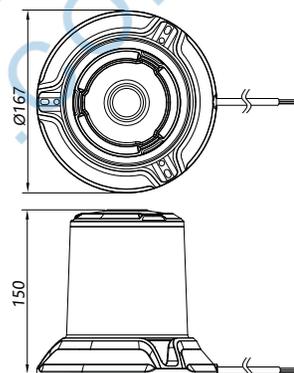


WA111



WA111CA-003
(W/ O Switch)



WA111CA-004
(With Switch)

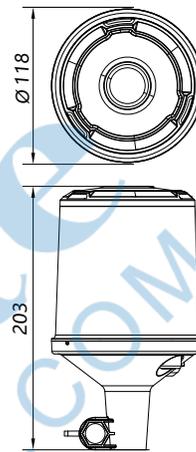

ECE Amber Flash Pattern	
# 1	Single Flash(ECE Byday): 480 ms
# 2	Single Flash(ECE Bynight): 480 ms
# 3	Single Flash: 800 ms
# 4	Double Flash: 480 ms
# 5	Triple Flash: 800 ms
# 6	Quad Flash: 480 ms
# 7	Rotation: 480 ms

Part NO.	Function	Voltage	Power	Material	Approvals	Mounting	Connection
WA111CA-001	Amber Warning Lamp	DC 10-30 V	46 W	Cover: PC Lens: PC Housing: PC	EMC R10 ECE R65 TA2 SAE J845 Class1 CISPR 25 Class 3	Magnet	2500 mm Cable With Cigar Plug
WA111CA-002						Screw	500 mm Cable
WA111CA-003						DIN-Pole:TPE (W/ O Switch)	Connector
WA111CA-004						DIN-Pole:TPE (With Switch)	Connector