



**12-621C3A**

**WA-621 DIRECTIONAL Lamp**

**DESCRIPTION**

Low Current Consumption;  
Surface Mount;  
Lens: Pc, color according to customer requirement;  
Housing: ADC12, black powder.

**VOLTAGE MOUNT**

10-30V  
Surface Mount

**CURRENT CONSUMPTION**

12W

**LENS COLOR**

Amber

**WARRANTY**

3 years

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C

**CABLE LENGTH**

0.5m

**PACKAGING**



Net Weight: 0.15KG    Innerbox: 51\*41\*145mm  
Outer Packing Carton: 440\*270\*163mm    Packing Qty: 50PCS/CTN



PART NUMBER	LED COLOR	FUNCTION	APPROVALS	LEDs	POWER
12-621C3A		FLASH	ECE R65/R10(EMC)	6PCS 3W SMD AMBER LED	12W
12-621C3B			ECE R65/R10(EMC)	6PCS 3W SMD BLUE LED	12W
12-621C3R			ECE R10(EMC)	6PCS 3W SMD RED LED	12W
12-621C3W			ECE R10(EMC)	6PCS 3W SMD WHITE LED	12W
12-621C3AW			ECE R10(EMC)	3PCS 3W SMD AMBER LED 3PCS 3W SMD WHITE LED	12W
12-621C3BW			ECE R10(EMC)	3PCS 3W SMD BLUE LED 3PCS 3W SMD WHITE LED	12W
12-621C3RW			ECE R10(EMC)	3PCS 3W SMD RED LED 3PCS 3W SMD WHITE LED	12W
12-621C3BR			ECE R10(EMC)	3PCS 3W SMD RED LED 3PCS 3W SMD BLUE LED	12W

Flash patterns	
Flash patterns	FPM (Flashes per minute)
1. Single	100
2. Quad(left-right split)	75
3. Quint(left-right split)	60
4. Triple(left-right split)	100
5. Mega	1200
6. Double(left-right split)	75
7. Triple	100
8. Single(ECE)(1)	93
9. Single(ECE)(2)	146
10. Combine	112

Wire Code Table	
WIRE COLOR	CONNECT TO:
RED	10-30VDC
BLACK	Negative (-)
WHITE	Pattern select

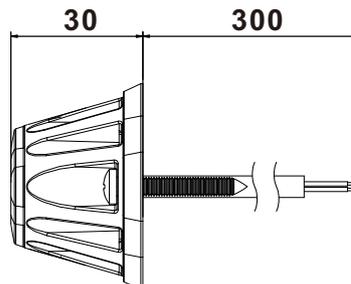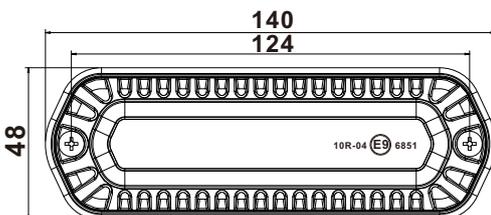

DIRECTIONAL LAMPS

