



WA-060C2A-AFP
Amber Warning And Front Position Lamp
Specification

Picture



Voltage: 10-30V

Function: Warning And Front Position(Diffused)

Housing: Die Cast Aluminium

Lens: PC

Warranty: 3Years

Mounting: Screw

IP grade: IP67

Sealing: Potting

Temperature: -40°C to +60°C

Connection: 300mm Cable



Weight: 70g

Packing: TBD

Part Name	WA-060C2A-AFP
Function	Amber Warning And Front Position(Diffused)
Power	Warning: 9W/Front Position: 1W
LED Quantity	Warning: 6PCS/Front Position: 24PCS
Approvals	ECE R10/R65 Class 2/R7,SAE Class 1

Warning Function Flash Mode			
1	Single(Cycle:480ms)By Day.ECE SAE	6	Quad (Cycle:816ms)
2	By Night(Cycle:480ms).ECE SAE	7	Single+Double (Cycle:2040ms)
3	Single (CAT13, Cycle:800ms)	8	Single+Triple (Cycle:2200ms)
4	Double (Cycle:696ms)	9	Double+Triple (Cycle:3204ms)
5	Triple (Cycle:792ms)	10	Strobe (Cycle:40ms)

Size(mm)

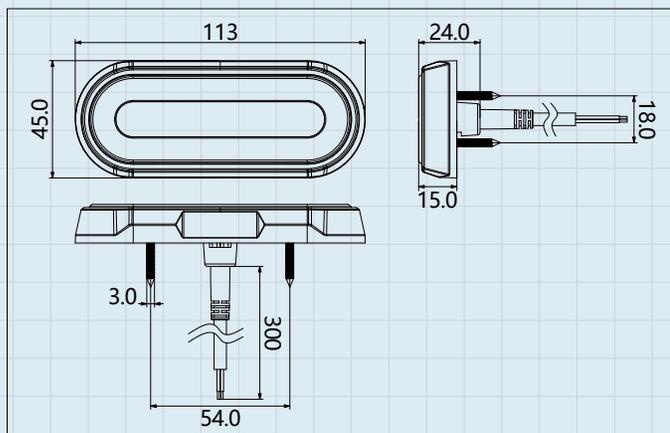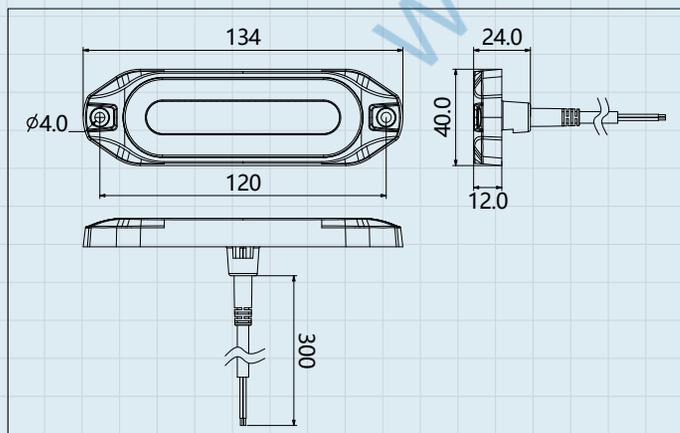

Project phase : Concept Development Pre-production



WA-060C2A-ARP
Amber Warning And Rear Position Lamp
Specification

Picture





- Voltage:** 10-30V
- Function:** Warning And Rear Position(Diffused)
- Housing:** Die Cast Aluminium
- Lens:** PC
- Warranty:** 3Years
- Mounting:** Screw
- IP grade:** IP67
- Sealing:** Potting
- Temperature:** -40°C to +60°C
- Connection:** 300mm Cable
- Weight:** 70g
- Packing:** TBD

Part Name	WA-060C2A-ARP
Function	Amber Warning/Rear Position(Diffused)
Power	Warning: 9W/Rear Position: 1.6W
LED Quantity	Warning: 6PCS/Rear Position: 24PCS
Approvals	ECE R10/R65 Class 2/R7,SAE Class 1

Warning Function Flash Mode			
1	Single(Cycle:480ms)By Day.ECE SAE	6	Quad (Cycle:816ms)
2	By Night(Cycle:480ms).ECE SAE	7	Single+Double (Cycle:2040ms)
3	Single (CAT13, Cycle:800ms)	8	Single+Triple (Cycle:2200ms)
4	Double (Cycle:696ms)	9	Double+Triple (Cycle:3204ms)
5	Triple (Cycle:792ms)	10	Strobe (Cycle:40ms)

Size(mm)

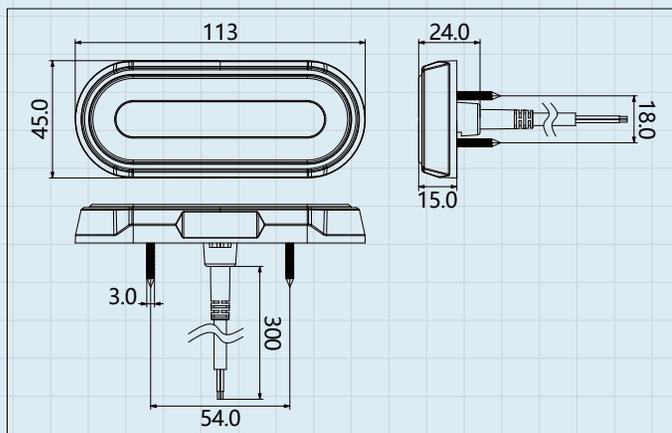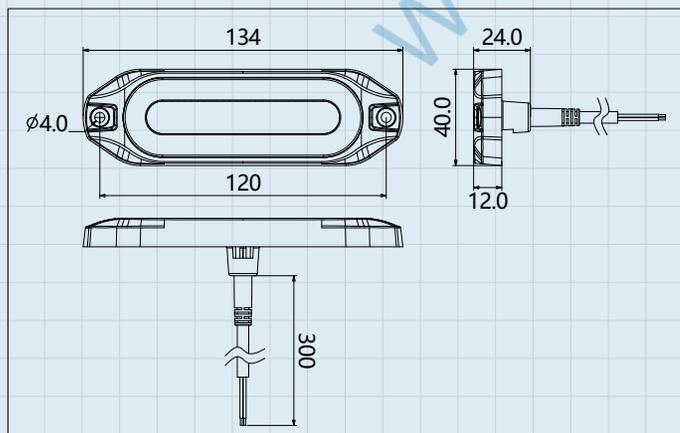

Project phase : Concept Development Pre-production



WA-060C2A-ASM
Amber Warning And Side Mark Lamp
Specification

Picture





- Voltage:** 10-30V
- Function:** Warning And Side Mark(Diffused)
- Housing:** Die Cast Aluminium
- Lens:** PC
- Warranty:** 3Years
- Mounting:** Screw
- IP grade:** IP67
- Sealing:** Potting
- Temperature:** -40°C to +60°C
- Connection:** 300mm Cable
- Weight:** 70g
- Packing:** TBD

Part Name	WA-060C2A-ASM
Function	Amber Warning And Side Mark(Diffused)
Power	Warning: 9W/Side Mark: 1W
LED Quantity	Warning: 6PCS/Side Mark: 24PCS
Approvals	ECE R10/R65 Class 2/R7,SAE Class 1

Warning Function Flash Mode			
1	Single(Cycle:480ms)By Day,ECE SAE	6	Quad (Cycle:816ms)
2	By Night(Cycle:480ms),ECE SAE	7	Single+Double (Cycle:2040ms)
3	Single (CAT13, Cycle:800ms)	8	Single+Triple (Cycle:2200ms)
4	Double (Cycle:696ms)	9	Double+Triple (Cycle:3204ms)
5	Triple (Cycle:792ms)	10	Strobe (Cycle:40ms)

Size(mm)

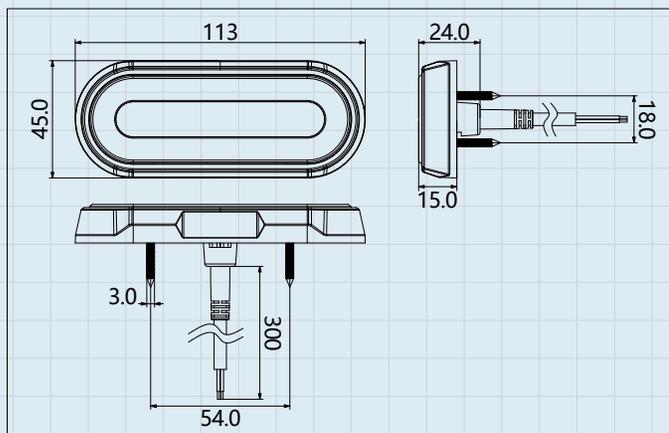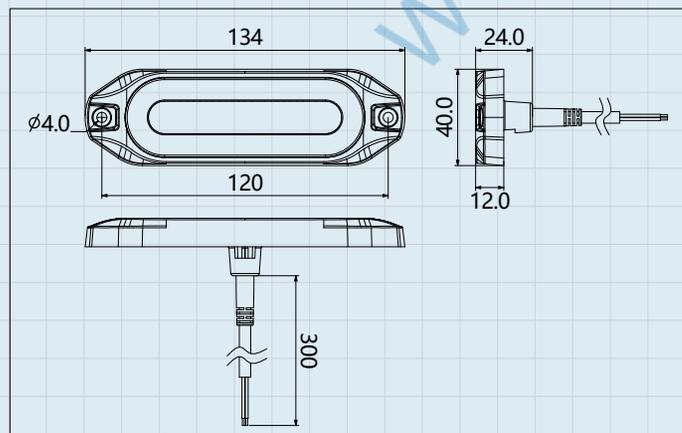

Project phase : Concept Development Pre-production