


**WA-028 Series  
Warning Lamp**



**Picture**

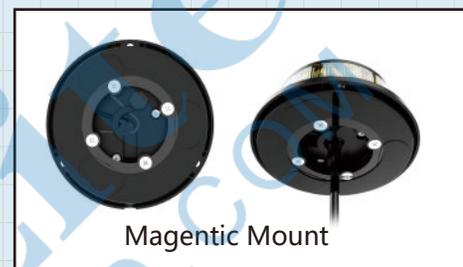

Magnetic Mount



**Specification**

**Voltage:** 12/24V

**Mount:** Magnetic Installation /Screw Mount

**Approval:** ECE R65/ R10(EMC)/ SAE J845 Class 1

**Warranty:** 3 Years

**Lens Color:** Transparent or color

**Waterproof:** IP 67



**Operating Temperature:** -40°C to +60°C

**Cable Length:** 2500mm

**Package:** Inner Box:117\*117\*58mm,  
Carton:368\*315\*255mm,  
Qty:1/30PCS/CTN

Part Number	Color	Voltage	Peak Power	Mounting	Approvals
WA-028C2R-MG	Red	12/24V	24W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2R-ST				Screw Mount	
WA-028C2A-MG	Yellow		27W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2A-ST				Screw Mount	
WA-028C2B-MG	Blue		27W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2B-ST				Screw Mount	

**Size(mm)**

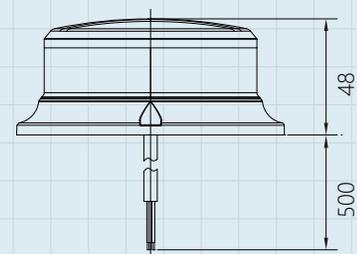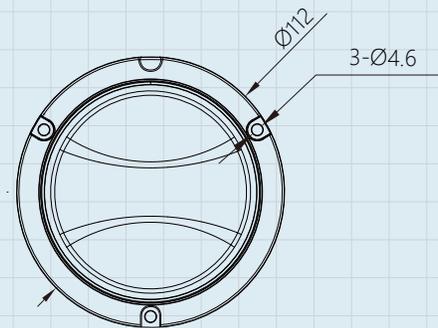

**Flash Mode**

	Pattern	Cycle		Pattern	Cycle
1	Single (ECE/SAE)	480ms	2	Single	800ms
3	Double	400ms	4	Double	800ms
5	Triple	820ms	6	Quad	820ms
7	F&B half	400ms	8	F&B half	800ms
9	Rotated	800ms	10	Rotated	400ms

WARNING LAMP

Fordalite



## WA-028 (CISPR 25 CLASS 5)

### FEATURES

- ECE R65 CLASS 1 certificated.
- CIRPR 25 CLASS 5 approved.
- Low profile design.
- Robust cover and housing.



Warning Lamp

#### FLASH PATTERN

# 1	Single (ECE/ SAE), Cycle: 480 ms	# 6	Quad, Cycle: 820 ms
# 2	Single, Cycle: 800 ms	# 7	F&B half, Cycle: 400 ms
# 3	Double, Cycle: 400 ms	# 8	F&B half, Cycle: 800 ms
# 4	Double, Cycle: 800 ms	# 9	Rotation, Cycle: 800 ms
# 5	Triple, Cycle: 820 ms	# 10	Rotation, Cycle: 400 ms

Part NO.	Color	Voltage	Power	Material	Mounting	Connection
WA-028C2A-C5-ST-AL/PL	Amber	DC 10-30 V	32 PCS*1 W	Lens:PC Housing: PC/ ADC12	Screw	500mm Cable
WA-028C2A-C5-MG-AL/PL					Magnet	2500mm Switch
WA-028C2A-C5-TPE					DIN-Pole:TPE (With Switch ; W/ O Switch)	Connector

**EFFICIENT SOLUTIONS  
FOR A BRIGHTER FUTURE**



# WA-028-DIN

## Picture



## Specification



**Voltage:** 12/24V  
**Function:** Amber/ Red/ Blue warning lamp  
**Din-A:** TPE  
**Lens:** PC  
**Inner lens:** PC  
**Approval:** ECE R65/ R10(EMC) / SAE J845 Class 1  
**Warranty:** 3 Years  
**Mounting:** Din-A (with pattern switch button/ without)  
**IP grade:** IP 67  
**Sealing:** Potting  
**Operating Temperature:** -40°C to +65°C  
**Weight:** 0.391 KG  
**Package:** Inner Box:102\*102\*150mm  
 Carton:430\*220\*320mm  
 Qty:16 PCS/ Carton



## Size(mm)

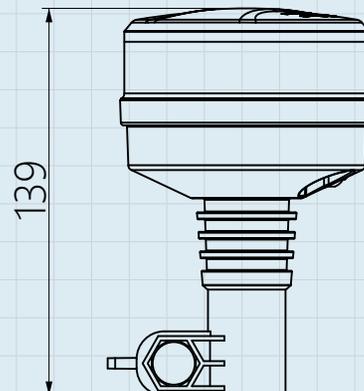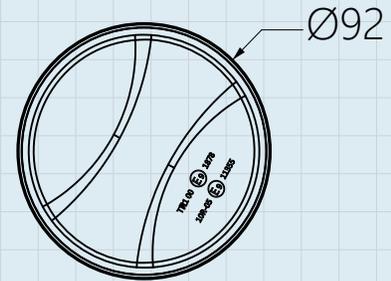

Part Number	Color	Voltage	Peak Power	Mounting	Approvals
WA-028C2R-PP	Red	12/24V	24W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1
WA-028C2A- PP	Yellow		27W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1
WA-028C2B- PP	Blue		27W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1

### Flash Mode(Without Button Default: Single Flash Pattern 1)

	Pattern	Cycle		Pattern	Cycle
1	Single (ECE/SAE)	480ms	2	Single	800ms
3	Double	400ms	4	Double	800ms
5	Triple	820ms	6	Quad	820ms
7	F&B half	400ms	8	F&B half	800ms
9	Rotated	800ms	10	Rotated	400ms

WARNING LAMP

Fordalite