

**WA-028 Series
Warning Lamp**



Picture



Specification

Voltage: 12/24V

Mount: Magnetic Installation /Screw Mount

Approval: ECE R65/ R10(EMC)/ SAE J845 Class 1

Warranty: 3 Years

Lens Color: Transparent or color

Waterproof: IP 67



Operating Temperature: -40°C to +60°C

Cable Length: 2500mm

Package: Inner Box:117*117*58mm,
Carton:368*315*255mm,
Qty:1/30PCS/CTN

Part Number	Color	Voltage	Peak Power	Mounting	Approvals
WA-028C2R-MG	Red	12/24V	24W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2R-ST				Screw Mount	
WA-028C2A-MG	Yellow		27W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2A-ST				Screw Mount	
WA-028C2B-MG	Blue		27W	Magnetic Mount	ECE R10 ECE R65 Class 1 SAE J845 Class 1
WA-028C2B-ST				Screw Mount	

Size(mm)

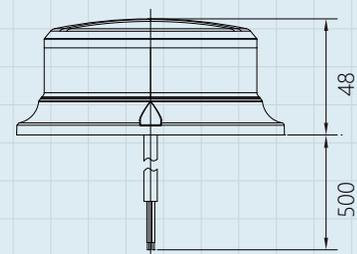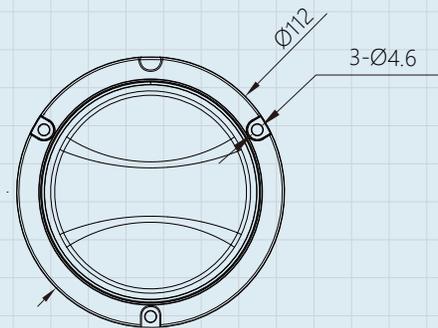

Flash Mode

	Pattern	Cycle		Pattern	Cycle
1	Single (ECE/SAE)	480ms	2	Single	800ms
3	Double	400ms	4	Double	800ms
5	Triple	820ms	6	Quad	820ms
7	F&B half	400ms	8	F&B half	800ms
9	Rotated	800ms	10	Rotated	400ms

WARNING LAMP

Fordalite



WA-028 (CISPR 25 CLASS 5)

FEATURES

- ECE R65 CLASS 1 certificated.
- CIRPR 25 CLASS 5 approved.
- Low profile design.
- Robust cover and housing.



FLASH PATTERN

# 1	Single (ECE/ SAE), Cycle: 480 ms	# 6	Quad, Cycle: 820 ms
# 2	Single, Cycle: 800 ms	# 7	F&B half, Cycle: 400 ms
# 3	Double, Cycle: 400 ms	# 8	F&B half, Cycle: 800 ms
# 4	Double, Cycle: 800 ms	# 9	Rotation, Cycle: 800 ms
# 5	Triple, Cycle: 820 ms	# 10	Rotation, Cycle: 400 ms

Part NO.	Color	Voltage	Power	Material	Mounting	Connection
WA-028C2A-C5-ST-AL/PL	Amber	DC 10-30 V	32 PCS*1 W	Lens:PC Housing: PC/ ADC12	Screw	500mm Cable
WA-028C2A-C5-MG-AL/PL					Magnet	2500mm Switch
WA-028C2A-C5-TPE					DIN-Pole:TPE (With Switch; W/ O Switch)	Connector

**EFFICIENT SOLUTIONS
FOR A BRIGHTER FUTURE**



WA-028-DIN

Picture



Specification



Voltage: 12/24V
Function: Amber/ Red/ Blue warning lamp
Din-A: TPE
Lens: PC
Inner lens: PC
Approval: ECE R65/ R10(EMC) / SAE J845 Class 1
Warranty: 3 Years
Mounting: Din-A (with pattern switch button/ without)
IP grade: IP 67
Sealing: Potting
Operating Temperature: -40°C to +65°C
Weight: 0.391 KG
Package: Inner Box:102*102*150mm
 Carton:430*220*320mm
 Qty:16 PCS/ Carton



Size(mm)

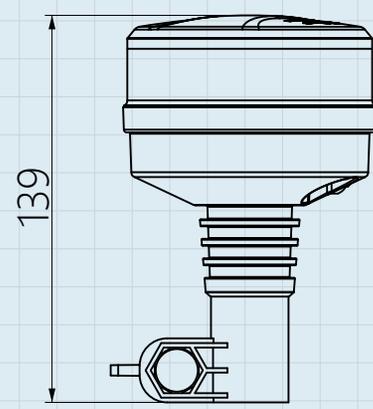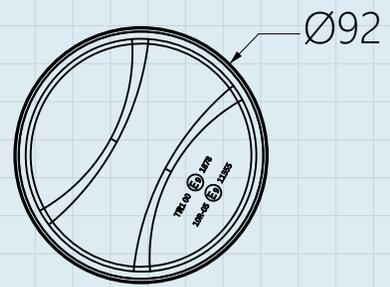

Part Number	Color	Voltage	Peak Power	Mounting	Approvals
WA-028C2R-PP	Red	12/24V	24W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1
WA-028C2A- PP	Yellow		27W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1
WA-028C2B- PP	Blue		27W	Din-A mounting	ECE R65 R10(EMC) SAE J845 Class 1

Flash Mode(Without Button Default: Single Flash Pattern 1)					
	Pattern	Cycle		Pattern	Cycle
1	Single (ECE/SAE)	480ms	2	Single	800ms
3	Double	400ms	4	Double	800ms
5	Triple	820ms	6	Quad	820ms
7	F&B half	400ms	8	F&B half	800ms
9	Rotated	800ms	10	Rotated	400ms

WARNING LAMP

Fordalite