



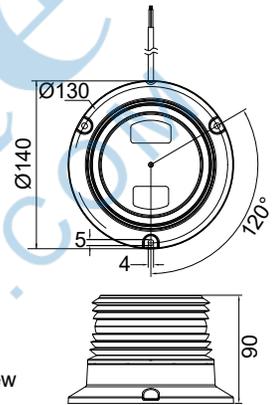



WA-107

FEATURES



- Advanced heat dissipation design ensures product lifetime.
- Convenient installation options, such as magnet installation, bracket installation, bolt installation, to meet the needs of customers in different occasions
- Budget-friendly, economical and affordable, while meeting the needs of customers, it reduces the product investment budget.

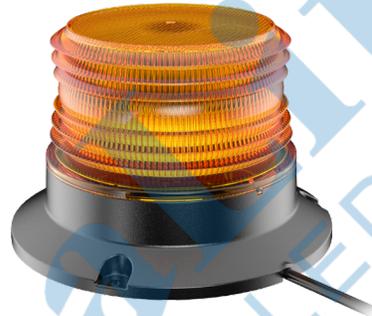


Screw

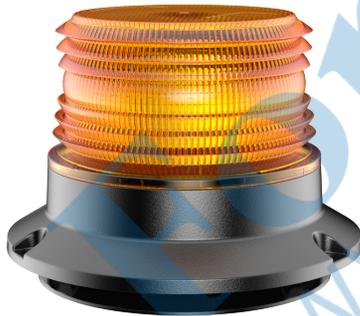



Magnet



DIN-Pole:TPE
(W/ O Switch)



WA-107



DIN-Pole:TPE
(With Switch)

ECE Flash Pattern	
# 1	Single Flash: 480 ms(ECE R65 Class 1)
# 2	Double Flash: 480 ms
# 3	Triple Flash: 480 ms
# 4	Quad Flash: 480 ms
# 5	Qunit Flash: 480 ms
# 6	Strobe: 100 ms
# 7	Cruise

SAE Flash Pattern	
# 1	Single Flash : 800 ms(SAE J845 Class 1)
# 2	Double Flash: 800 ms
# 3	Triple Flash: 800 ms
# 4	Quad Flash: 800 ms
# 5	Qunit Flash: 800 ms
# 6	Strobe: 100 ms
# 7	Cruise

Part NO.	Function	Voltage	Material	Power	Approvals	Mounting	Connection
WA-107C2A-ST-ECE	Amber Warning Lamp	DC 10-30 V	Lens: PC Housing: PC	17 W	ECE R65 Class 1 EMC R10	Screw	500 mm Cable
WA-107C2A-MG-ECE						Magnet	2500 mm Cigar Plug
WA-107C2A-DIN-ECE						DIN-Pole:TPE (W/ O Switch)	Connector
WA-107C2A-DIN-ECE-001						DIN-Pole:TPE (With Switch)	Connector
WA-107C2A-ST-SAE				9.8 W	SAE J845 Class 1 EMC R10	Screw	500 mm Cable
WA-107C2A-MG-SAE						Magnet	2500 mm Cigar Plug
WA-107C2A-DIN-SAE						DIN-Pole:TPE (W/ O Switch)	Connector
WA-107C2A-DIN-SAE-001						DIN-Pole:TPE (With Switch)	Connector