





WA-105

FEATURES


- More connections available in Din-Pole, cable, 2500 mm cigar plug. to meet customer needs in different occasions.
- Convenient installation options, such as magnet installation, screw installation, to meet the needs of customers in different occasions.
- Using high thermal conductivity plastic (3W) housing to meet the heat dissipation, and making the product more lighter, and the lower cost will be more favored by customers.




WA-105C2A-ST
(With Synchronous & Asynchronous function.)

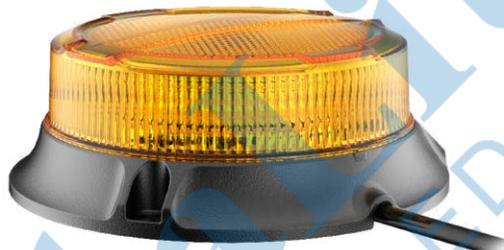


WA-105C2A-MG

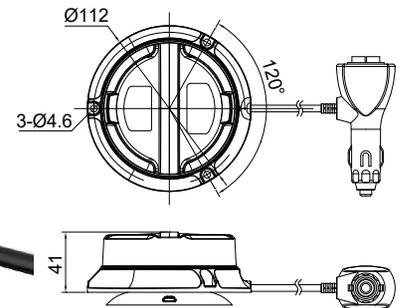

WA-105C2A-DIN

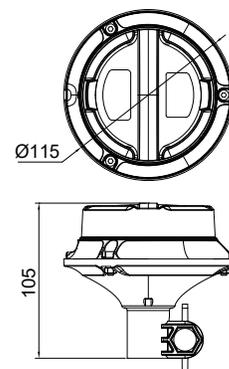

WA-105

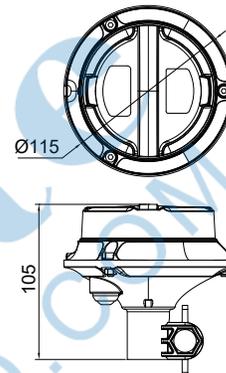

WA-105C2A-DIN-SW

Amber Flash Pattern

# 1	Single Flash(ECE, By Night): 480 ms	# 6	Clockwise Rotating: 480 ms
# 2	Single Flash(SAE): 800 ms	# 7	Counterclockwise Rotating: 480 ms
# 3	Double Flash: 480 ms	# 8	Symmetrical Rotation: 240 ms
# 4	Quad Flash: 480 ms	# 9	Symmetrical Rotation(Double Flash): 480 ms
# 5	Strobe: 100 ms	# 10	Cruise

Part NO.	Function	Voltage	Power	Material	Approvals	Mounting	Connection
WA-105C2A-ST	Amber Warning Lamp	DC 10-30 V	26 W	Lens: PC Housing: High Thermal Conductivity Plastic	ECE R65 TA 1 SAE J845 Class 1 ECE R10	Screw	500 mm Cable
WA-105C2A-MG						Magent	2500 mm Cigar Plug
WA-105C2A-DIN						DIN-Pole:TPE (W/ O Switch)	Connector
WA-105C2A-DIN-SW						DIN-Pole:TPE (With Switch)	Connector