




WA110

FEATURES


- More connections available in Din-Pole, 500 mm cable, 2500 mm cable with cigar plug, to meet customer needs in different occasions.
- Multiple mounting options including magnetic, screw, connector, to meet the needs of customers in different occasions.
- Using die cast aluminum housing to meet better heat dissipation
- The higher optical grade of WA110 will meet the higher demand of customers.




WA110CA-001
(With Synchronous & Asynchronous function.)



WA110CA-002

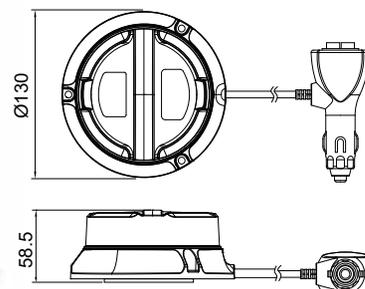


WA110CA-003

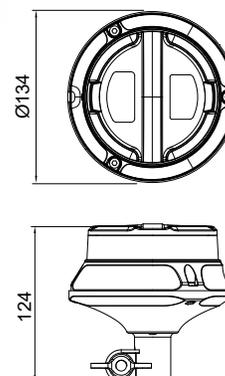

Warning Lamp

WA110

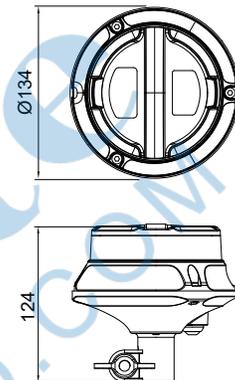

WA110CA-004

Amber Flash Pattern

# 1	Single Flash(ECE, By Day): 480 ms	# 7	Clockwise Rotating: 480 ms
# 2	Single Flash(ECE, By Night): 480 ms	# 8	Counterclockwise Rotating: 480 ms
# 3	Single Flash(SAE): 800 ms	# 9	Symmetrical Rotation: 240 ms
# 4	Double Flash: 480 ms	# 10	Symmetrical Rotation(Double Flash): 480 ms
# 5	Quad Flash: 480 ms	# 11	Cruise
# 6	Strobe: 100 ms		

Part NO.	Function	Voltage	Power	Material	Approvals	Mounting	Connection
WA110CA-001	Amber Warning Lamp	DC 10-30 V	40 W (pending)	Cover: PC Lens: PC Housing: ADC12	ECE R65 Class 2 SAE J845 Class 1 EMC R10 CISPR 25 Class 3	Screw	500 mm Cable
WA110CA-002						Magnet	2500 mm Cable With Cigar Plug
WA110CA-003						DIN-Pole:TPE (W/O Switch)	Connector
WA110CA-004						DIN-Pole:TPE (With Switch)	Connector