

12-R9C2A-R65MZ1

Light Bar

- DESCRIPTION** Low Current Draw Consumption;
Leds: 40 PCS SMD AMBER LED;
Power: 31 W
- VOLTAGE** 12/24V
- MOUNT** Bracket installation
- APPROVALS** ECE R65(AMBER)/R10(EMC)
- WARRANTY** 3 years
- LENS COLOR** Transparent or color
- WATERPROOF** IP 67
- OPERATING TEMPERATURE** -40°C to +65°C
- CABLE LENGTH** 2.5m
- PACKAGING** Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 660*335*108 mm Packing Qty:1PCS/CTN





FLASH PATTERNS			
1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint



PART NUMBER	LED COLOR	APPROVALS	LEDs	POWER
12-R9C2R-R65 MZ1		ECE R10(EMC)	40PCS SMD RED LED	31W
12-R9C2A-R65 MZ1		ECE R65/R10(EMC)	40PCS SMD AMBER LED	31W
12-R9C2B-R65 MZ1		ECE R10(EMC)	40PCS SMD BLUE LED	31W
12-R9C2W-R65 MZ1		ECE R10(EMC)	40PCS SMD WHITE LED	31W

EMERGENCY LIGHTS

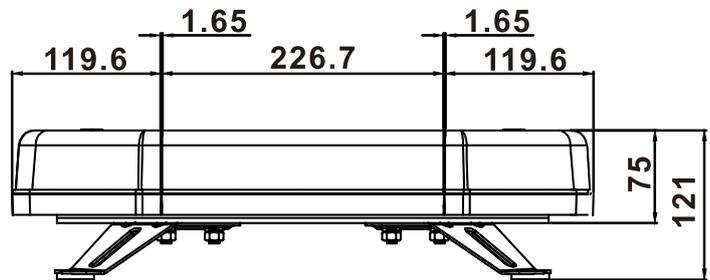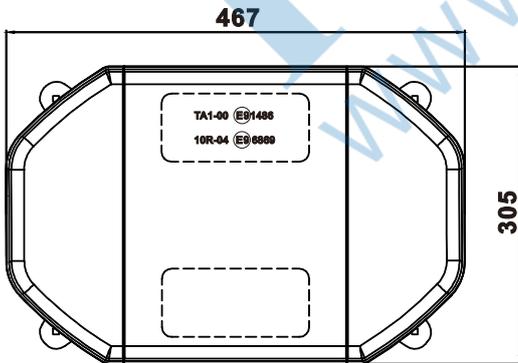



12-R9C2A-R65MZ2

Light Bar



- DESCRIPTION** Low Current Draw Consumption;
Leds: 56 PCS SMD AMBER LED;
Power: 42 W
- VOLTAGE** 12/24V
- MOUNT** Bracket installation
- APPROVALS** ECE R65(AMBER)/R10(EMC)
- WARRANTY** 3 years
- LENS COLOR** Transparent or color
- WATERPROOF** IP 67
- OPERATING TEMPERATURE** -40°C to +65°C
- CABLE LENGTH** 2.5m
- PACKAGING** Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 880*335*108 mm Packing Qty:1PCS/CTN



FLASH PATTERNS			
1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint



PART NUMBER	LED COLOR	APPROVALS	LEDs	POWER
12-R9C2R-R65 MZ2		ECE R10(EMC)	56PCS SMD RED LED	42W
12-R9C2A-R65 MZ2		ECE R65/R10(EMC)	56PCS SMD AMBER LED	42W
12-R9C2B-R65 MZ2		ECE R10(EMC)	56PCS SMD BLUE LED	42W
12-R9C2W-R65 MZ2		ECE R10(EMC)	56PCS SMD WHITE LED	42W

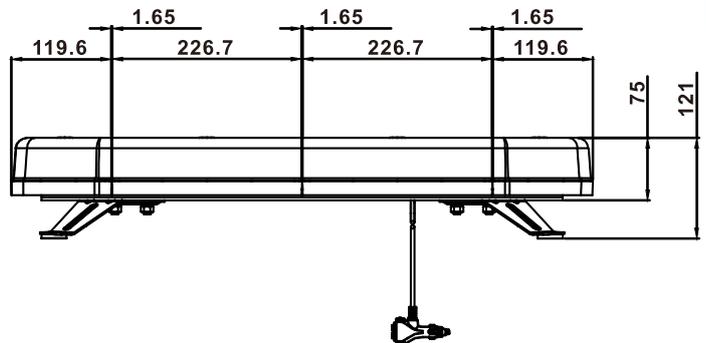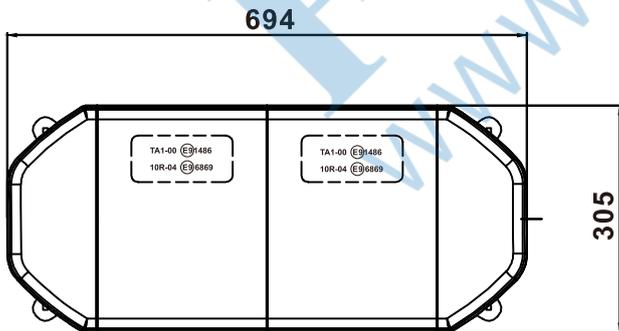

EMERGENCY LIGHTS





12-R9C2A-R65MZ3

Light Bar

DESCRIPTION Low Current Draw Consumption;
Leds: 72 PCS SMD AMBER LED;
Power: 57 W

VOLTAGE 12/24V

MOUNT Bracket installation

APPROVALS ECE R65(AMBER)/R10(EMC)

WARRANTY 3 years

LENS COLOR Transparent or color

WATERPROOF IP 67

OPERATING TEMPERATURE -40°C to +65°C

CABLE LENGTH 2.5m

PACKAGING Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 1113*335*108 mm Packing Qty:1PCS/CTN





FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	LED COLOR	APPROVALS	LEDs	POWER
12-R9C2R-R65 MZ3		ECE R10(EMC)	72PCS SMD RED LED	57W
12-R9C2A-R65 MZ3		ECE R65/R10(EMC)	72PCS SMD AMBER LED	57W
12-R9C2B-R65 MZ3		ECE R10(EMC)	72PCS SMD BLUE LED	57W
12-R9C2W-R65 MZ3		ECE R10(EMC)	72PCS SMD WHITE LED	57W

921.5

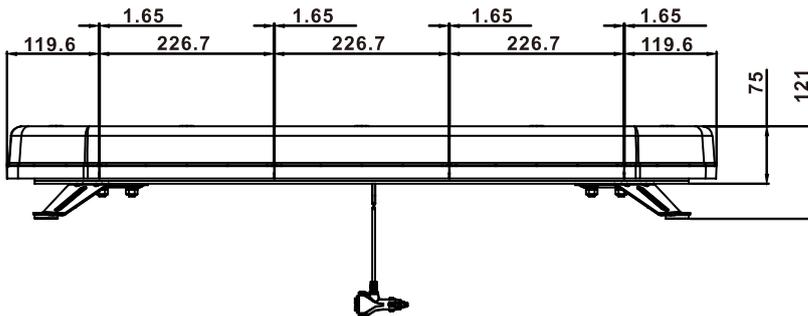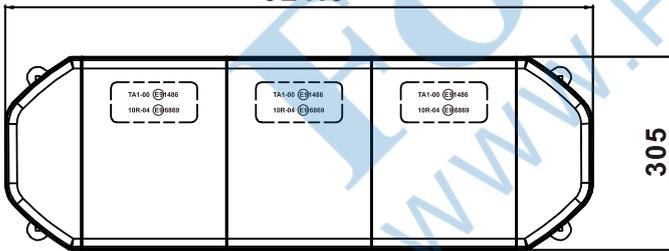

EMERGENCY LIGHTS





12-R9C2A-R65MZ4

Light Bar

DESCRIPTION Low Current Draw Consumption;
Leds: 88 PCS SMD AMBER LED;
Power: 66 W

VOLTAGE 12/24V
MOUNT Bracket installation

APPROVALS ECE R65(AMBER)/R10(EMC)

WARRANTY 3 years

LENS COLOR Transparent or color

WATERPROOF IP 67

OPERATING TEMPERATURE -40°C to +65°C

CABLE LENGTH 2.5m

PACKAGING Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton : 1340*335*108 mm Packing Qty:1 PCS/CTN





FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	LED COLOR	APPROVALS	LEDs	POWER
12-R9C2R-R65 MZ4		ECE R10(EMC)	88PCS SMD RED LED	66W
12-R9C2A-R65 MZ4		ECE R65/R10(EMC)	88PCS SMD AMBER LED	66W
12-R9C2B-R65 MZ4		ECE R10(EMC)	88PCS SMD BLUE LED	66W
12-R9C2W-R65 MZ4		ECE R10(EMC)	88PCS SMD WHITE LED	66W

1148.8

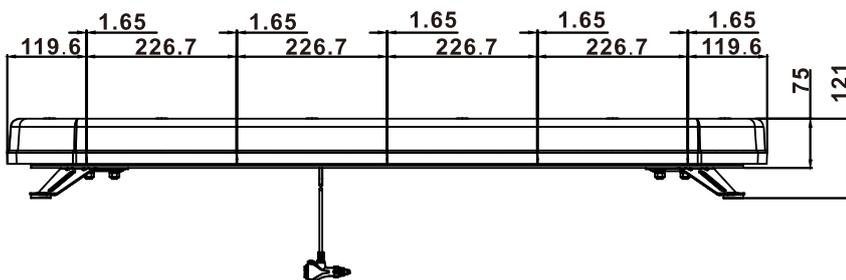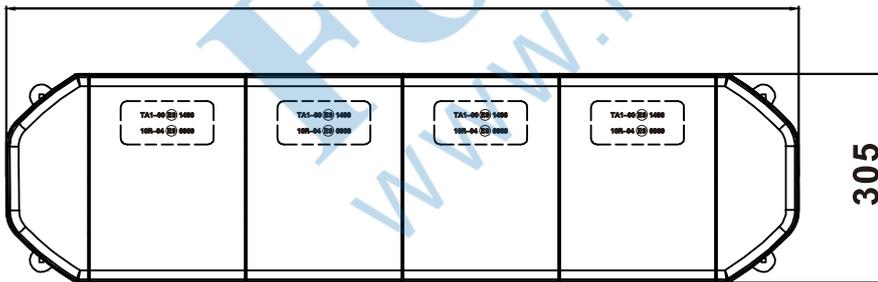



12-R9C2A-R65MZ5

Light Bar

- DESCRIPTION** Low Current Draw Consumption;
Leds: 104 PCS SMD AMBER LED;
Power: 76 W
- VOLTAGE** 12/24V
- MOUNT** Bracket installation
- APPROVALS** ECE R65(AMBER)/R10(EMC)
- WARRANTY** 3 years
- LENS COLOR** Transparent or color
- WATERPROOF** IP 67
- OPERATING TEMPERATURE** -40°C to +65°C
- CABLE LENGTH** 2.5m
- PACKAGING** Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: _____mm Packing Qty: 1PCS/CTN





FLASH PATTERNS			
1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint



PART NUMBER	LED COLOR	APPROVALS	LEDs	POWER
12-R9C2R-R65 MZ5		ECE R10(EMC)	104PCS SMD RED LED	76W
12-R9C2A-R65 MZ5		ECE R65/R10(EMC)	104PCS SMD AMBER LED	76W
12-R9C2B-R65 MZ5		ECE R10(EMC)	104PCS SMD BLUE LED	76W
12-R9C2W-R65 MZ5		ECE R10(EMC)	104PCS SMD WHITE LED	76W

1378.5

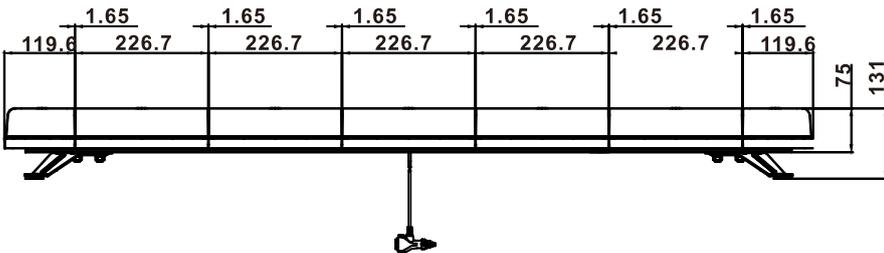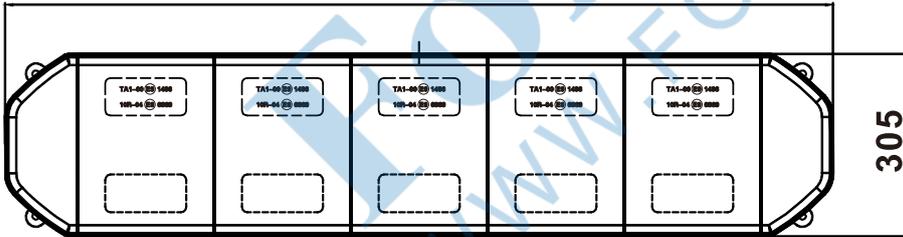

EMERGENCY LIGHTS

