

WA-027 Light Bar





Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 43W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:857*256*80mm
Qty:1/2PCS/CTN

Size(mm)

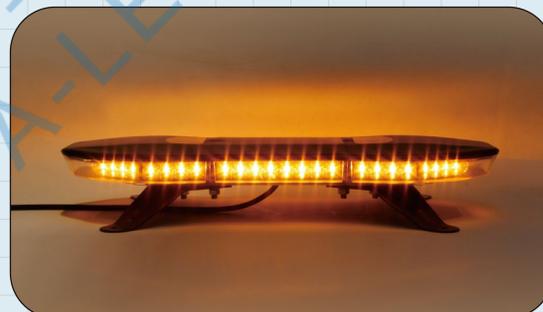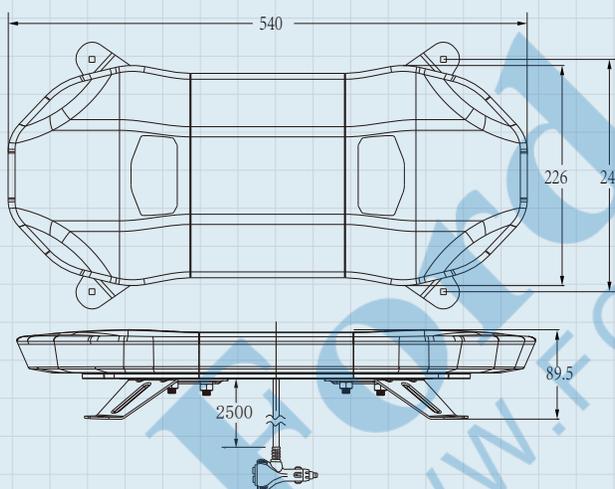

Flash Mode

1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E1		ECE R65 /R10(EMC)	43W
WA-027C2A-S1		SAE J845 Class 1	43W

WARNING LAMP

Fordalite

**EFFICIENT SOLUTIONS
FOR A BRIGHTER FUTURE**



Fordalite
Guangzhou Forda Signal Co.,Ltd

WA-027 Light Bar





Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 54W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1017*256*80mm
Qty:1PCS/CTN

Size(mm)

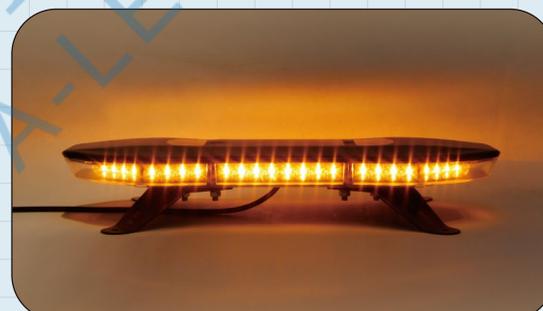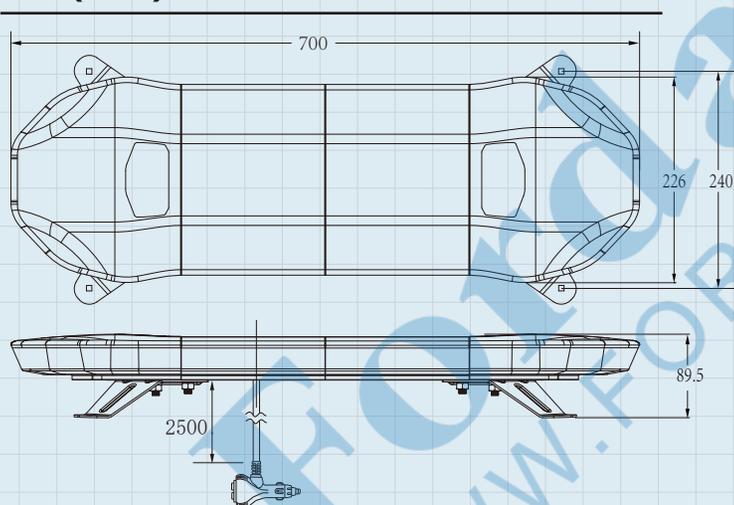

Flash Mode

1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E2		ECE R65 /R10(EMC)	54W
WA-027C2A-S2		SAE J845 Class 1	54W

WARNING LAMP

Fordalite

WA-027 Light Bar




Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 65W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1177*256*80mm
Qty:1PCS/CTN

Size(mm)

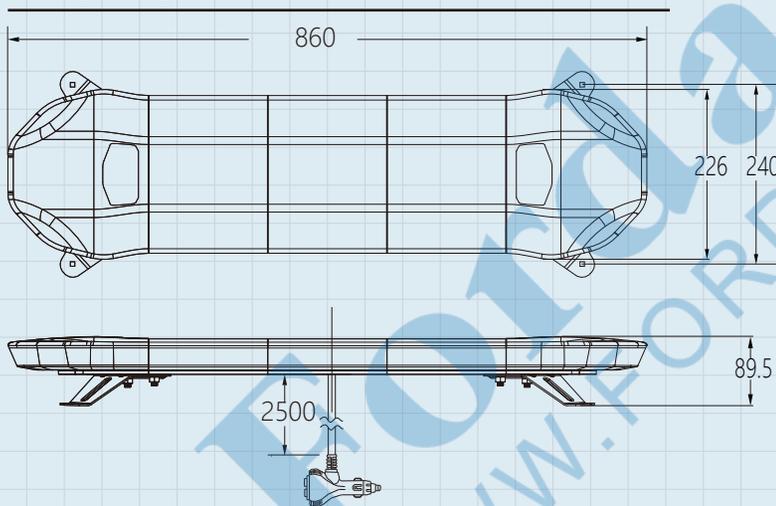

Flash Mode			
1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E3		ECE R65 /R10(EMC)	65W
WA-027C2A-S3		SAE J845 Class 1	65W

WARNING LAMP

Fordalite

WA-027 Light Bar




Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 76W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1337*256*80mm
Qty:1PCS/CTN

Size(mm)

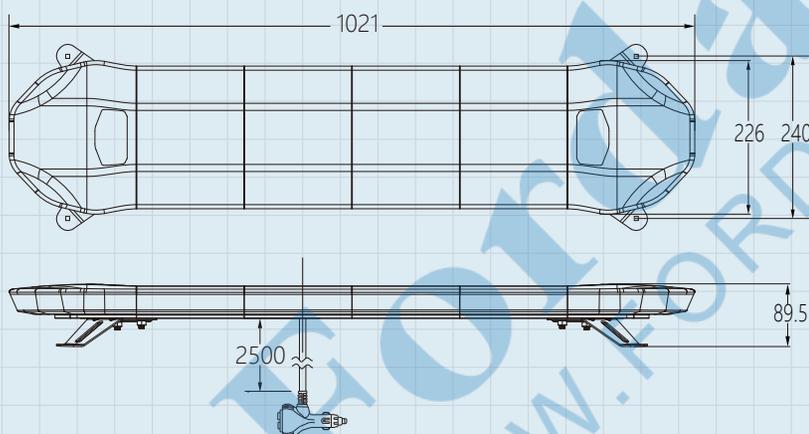

Flash Mode

1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E4		ECE R65 /R10(EMC)	76W
WA-027C2A-S4		SAE J845 Class 1	76W

WARNING LAMP

Fordalite

WA-027 Light Bar




Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 87W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1497*256*80mm
Qty:1PCS/CTN

Size(mm)

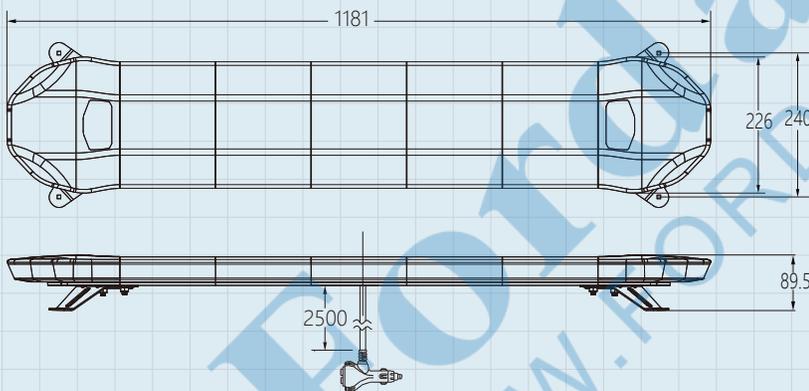

Flash Mode			
1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E5		ECE R65 /R10(EMC)	87W
WA-027C2A-S5		SAE J845 Class 1	87W

WARNING LAMP

FordaLite

WA-027 Light Bar



Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 98W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1657*256*80mm
Qty:1PCS/CTN

Size(mm)



Flash Mode

1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E6		ECE R65 /R10(EMC)	98W
WA-027C2A-S6		SAE J845 Class 1	98W

WARNING LAMP

Fordalite

WA-027 Light Bar




Picture



Specification

- Voltage:** 12/24V
- Peak Power:** 109W
- Mount:** Bracket Mount
- Approvals:** ECE R65/ R10(EMC) / SAE J845 Class 1
- Warranty:** 3 Years
- Lens Color:** Transparent or Color
- Waterproof:** IP 67
- Operating Temperature:** -40°C to +60°C
- Cable Length:** Cable, 2500mm
- Package:** Inner Box:1817*256*80mm
Qty:1PCS/CTN

Size(mm)

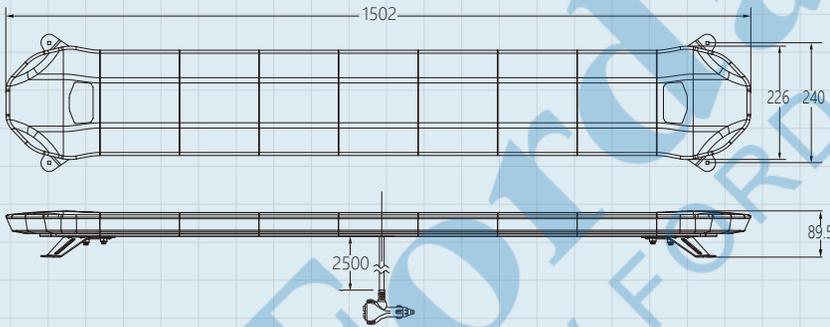

Flash Mode			
1	Single (ECE/SAE),Cycle:480ms	2	Combination(Middle --Both Side --Left Side--Right Side--Left & Right)
3	Combination (1--5)	4	Combination(1--3--5)
5	Combination (Slow Left & Right --Fast Left & Right--All Quintuplicate)	6	Combination (Left & Right Triple--All Triple)
7	Triple Flash	8	Combination (Left & Right Double --All Triple)
9	Combination (Left Triple--Right Triple)	10	Combination (Middle Flash--Both Sides Flash)

Part Number	Color	Approvals	Peak Power
WA-027C2A-E7		ECE R65 /R10(EMC)	109W
WA-027C2A-S7		SAE J845 Class 1	109W

WARNING LAMP

Fordalite