


12-R9C2A-E1
12-R9C2A-S1
Light Bar
DESCRIPTION

Low Current Consumption;
 Leds: 68 PCS SMD AMBER LED;
 Power: 52 W
 12/24V

VOLTAGE
MOUNT
APPROVALS
WARRANTY
LENS COLOR
WATERPROOF
OPERATING TEMPERATURE
CABLE LENGTH
PACKAGING

Bracket installation

ECE R65/R10(EMC)/SAE J845;

3 years

Transparent or color

IP 67

-40°C to +65°C



2.5m

Valve bag: 120*80mm Bubble pack: 220*400mm
 A set of carton: 660*335*108 mm Packing Qty: 1PCS/CTN


FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	APPROVALS	LEDs	POWER
12-R9C2A-E1	ECE R65/R10(EMC)	68PCS SMD AMBER LED	52W
12-R9C2A-S1	SAE J845	68PCS SMD AMBER LED	52W

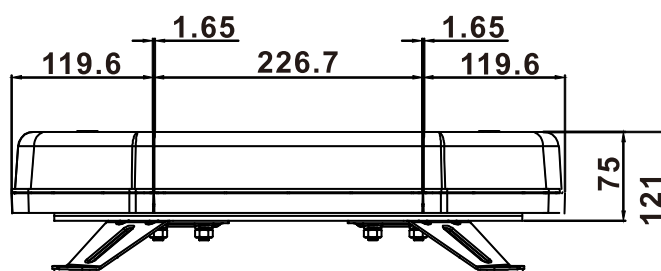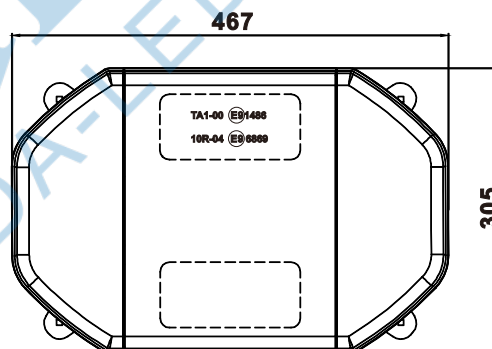

12-R9C2A-E2

12-R9C2A-S2

Light Bar

DESCRIPTION

Low Current Consumption;
Leds: 100 PCS SMD AMBER LED;
Power: 79 W;
Rigged solid state LEDs can withstand shock.
12/24V

VOLTAGE

MOUNT

APPROVALS

WARRANTY

LENS COLOR

WATERPROOF

OPERATING TEMPERATURE

CABLE LENGTH

PACKAGING

Bracket installation
ECE R65/R10(EMC)/SAE J845;
3 years
Transparent or color

IP 67
-40°C to +65°C

2.5m



Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 660*335*108 mm Packing Qty:1PCS/CTN



FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	APPROVALS	LEDs	POWER
12-R9C2A-E2	ECE R65/R10(EMC)	100 PCS SMD AMBER LED	79W
12-R9C2A-S2	SAE J845	100 PCS SMD AMBER LED	79W

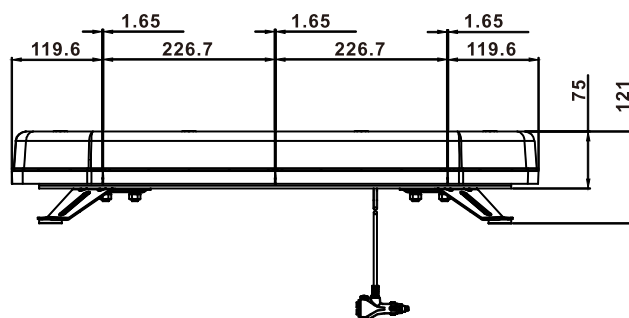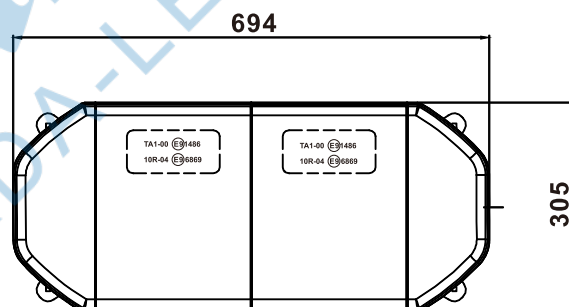



12-R9C2A-E3
12-R9C2A-S3

Light Bar

DESCRIPTION

Low Current Consumption;
Leds: 132 PCS SMD AMBER LED;
Power: 109 W
12/24V

VOLTAGE

MOUNT

Bracket installation

APPROVALS

ECE R65/R10(EMC)/SAE J845;

WARRANTY

3 years

LENS COLOR

Transparent or color

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C

CABLE LENGTH

2.5m

PACKAGING

Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 1113*335*108 mm Packing Qty: 1PCS/CTN



Select Flash Patten



ON/OFF

FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	APPROVALS	LEDs	POWER
12-R9C2A-E3	ECE R65/R10(EMC)	132 PCS SMD AMBER LED	109W
12-R9C2A-S3	SAE J845	132 PCS SMD AMBER LED	109W

EMERGENCY LIGHTS

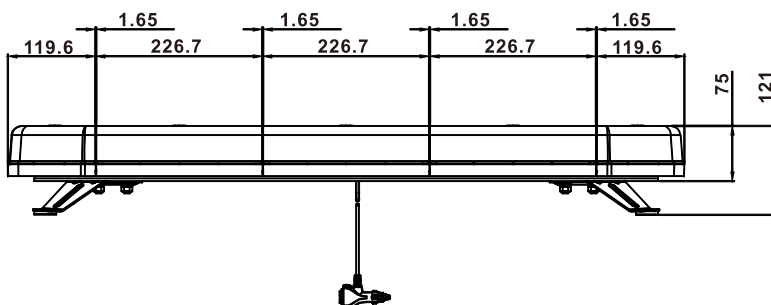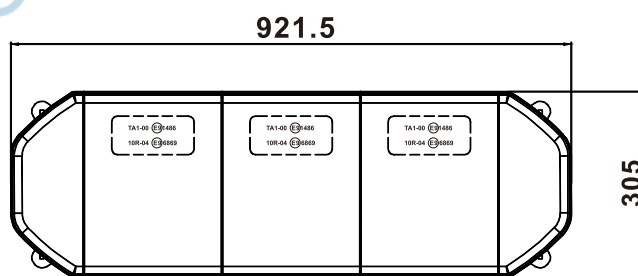

12-R9C2A-E4
12-R9C2A-S4

Light Bar

DESCRIPTION

Low Current Consumption;
Leds: 164 PCS SMD AMBER LED;
Power: 127 W;
Rigged solid state LEDs can withstand shock.

VOLTAGE

12/24V

MOUNT

Bracket installation

APPROVALS

ECE R65/R10(EMC)/SAE J845;

WARRANTY

3 years

LENS COLOR

Transparent or color

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C

CABLE LENGTH

2.5m

PACKAGING

Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: 1340*335*108 mm Packing Qty: 1PCS/CTN





FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	APPROVALS	LEDs	POWER
12-R9C2A-E4	ECE R65/R10(EMC)	164 PCS SMD AMBER LED	127W
12-R9C2A-S4	SAE J845	164 PCS SMD AMBER LED	127W

1148.8

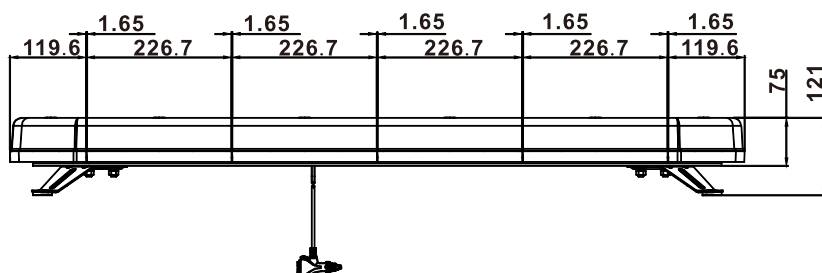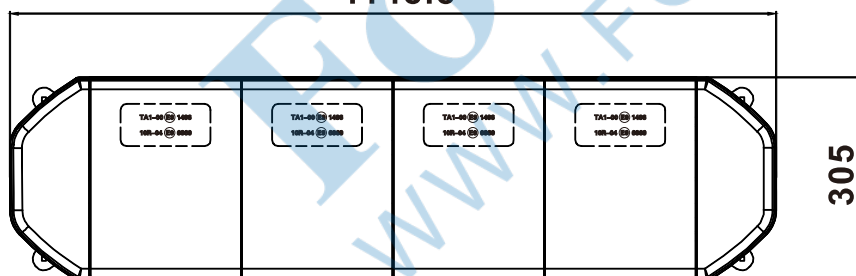



12-R9C2A-E5
12-R9C2A-S5

Light Bar

DESCRIPTION

Low Current Consumption;
Leds: 196 PCS SMD AMBER LED;
Power: 140 W

VOLTAGE

12/24V

MOUNT

Bracket installation

APPROVALS

ECE R65/R10(EMC)/SAE J845;

WARRANTY

3 years

LENS COLOR

Transparent or color

WATERPROOF

IP 67

OPERATING TEMPERATURE

-40°C to +65°C

CABLE LENGTH

2.5m

PACKAGING

Valve bag: 120*80mm Bubble pack: 220*400mm
A set of carton: mm Packing Qty: 1PCS/CTN





FLASH PATTERNS

1	Triple(Left-Right split)	2	Triple(Rear-side-Front)
3	Single(ECE):146	4	Combine(1-3)
5	Single-Triple	6	Single-Triple-Quint
7	H/L Split(Left-Right)-Quad(Full)	8	H/L Split(Full)-Split(Left-Right)
9	Quint	10	Split(Left-Right)-Quint

PART NUMBER	APPROVALS	LEDs	POWER
12-R9C2A-E5	ECE R65/R10(EMC)	196 PCS SMD AMBER LED	140W
12-R9C2A-S5	SAE J845	196 PCS SMD AMBER LED	140W

Select Flash Patten

ON/OFF

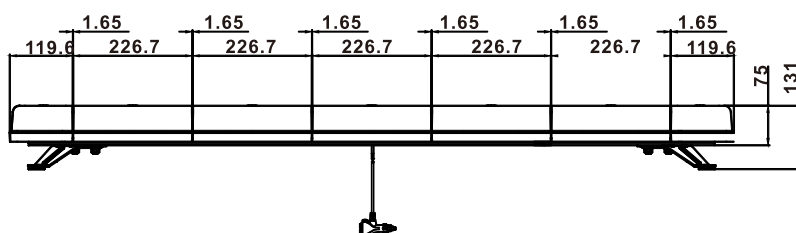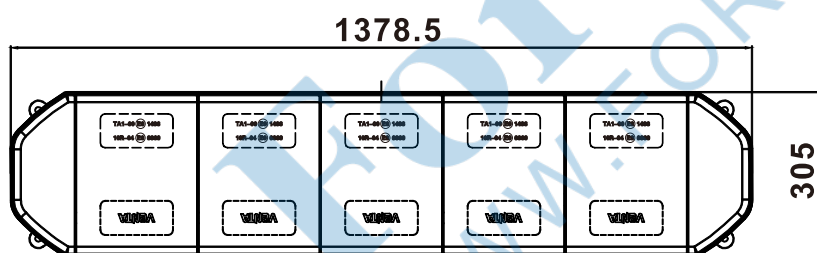

EMERGENCY LIGHTS

