



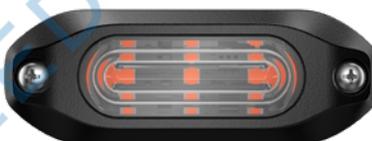

WA-102 SERIES

FEATURES

- High quality and economical , stable products to meet a variety of functional needs, so that the budget is more controllable.
- Equipped with synchronous and asynchronous functions, so that multiple products can work regularly at the same time, giving a wider range of warning prompts.
- Flashing patterns can be customized as required to meet the customer needs in different occasions.
- The unique ultra-thin and compact design makes the product more in line with the aesthetics of customers.

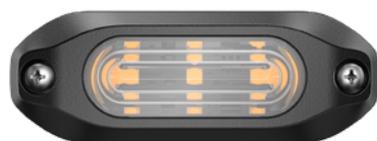


WA-102C3A-02-SYN
WA-102C3A-02

WA-102C3B-02-SYN
WA-102C3B-02

WA-102C3R-02-SYN
WA-102C3R-02

Amber Flash Pattern

# 1	Single Flash(ECE): 480 ms	# 6	Triple Flash: 800 ms
# 2	Single Flash(SAE): 800 ms	# 7	Quint Flash: 480 ms
# 3	Double Flash: 480 ms	# 8	Quint Flash: 800 ms
# 4	Double Flash: 800 ms	# 9	Strobe: 100 ms
# 5	Triple Flash: 480 ms	# 10	Cruise

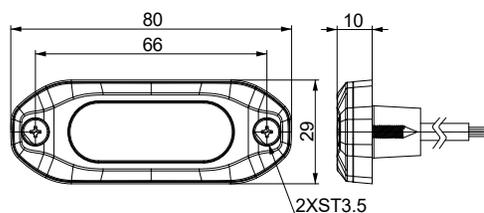

Part NO.	Color	Function	Voltage	Power	Material	Mounting	Connection	Approvals
WA-102C3A-02-SYN	Amber	Synchronous Flashing	DC 10-30 V	Theoretical: 3 PCS* 3 W Real: 6.3 W	Lens: PC Housing: ADC 12	Screw	300 mm Cable	ECE R65 XA1 SAE J595 Class 1 CA T13 Class B EMC R10
WA-102C3B-02-SYN	Blue			Theoretical: 3 PCS* 3 W Real: 9 W				ECE R65 XB1 SAE J595 Class 2 EMC R10
WA-102C3R-02-SYN	Red			Theoretical: 3 PCS* 3 W Real: 6.2 W				ECE R65 XR1 SAE J595 Class 1 EMC R10
WA-102C3A-02	Amber	Synchronous Flashing/ Asynchronous Flashing		Theoretical: 3 PCS* 3 W Real: 6.3 W				ECE R65 XA1 SAE J595 Class 1 CA T13 Class B EMC R10
WA-102C3B-02	Blue			Theoretical: 3 PCS* 3 W Real: 9 W				ECE R65 XB1 SAE J595 Class 2 EMC R10
WA-102C3R-02	Red			Theoretical: 3 PCS* 3 W Real: 6.2 W				ECE R65 XR1 SAE J595 Class 1 EMC R10