





MHDL-008C3W-E-II

FEATURES

- Retro design, bracket installation, easy and convenient installation, suitable for a variety of installation environment headlamp.
- IP69K dustproof and waterproof, safe and reliable in harsh environments.
- High quality thickened aluminum, wear resistance. Fin heat dissipation structure, efficient heat dissipation.

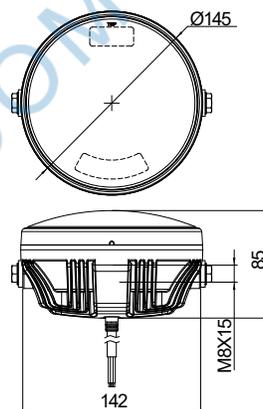


Low Beam



Beam pattern: Flood
Illuminance (LUX)



High Beam

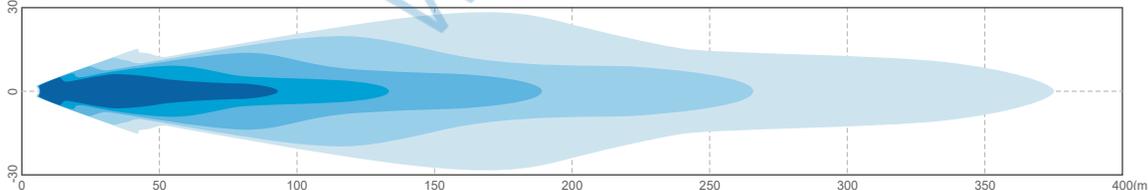

Beam pattern: Spot
Illuminance (LUX)



Part NO.	Function	Power	Lumen (±10%)	Voltage	Material	Mounting	Connection	Approvals
MHDL-008C3W-E-II	High Beam	24.7 W	Raw:2250 LM	DC 10-30 V	Lens: PC+UV Housing: ADC 12	Bracket	Wire	ECE R148 ECE R149 EMC R10 CCC DOT
	Low Beam	17.6 W	Raw:1900 LM					
	Day Running Lamp	8.4 W	—					
	Front Position Lamp	1.3 W	—					

Working Lamp / Head Lamp