




INL-033C2W SERIES

FEATURES

- Low power, high intensity.
- Available in wires, touch switch, PIR(motion sensor) and Door Control.
- Clear, milky and other color options available for outer lens.
- Low profile design makes product super thin and compact .
- Budget-friendly.

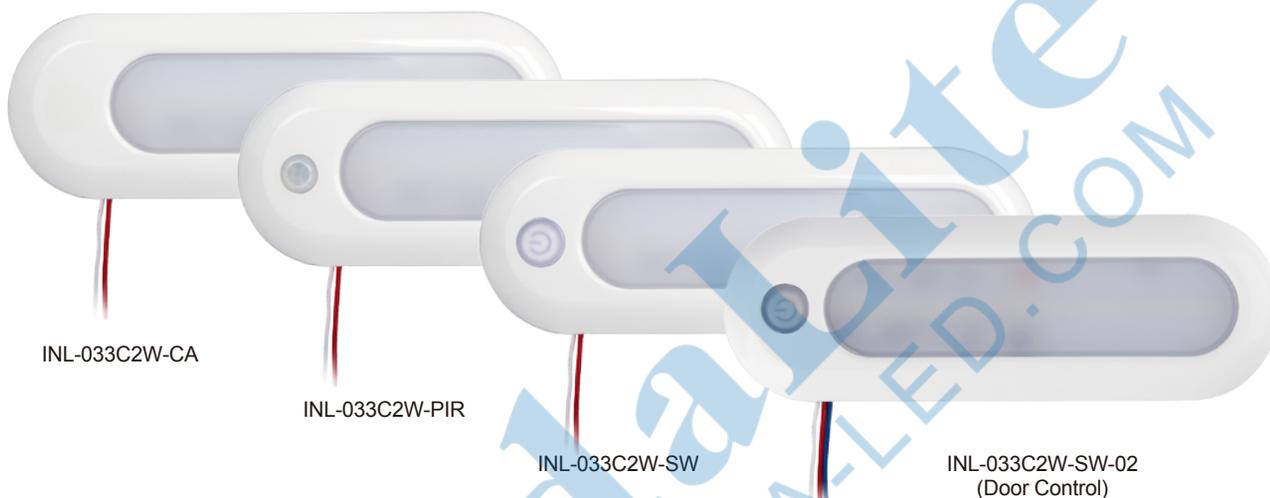


INL-033C2W-CA

INL-033C2W-PIR

INL-033C2W-SW

INL-033C2W-SW-02
(Door Control)

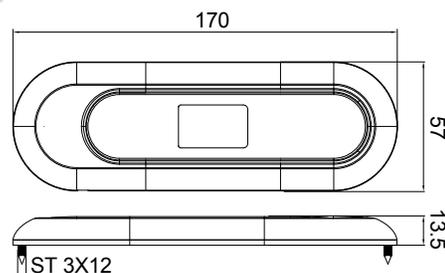


INL-033C2W-SW-02 INSTRUCTIONS:

- 1.Wiring: White wire is connected to negative pole, red wire is connected to positive pole, blue wire is connected to door control switch.
- 2.Light switch description:

SWITCH STATUS	TOUCH SWITCH	DOOR CONTROL SWITCH	LAMP
	ON	ON	ON
	ON	OFF	ON
	OFF	ON	ON
	OFF	OFF	OFF

Note: When powered on for the first time, the touch switch defaults to OFF state.

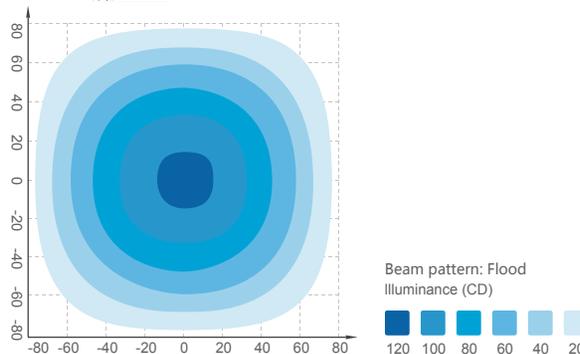

Part NO.	Voltage	Power	Lumen	Color Temperature	Mounting	Connection
INL-033C2W-CA	DC 12/ 24 V	Theoretical: 24 PCS* 0.2 W Actual: 3 W	Raw Lumen: 600 LM Effective Lumen: 250± 30 LM	6000± 500 K	Screws	Wire Length 200 mm
INL-033C2W-PIR						
INL-033C2W-SW						
INL-033C2W-SW-02						