






INL-032C2W SERIES

FEATURES

- Low power, high intensity.
- Available in wires, touch switch, PIR(motion sensor) and Door Control.
- Clear, milky and other color options available for outer lens.
- Low profile design makes product super thin and compact .
- Budget-friendly.

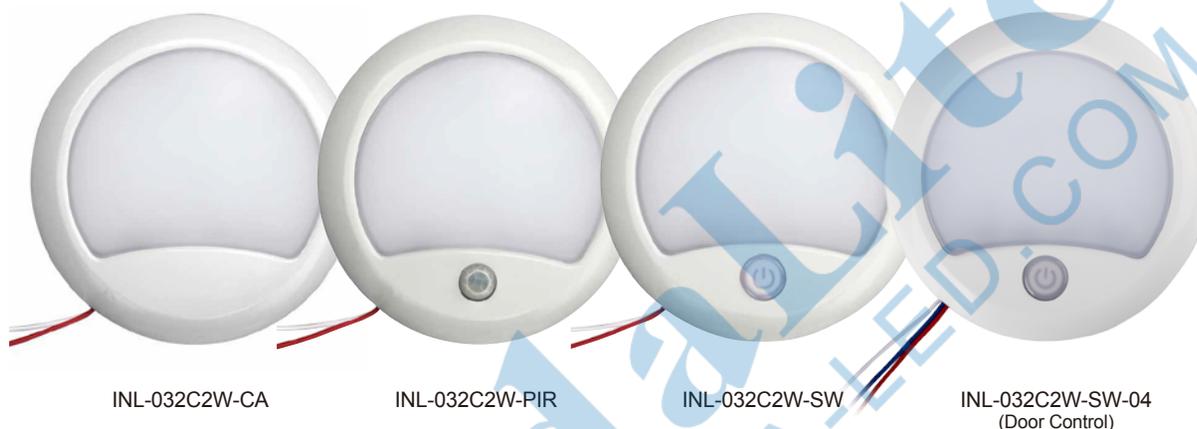


INL-032C2W-SW-04 INSTRUCTIONS:

- 1.Wiring: Red wire & white wire is connected to positive & negative pole separately (Bipolar), blue wire is connected to door control switch.
- 2.Light switch description:

| | TOUCH SWITCH | DOOR CONTROL SWITCH | LAMP |
|---------------|--------------|---------------------|------|
| SWITCH STATUS | ON | ON | ON |
| | ON | OFF | ON |
| | OFF | ON | ON |
| | OFF | OFF | OFF |

Note: When powered on for the first time, the touch switch defaults to OFF state.

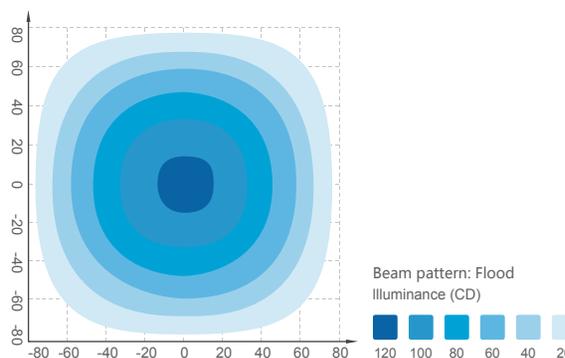

| Part NO. | Voltage | Power | Lumen | Color Temperature | Mounting | Connection |
|------------------|-------------|--|--|-------------------|----------|-----------------------|
| INL-032C2W-CA | DC 12/ 24 V | Theoretical: 26 PCS* 0.2 W Actual: 3 W | Raw Lumen: 650 LM Effective Lumen: 220± 20 LM | 6000± 500 K | Screws | Wire Length 200 mm |
| INL-032C2W-PIR | | | | | | |
| INL-032C2W-SW | | | | | | |
| INL-032C2W-SW-04 | | | | | | |