




DI-001C2A

DI-001

Voltage	12V/24V
Function	Direction indicator
Power	2.2W
Mount	Screws (2*ST4.2*30)
Connection	wires, L=150MM
Approval	EMC R6
Sealing	Ultrasonic welding
IP level	IP67
Lens material	PMMA
Housing material	ABS
Packing	Inner box:38*35*260mm outer carton:425*395*275mm 100PCS/carton



Size

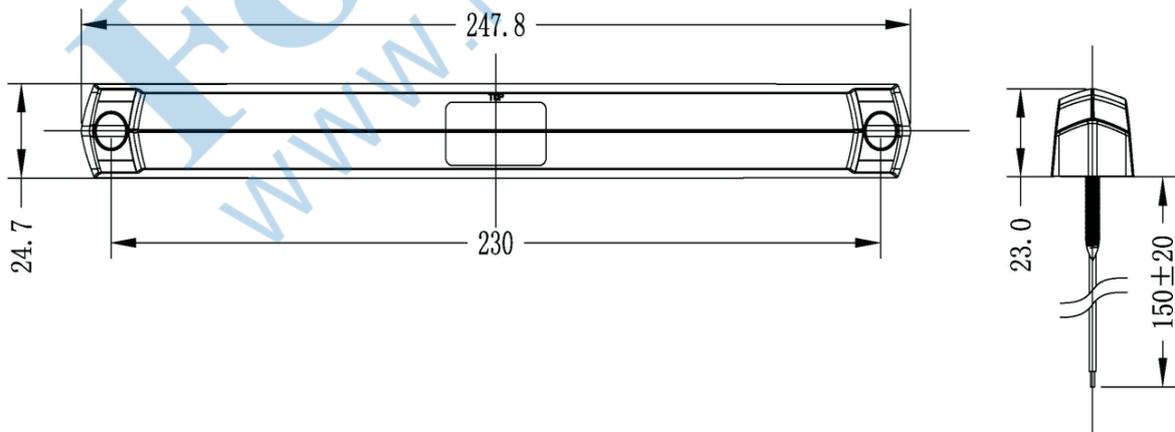



Fordalite
Guangzhou Forda Signal Co., Ltd

EFFICIENT SOLUTIONS FOR A BRIGHTER FUTURE




REV-001C2W

REV-001 reverse lamp

Voltage	12V/24V
Function	Reverse
Power	2.2W
Mount	Screws (2*ST4.2*30)
Connection	Separate wires, L= 150MM
Approve	ECE:R23
Sealing	Ultrasonic welding
IP level	IP67
Lens material	PMMA, clear
Housing material	ABS
Packing	Inner box:38*35*260mm outer carton:425*395*275mm 100PCS/carton



Size

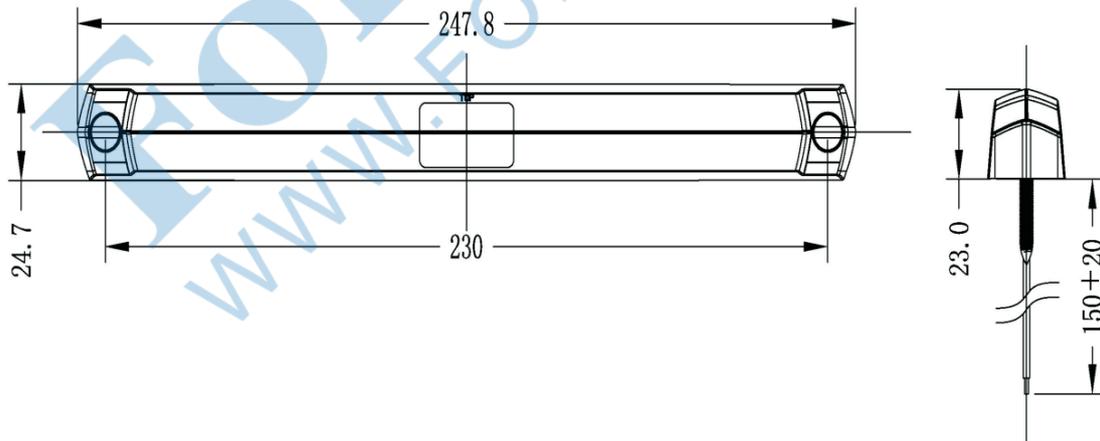




STCH-001C2R

STCH-001 high mounted stop lamp

Voltage	12V/24V
Function	High mounted stop lamp
Power	1.3W
Mount	Screws(ST4.2*30)
Connection	Separate wires,L=150MM
Approve	ECE:stop R7
Sealing	Ultrasonic welding
IP level	IP67
Lens material	PMMA
Housing material	ABS
Packing	Inner box:38*35*260mm outer carton:425*395*275mm 100PCS/carton



Size

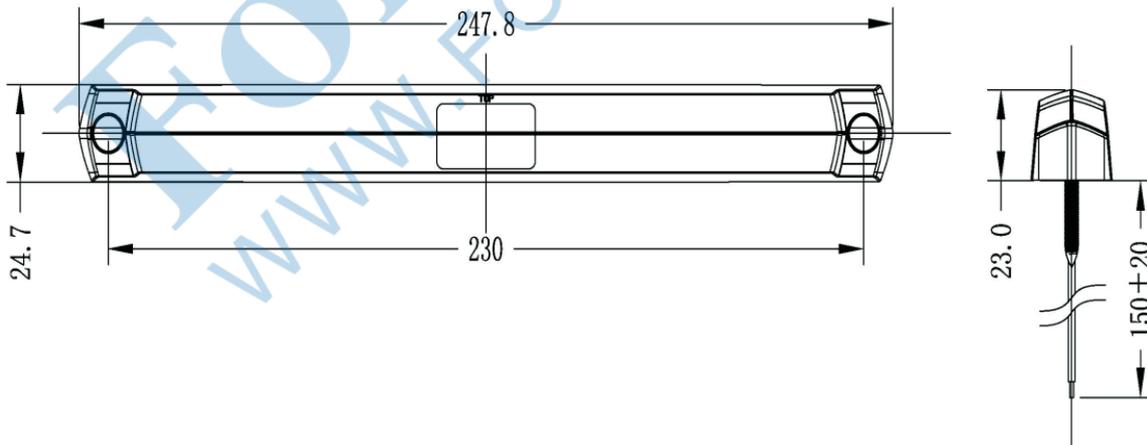



STT-001C2R

STT-001 stop/tail lamp

Voltage	12V/24V
Function	stop/tail
Power	Tail:0.4W;stop:2W
Mount	Screws(ST4.2*30)
Connection	Separate wires,L=150MM
Approve	ECE:stop R7;
Sealing	Ultrasonic welding
IP level	IP67
Lens material	PMMA red
Housing material	ABS, red
Packing	Inner box:38*35*260mm outer carton:425*395*275mm 100PCS/carton



Size

