




FTD-008

FTD-008C2AW

Voltage	10-30V
Function	Front position & DI
Power	Front position:0.8W,DI:2.5W
Mounting	Bolt
Connector	Wire,L=250MM
Approval	ECE Front position:R7,DI:R6 EMC R10.
Seal	Ultrasonic
Waterproof	IP67
Lens	PC
Bezel	ABS,White
Packing	Inner box:38*35*260mm Outer Carton:425*395*275mm Qty/Carton:100PCS



Size

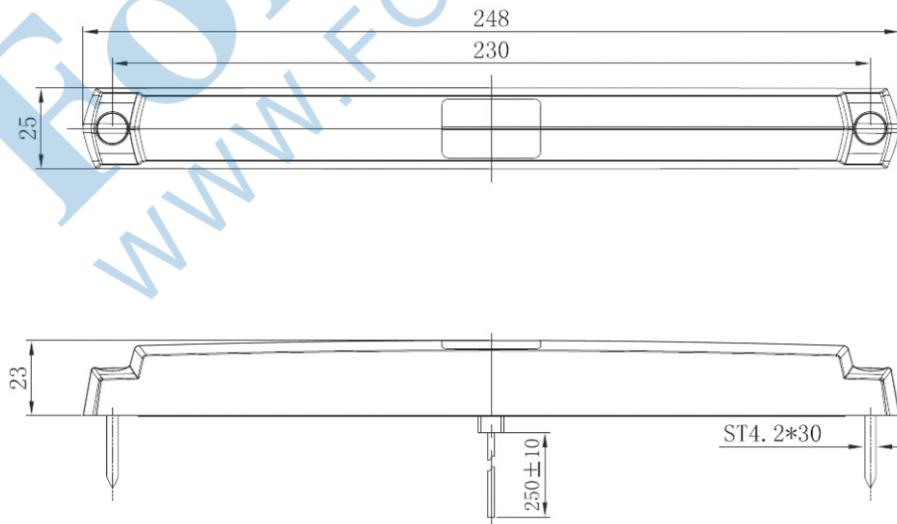




REVF-008

REVF-008C2RW

Voltage	10-30V
Function	Rear fog & Reverse
Power	Rear fog:2.5W Reverse:1.2W
Mount	2*ST4.2
Connector	Wire,L=250MM
Approval	ECE Rear fog:R38, Reverse: R23 EMC R10
Seal	Ultrasonic
Waterproof	IP67
Lens	PC
Housing	ABS,White
Packing	Inner box:38*35*260mm Outer Carton:425*395*275mm Qty/Carton:100PCS



Size

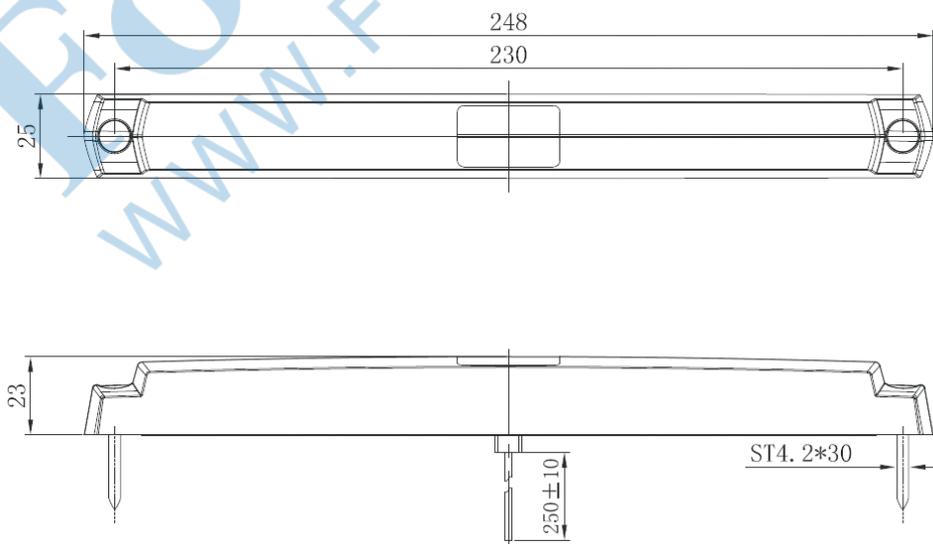



STTD-008

STTD-008C2AR

Voltage	10-30V
Function	ST/T/DI
Power	Stop:0.3W, Tail:2W, DI:1.7W
Mount	2*ST4.2
Connector	Wire,L=250MM
Approvals	ECE ST/T: R7, DI: R6 EMC R10
Sealing	Ultrasonic
Waterproof	IP67
Lens	PC
Housing	ABS,White
Packing	Inner box:38*35*260mm Outer Carton:425*395*275mm Qty/Carton:100PCS



Size

