



SIGNAL LAMP

REAR LAMP

HEAD LAMP

WORK LAMP

LIGHT BAR

DIRECTIONAL WARNING LAMP

BEACON

OTHER

The symbols listed are used in product information charts throughout this specification.

	PART NUMBER		OPERATING TEMPERATURE: -40°C to +65°C
	DESCRIPTION		IP67
	POWER CONSUMPTION		WARRANTY: 1 YEAR
	VOLTAGE		WARRANTY: 3 YEARS
	CURRENT CONSUMPTION		APPROVAL
	FUNCTION		APPROVAL: ECE R65
	MOUNTING		APPROVAL: SAE J845 CLASS 1
	FLASH PATTERNS		APPROVAL: SAE J845 CLASS 2
	FLASHES PER MINUTE		APPROVAL: SAE J845 CLASS3
	LEDs COLOR		PACKING
	LENs COLOR		Net Weight
	RED		Innerbox
	AMBER		Packing Qty
	BLUE		Outer PackingCarton
	WHITE		MAGNETIC MOUNTING
	THE NUMBER OF LED		DIN POLE MOUNTING
	CABLE LENGTH		SINGLE BOLT
	DEUTSCH CONNECTOR		SURFACE MOUNTING
	NEW PRODUCT		1"THREADED PIPE MOUNTING
	LIGHT OUTPUT: LUMEN		LENs A B R W



NEW



WK-004C3W



Low Current Consumption;
Used in all kinds of large-scale field operation,
accident emergency maintenance and disaster relief work lighting.

LENs Polycarbonate, clear

LEDs 5PCS 3W SMD LED



0.635KG




160*85*170mm





20PCS/CTN



475*355*380mm

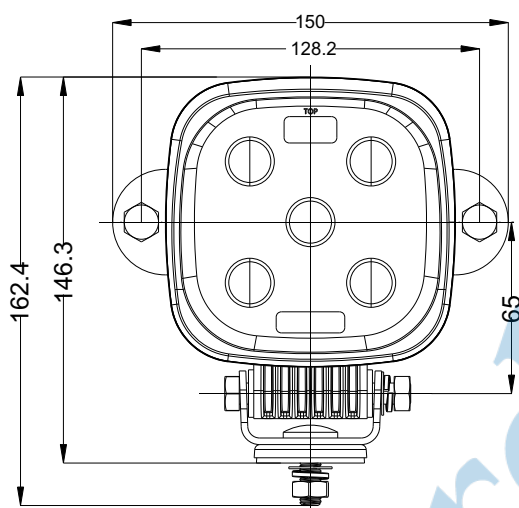

INTENSITY DISTRIBUTION: 3500cd

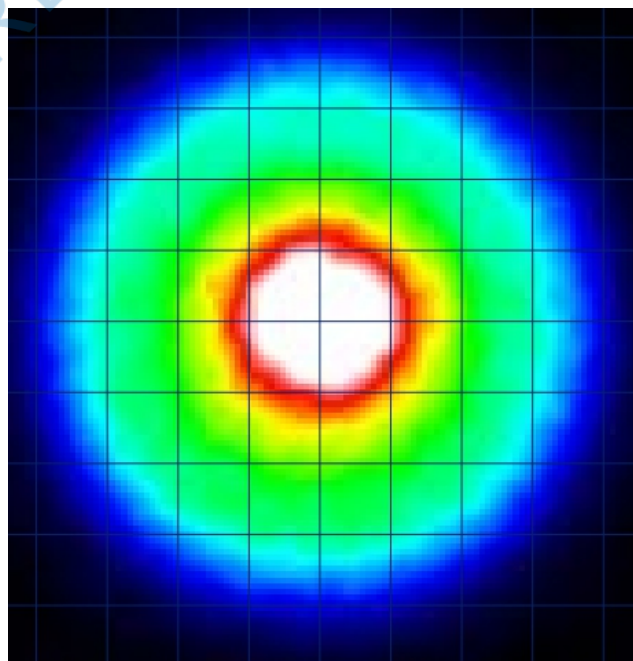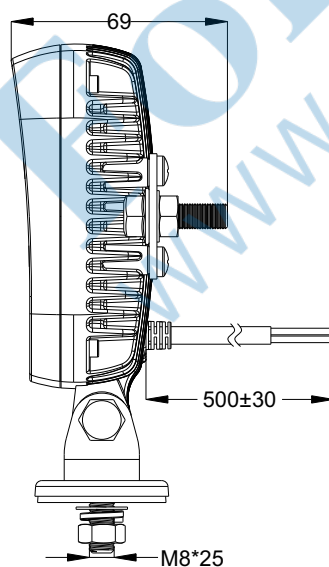

#	W	⚡	ⓔ	CA	🔌	LM	✂️
WK-004C3W	W	10-30V	ECE R10(EMC)	L=500MM	15W	1250LM	M8 Screw Mount