



- SIGNAL LAMP
- REAR LAMP
- HEAD LAMP
- WORK LAMP
- LIGHT BAR
- DIRECTIONAL WARNING LAMP
- BEACON
- OTHER

The symbols listed are used in product information charts throughout this specification.

	PART NUMBER		OPERATING TEMPERATURE: -40°C to +65°C
	DESCRIPTION		IP67
	POWER CONSUMPTION		WARRANTY: 1 YEAR
	VOLTAGE		WARRANTY: 3 YEARS
	CURRENT CONSUMPTION		APPROVAL
	FUNCTION		APPROVAL: ECE R65
	MOUNTING	<b>J845-1</b>	APPROVAL: SAE J845 CLASS 1
	FLASH PATTERNS	<b>J845-2</b>	APPROVAL: SAE J845 CLASS 2
<b>FPM</b>	FLASHES PER MINUTE	<b>J845-3</b>	APPROVAL: SAE J845 CLASS 3
	LEDs COLOR		PACKING
<b>LENs</b>	LENs COLOR		Net Weight
<b>R</b>	RED		Innerbox
<b>A</b>	AMBER		Packing Qty
<b>B</b>	BLUE		Outer PackingCarton
<b>W</b>	WHITE		MAGNETIC MOUNTING
<b>LEDs</b>	THE NUMBER OF LED		DIN POLE MOUNTING
<b>CA</b>	CABLE LENGTH		SINGLE BOLT
<b>DT</b>	DEUTSCH CONNECTOR		SURFACE MOUNTING
	NEW PRODUCT		1"THREADED PIPE MOUNTING
<b>LM</b>	LIGHT OUTPUT: LUMEN	<b>LENs</b>	



**NEW**



**WK-006C3W**

**Low Current Consumption;**  
Used in all kinds of large-scale field operation,  
accident emergency maintenance and disaster relief work lighting.

**LENS** Polycarbonate, clear

**LEDs** 9PCS 3W SMD LED



0.919KG





130\*90\*170mm




12PCS/CTN



310\*295\*380mm

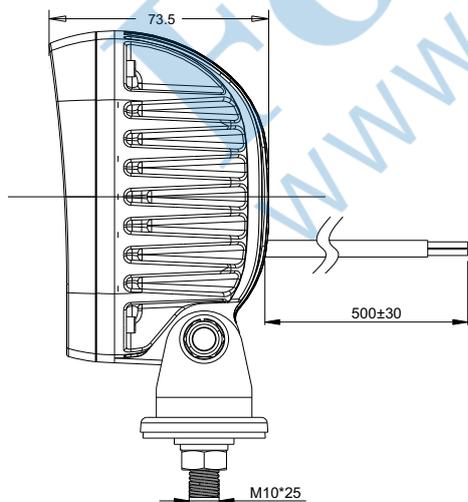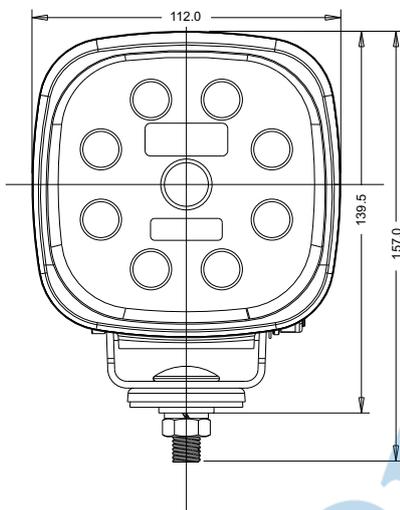

**INTENSITY DISTRIBUTION: 6500cd**

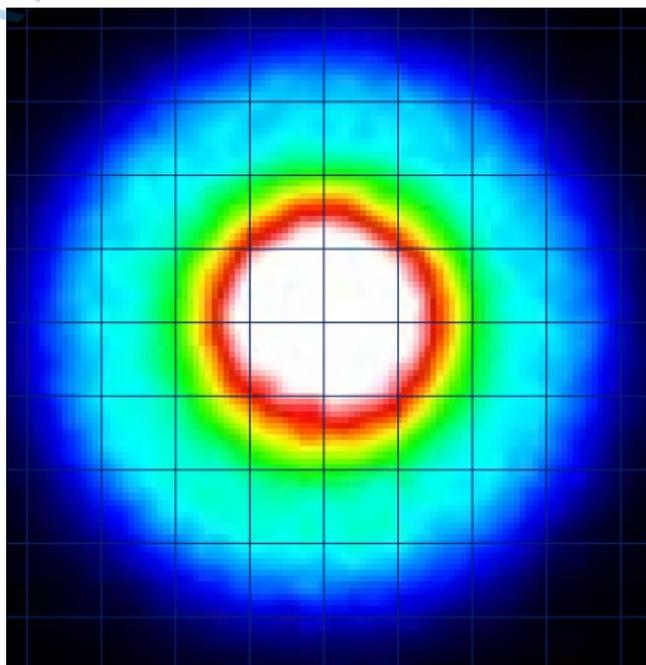

#	COL	⚡	Ⓜ	CA	🔌	LM	✂
WK-006C3W	<b>W</b>	10-30V	ECE R10(EMC)	L=500MM	27W	2250LM	M10 Screw Mount

SIGNAL LAMP  
REAR LAMP  
HEAD LAMP  
WORK LAMP  
LIGHT BAR  
DIRECTIONAL WARNING LAMP  
BEACON  
OTHER