



SIGNAL LAMP  
 REAR LAMP  
 HEAD LAMP  
 WORK LAMP  
 LIGHT BAR  
 DIRECTIONAL WARNING LAMP  
 BEACON  
 OTHER

The symbols listed are used in product information charts throughout this specification.

	PART NUMBER		OPERATING TEMPERATURE: -40°C to +65°C
	DESCRIPTION		IP67
	POWER CONSUMPTION		WARRANTY: 1 YEAR
	VOLTAGE		WARRANTY: 3 YEARS
	CURRENT CONSUMPTION		APPROVAL
	FUNCTION		APPROVAL: ECE R65
	MOUNTING	<b>J845-1</b>	APPROVAL: SAE J845 CLASS 1
	FLASH PATTERNS	<b>J845-2</b>	APPROVAL: SAE J845 CLASS 2
<b>FPM</b>	FLASHES PER MINUTE	<b>J845-3</b>	APPROVAL: SAE J845 CLASS 3
	LEDs COLOR		PACKING
<b>LENs</b>	LENs COLOR		Net Weight
<b>R</b>	RED		Innerbox
<b>A</b>	AMBER		Packing Qty
<b>B</b>	BLUE		Outer PackingCarton
<b>W</b>	WHITE		MAGNETIC MOUNTING
<b>LEDs</b>	THE NUMBER OF LED		DIN POLE MOUNTING
<b>CA</b>	CABLE LENGTH		SINGLE BOLT
<b>DT</b>	DEUTSCH CONNECTOR		SURFACE MOUNTING
	NEW PRODUCT		1"THREADED PIPE MOUNTING
<b>LM</b>	LIGHT OUTPUT: LUMEN		LENs 



SIGNAL LAMP

REAR LAMP

HEAD LAMP

WORK LAMP

LIGHT BAR

DIRECTIONAL WARNING LAMP

BEACON

OTHER



**WK-008C3W**

**Low Current Consumption;**  
Used in all kinds of large-scale field operation,  
accident emergency maintenance and disaster relief work lighting.

**LENs** Polycarbonate, clear

**LEDs** 4PCS 3W SMD LED



0.391KG





135\*70\*90mm




20PCS/CTN

393\*305\*220mm

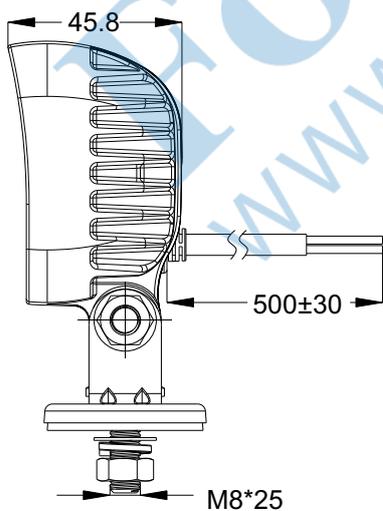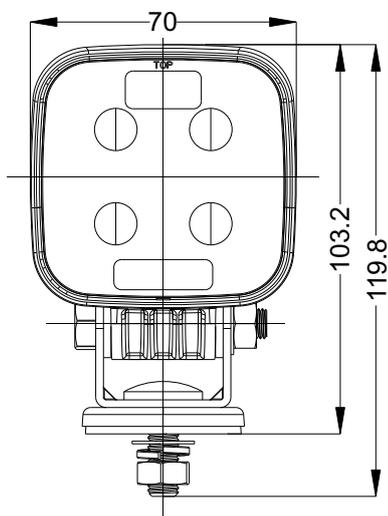

**INTENSITY DISTRIBUTION: 1670cd**

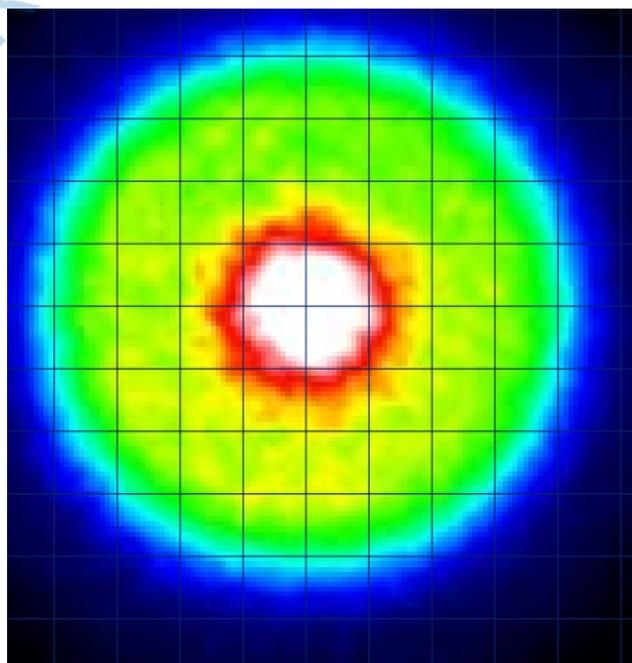

#	COL	⚡	Ⓜ	CA	🔌	LM	✂️
WK-008C3W	W	10-30V	ECE R10(EMC)	L=500MM	12W	800LM	M8 Screw Mount